



DFEC40W SERIES

CHASSIS-MOUNT DC-DC CONVERTER

4:1 ULTRA WIDE INPUT RANGE
UP TO 40 Watts



FEATURES

- NO MINIMUM LOAD REQUIRED
- 1600VDC INPUT TO OUTPUT ISOLATION
- SCREW TERMINALS FOR INPUT AND OUTPUT CONNECTIONS
- RELIABLE SNAP-ON FOR DIN RAIL TS-35/7.5 OR TS-35/15
- CASE PROTECTION MEET IP20(IEC60529)
- INTERNAL OUTPUT DC-OK INDICATOR
- MEET EN55022 CLASS B
- SAFETY MEETS UL60950-1, EN60950-1, & IEC60950-1
- CE MARKED
- COMPLIANT TO RoHS II & REACH

APPLICATIONS

- COMMUNICATION SYSTEM
- INDUSTRY CONTROL SYSTEM
- FACTORY AUTOMATIC EQUIPMENT
- SEMICONDUCTOR EQUIPMENT

1600VDC ISOLATION	REMOTE CONTROL	UVP	OCP	SCP	OVP	FUSE INCLUDED	INRUSH LIMIT	REVERSE POLARITY PROTECTION
----------------------	-------------------	-----	-----	-----	-----	------------------	-----------------	-----------------------------------

TECHNICAL SPECIFICATION

All specifications are typical at nominal input, full load and 25°C otherwise noted

Model Number	Input Range	Output Voltage	Output Current @Full Load	Input Current @ No Load	Efficiency	Maximum Capacitor Load (1)
	VDC	VDC	A	mA	%	μF
DFEC40-24S3P3W	9.5 ~ 36	3.3	10	83	85	25750
DFEC40-24S05W	9.5 ~ 36	5	8	103	86	13600
DFEC40-24S12W	9.5 ~ 36	12	3.333	56	85	2360
DFEC40-24S15W	9.5 ~ 36	15	2.666	56	85	1510
DFEC40-24S24W	9.5 ~ 36	24	1.667	76	84	600
DFEC40-24S28W	9.5 ~ 36	28	1.333	82	84	375
DFEC40-24D12W	9.5 ~ 36	±12	±1.667	65	84	±1200
DFEC40-24D15W	9.5 ~ 36	±15	±1.333	76	84	±750
DFEC40-48S3P3W	18 ~ 75	3.3	10	63	85	25750
DFEC40-48S05W	18 ~ 75	5	8	68	87	13600
DFEC40-48S12W	18 ~ 75	12	3.333	34	85	2360
DFEC40-48S15W	18 ~ 75	15	2.666	34	86	1510
DFEC40-48S24W	18 ~ 75	24	1.667	41	84	600
DFEC40-48S28W	18 ~ 75	28	1.333	41	84	375
DFEC40-48D12W	18 ~ 75	±12	±1.667	34	84	±1200
DFEC40-48D15W	18 ~ 75	±15	±1.333	34	84	±750

PART NUMBER STRUCTURE

DFEC40 -	48	S	05	W	-	N
Series Name	Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)	Input Range		Remote Control Option
	24: 9.5~36 48: 18~75	S: Single	3P3: 3.3 05: 5 12: 12 15: 15 24: 24 28: 28	4:1		□: Positive logic N: Negative logic
		D: Dual	12: ±12 15: ±15			

INPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating input voltage range	24Vin(nom) 48Vin(nom)	9.5 18	24 48	36 75	VDC
Input fuse (slow blow)	24Vin(nom) 48Vin(nom)		8 4		A
In-rush current			15		A
Input reflected ripple current	Nominal input and Full load		15		mAp-p
Start up voltage	24Vin(nom) 48Vin(nom)			9.5 18	VDC
Shutdown voltage	24Vin(nom) 48Vin(nom)		8 16		VDC
Start up time	Nominal input and Constant resistive load		100 20		ms
Input surge voltage	100ms, max. 24Vin(nom) 48Vin(nom)			50 100	VDC
Remote ON/OFF	Referred to –Vin pin Positive logic DC-DC ON (Standard) DC-DC OFF Negative logic DC-DC ON (Option) DC-DC OFF Input current of Ctrl pin 24Vin(nom) 48Vin(nom)			Open or 3 ~ 12VDC Short or 0 ~ 1.2VDC Short or 0 ~ 1.2VDC Open or 3 ~ 12VDC	
	Remote off input current	-0.5	10 5	0.5	mA mA

OUTPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Voltage accuracy	3.3Vout Others	-1.5 -1.0		+1.5 +1.0	%
Line regulation	Low Line to High Line at Full Load	-0.5		+0.5	%
Load regulation	No Load to Full Load	-2.0 -1.0		+2.0 +1.0	%
Cross regulation	Asymmetrical load 25%/100% FL	-5.0		+5.0	%
Voltage adjustability	Single output	-3 -10		+17 +10	%
Ripple and noise	Measured by 20MHz bandwidth Single Dual		50 75 100 100		mVp-p
Temperature coefficient		-0.02		+0.02	%/°C
Transient response recovery time	25% load step change		250		µs
Over voltage protection	Zener diode clamp 3.3Vout 5Vout 12Vout 15Vout 24Vout 28Vout		3.9 6.2 15 18 30 36		VDC
Output indicator				Green LED	
Over load protection	% of Iout rated; Hiccup mode			150	%
Short circuit protection				Continuous, automatic recovery	

GENERAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Isolation voltage	1 minute Input to Output Input (Output) to Chassis	1600 1600			VDC
Isolation resistance	500VDC	1			GΩ
Isolation capacitance				4500	pF
Switching frequency		270	300	330	kHz
Safety meets				UL60950-1 EN60950-1 IEC60950-1	
Chassis material				Aluminum	
Weight				182g (6.40oz)	
MTBF	MIL-HDBK-217F, Full load			7.632 x 10 ⁵	hrs

ENVIRONMENTAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating ambient temperature	Without derating With derating	-40 +63		+63 +87	°C
Storage temperature range		-40		+105	°C
Thermal shock				MIL-STD-810F	
Vibration				MIL-STD-810F	
Relative humidity				5% to 95% RH	


EMC SPECIFICATIONS

Parameter	Conditions	Level
EMI	EN55022	Class B
ESD	EN61000-4-2 Air ± 8 kV and Contact ± 6 kV	Perf. Criteria A
Radiated immunity	EN61000-4-3 10V/m	Perf. Criteria A
Fast transient	EN61000-4-4 ± 2 kV	Perf. Criteria A
Surge	EN61000-4-5 ± 1 kV	Perf. Criteria A
Conducted immunity	EN61000-4-6 10Vr.m.s	Perf. Criteria A


Note:

1. Test by minimum input and constant resistive load.


CHARACTERISTIC CURVE

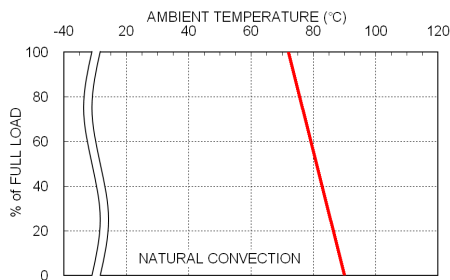

DFEC40-48S05W Derating Curve

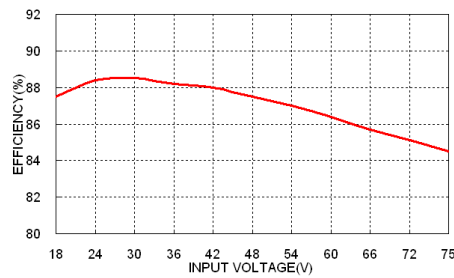


DFEC40-48S05W Efficiency vs. Input Voltage

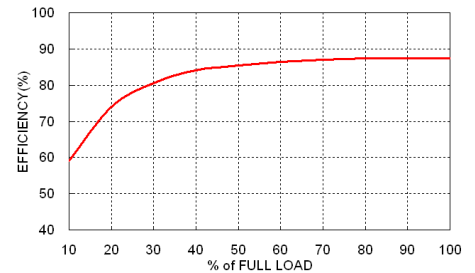

DFEC40-48S05W Efficiency vs. Output Load

MECHANICAL DRAWING

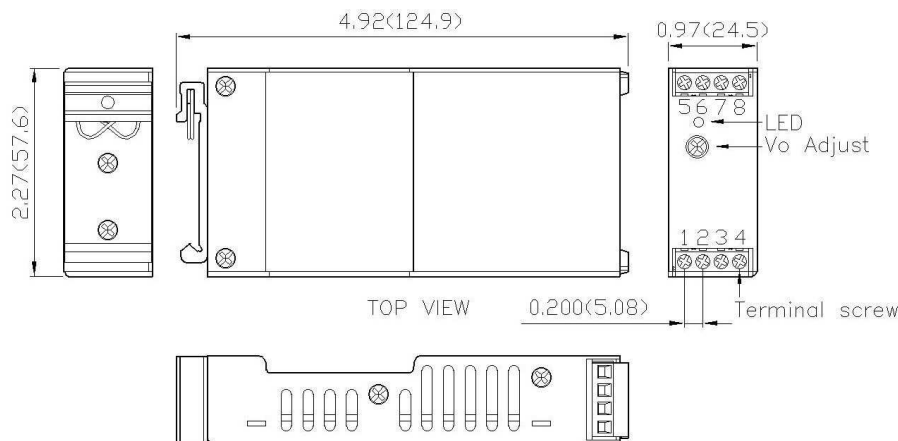

PIN CONNECTION

PIN	SINGLE	DUAL
1	Ctrl	Ctrl
2	-Vin	-Vin
3	-Vin	-Vin
4	+Vin	+Vin
5	NC	NC
6	-Vout	-Vout
7	+Vout	Common
8	NC	+Vout

* NC : No Connection

* Screw terminals – wire range from 14 to 18 AWG

1. All dimensions in Inch (mm)
2. Tolerance : X.XX $\pm$ 0.02 (X.X $\pm$ 0.5)
X.XXX $\pm$ 0.01 (X.XX $\pm$ 0.25)
3. Terminal screw locked torque :
MAX 2.5kgf-cm (0.25N-m)