

**FEATURES**

- ▶ Fully encapsulated Plastic Case
- ▶ 2 Mounting Versions:
  - Chassis Mounting with Screw Terminals
  - DIN-Rail Mounting
- ▶ Ultra-wide Input Ranges: 9-36VDC and 18-75VDC
- ▶ Extended Operating Temp.Range: -40°C to +80°C
- ▶ LED Output Indicator
- ▶ Remote On/Off
- ▶ Input Polarity Protection
- ▶ Input Filter meets EN 55022,class A and FCC, level A
- ▶ Safety to UL/cUL/IEC/EN 60950-1 (pending)
- ▶ 3 Years Product Warranty


**PRODUCT OVERVIEW**

The MINMAX MOWI20C series is a new range of regulated DC/DC converter modules with ultra-wide 4:1 input voltage ranges. The product comes in a fully encapsulated module with screw terminal block and is suitable for easy chassis mounting or also for DIN-rail mounting.

Featuring an extended operating temperature range from -40°C to +80°C at full load, input polarity protection, EMC compliance to EN 61000-6-1 standard these modules have been designed particularly for industrial applications.

**Model Selection Guide**

Model Number	Input Voltage (Range) VDC	Output Voltage VDC	Output Current		Input Current		Max. capacitive Load μF	Efficiency (typ.) @Max. Load %
			Max.	@ Max. Load	@ No Load			
			mA(typ.)	mA(typ.)	mA(typ.)			
MOWI20-24S051C	24 (9 ~ 36)	5.1	4000	944	70	6800	90	
MOWI20-24S12C		12	1670	918	70	1160	91	
MOWI20-24S24C		24	835	918	70	300	91	
MOWI20-24S48C		48	420	944	70	75	89	
MOWI20-48S051C	48 (18 ~ 75)	5.1	4000	472	35	6800	90	
MOWI20-48S12C		12	1670	459	35	1160	91	
MOWI20-48S24C		24	835	459	35	300	91	
MOWI20-48S48C		48	420	472	35	75	89	

**Input Specifications**

Parameter	Model	Min.	Typ.	Max.	Unit	
Input Surge Voltage (100 ms max.)	24V Input Models	-0.7	---	50	VDC	
	48V Input Models	-0.7	---	100		
Start-Up Threshold Voltage	24V Input Models	---	---	9		
	48V Input Models	---	---	18		
Under Voltage Lockout	24V Input Models	---	7.5	---		
	48V Input Models	---	16	---		
Input Polarity Protection		Yes				
Start Up Time	Power Up	Nominal Vin and Constant Resistive Load	---	---	30	ms
	Remote On/Off		---	---	30	ms
Short Circuit Current	Hiccup Mode, 0.25 Hz typ.					

**Output Specifications**

Parameter	Conditions	Min.	Typ.	Max.	Unit	
Output Voltage Setting Accuracy		---	±2.0	---	%Vnom.	
Line Regulation	Vin=Min. to Max. @Full Load	---	±0.5	---	%	
Load Regulation	Min. Load to Full Load	---	±0.5	---	%	
Min.Load	No minimum Load Requirement					
Ripple & Noise	0-20MHz bandwidth	5.1V Output Models	---	---	100	mV <sub>p-p</sub>
		12V & 24V Output Models	---	---	150	mV <sub>p-p</sub>
		48V Output Models	---	---	200	mV <sub>p-p</sub>
Transient Recovery Time	25% Load Step Change <sup>(2)</sup>	---	250	---	μsec	
Over Voltage Protection	Zener diode clamp		120		% of Vo	
Temperature Coefficient		---	±0.02	---	%/°C	
Overshoot		---	---	5	%	
Over Load Protection	Current Limitation at 150% typ. of Iout max., Hiccup Mode, automatic recovery					
Short Circuit Protection	Hiccup Mode, automatic recovery					

**General Specifications**

Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage (rated)	60 Seconds	2500	---	---	VDC
I/O Isolation Resistance	500 VDC	1000	---	---	MΩ
I/O Isolation Capacitance	100KHz, 1V	---	---	2200	pF
Switching Frequency		---	285	---	KHz
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign		667600		Hours
Safety Approvals(pending)	UL/cUL 60950-1 recognition, IEC/EN60950-1 (CB-scheme)				

**Remote On/Off Control**

Parameter	Conditions	Min.	Typ.	Max.	Unit
Converter On		3.5V ~ 12V or Open Circuit			
Converter Off		0V ~ 1.2V or Short Circuit			
Control Input Current (On)	Vctrl = 5.0V	---	---	0.5	mA
Control Input Current (Off)	Vctrl = 0V	---	---	-0.5	mA
Control Common	Referenced to Negative Input				
Standby Input Current	Supply Off & Nominal Vin	---	3	---	mA

**Environmental Specifications**

Parameter	Conditions	Min.	Max.	Unit
Operating Temperature Range Natural Convection <sup>(7)</sup> Nominal Vin, 100% Load	All Models	-40	+80	°C
Thermal Impedance	Natural Convection	3.9	---	°C/W
	100LFM Convection	3.3	---	°C/W
	200LFM Convection	3.1	---	°C/W
	400LFM Convection	2.5	---	°C/W
Case Temperature		---	+95	°C
Storage Temperature Range		-50	+125	°C
Humidity (non condensing)		---	95	% rel. H
Cooling	Free-Air convection			
Lead Temperature (1.5mm from case for 10Sec.)		---	260	°C

**EMC Specifications**


Parameter	Standards & Level	Performance
Conducted EMI	EN55022, FCC part 15	Class A
ESD	EN61000-4-2 air ± 8kV, Contact ± 4kV	A
Radiated immunity	EN61000-4-3 10V/m	A
Fast transient <sup>(6)</sup>	EN61000-4-4 ±2kV	A
Surge <sup>(6)</sup>	EN61000-4-5 ±0.5kV	A
Conducted immunity	EN61000-4-6 10Vrms	A

**Notes**

- 1 Specifications typical at Ta=+25°C, resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%.
- 3 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 4 Other input and output voltage may be available, please contact factory.
- 5 Part number for DIN-Rail mounting bracket: **AC-DIN-01**.
- 6 The MOWI20C series can meet EN61000-4-4 & EN61000-4-5 by adding a capacitor across the input pins. Suggested capacitor: CHEMI-CON KXG 330uF/200V.
- 7 Natural convection means an airflow of 20LFM is not equal to still air (0 LFM).
- 8 Specifications are subject to change without notice.

Tentative



**Package Specifications Chassis Mounting**

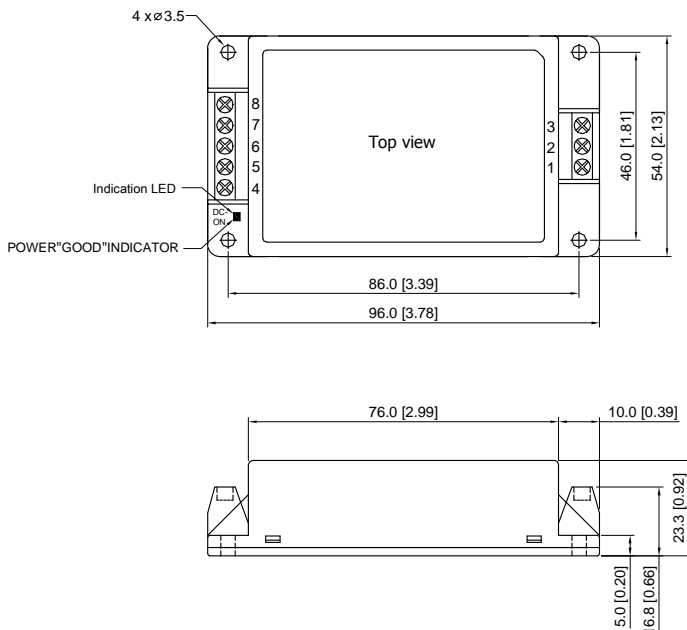Mechanical Dimensions		Connections																			
		<table border="1"> <thead> <tr> <th>Pin</th> <th>Function</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Remote On/Off</td> </tr> <tr> <td>2</td> <td>-Vin</td> </tr> <tr> <td>3</td> <td>+Vin</td> </tr> <tr> <td>4</td> <td>NC</td> </tr> <tr> <td>5</td> <td>-Vout</td> </tr> <tr> <td>6</td> <td>NC</td> </tr> <tr> <td>7</td> <td>+Vout</td> </tr> <tr> <td>8</td> <td>NC</td> </tr> </tbody> </table>		Pin	Function	1	Remote On/Off	2	-Vin	3	+Vin	4	NC	5	-Vout	6	NC	7	+Vout	8	NC
Pin	Function																				
1	Remote On/Off																				
2	-Vin																				
3	+Vin																				
4	NC																				
5	-Vout																				
6	NC																				
7	+Vout																				
8	NC																				
		NC: No Connection																			
		All dimensions in mm (inches) Tolerance: ±0.5 (±0.02)																			

**Physical Characteristics**

Case Size	: 96.0x54.0x23.3mm (3.78x2.13x0.92 inches)
Case Material	: Plastic resin (flammability to UL 94V-0 rated)
Weight	: 107g

**Package Specifications with DIN Rail Mounting Bracket (order code AC-DIN-01)**

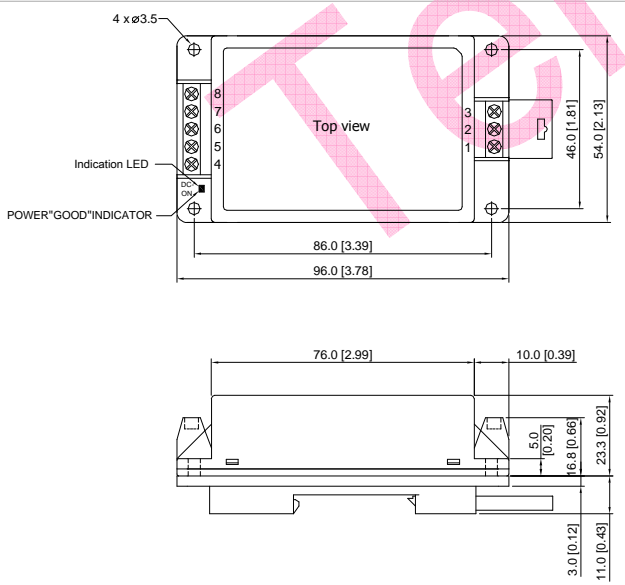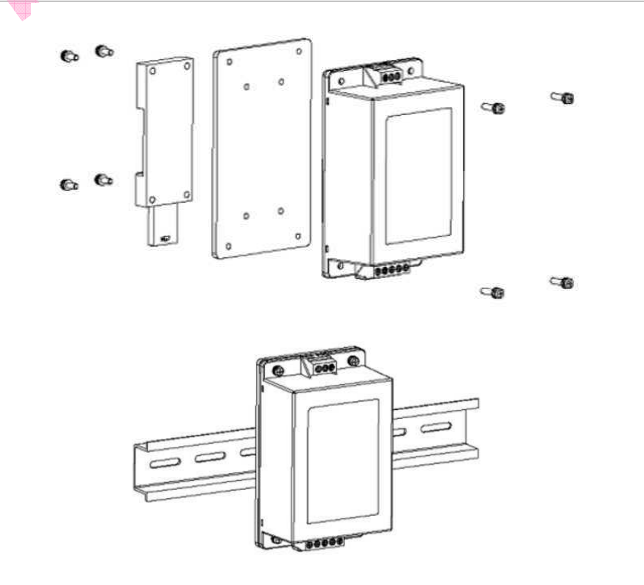Mechanical Dimensions		DIN-Rail Mounting Kit	
			


**Physical Characteristics**

Case Size	: 96.0x54.0x23.3mm (3.78x2.13x0.92 inches)
Case Material	: Plastic resin (flammability to UL 94V-0 rated)
Weight	: 166g

## Test Setup


### Input Reflected-Ripple Current Test Setup

Input reflected-ripple current is measured with an inductor  $L_{in}$  (4.7 $\mu$ H) and  $C_{in}$  (220 $\mu$ F, ESR < 1.0 $\Omega$  at 100 KHz) to simulate source impedance. Capacitor  $C_{in}$ , offsets possible battery impedance. Current ripple is measured at the input terminals of the module, measurement bandwidth is 0-500 KHz.

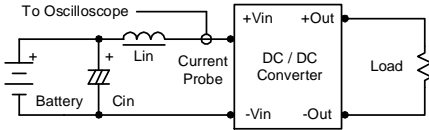

### Peak-to-Peak Output Noise Measurement Test

Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC/DC Converter.

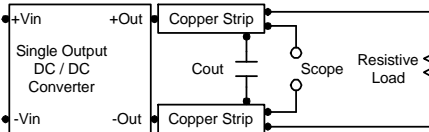

## Technical Notes

### Remote On/Off

Positive logic remote on/off turns the module on during a logic high voltage on the remote on/off pin, and off during a logic low. To turn the power module on and off, the user must supply a switch to control the voltage between the on/off terminal and the -Vin terminal. The switch can be an open collector or equivalent. A logic low is 0V to 1.2V. A logic high is 3.5V to 12V. The maximum sink current at the on/off terminal (Pin 1) during a logic low is -100 $\mu$ A.

### Overcurrent Protection

To provide hiccup mode protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure overload for an unlimited duration.

### Overvoltage Protection


The output overvoltage clamp consists of control circuitry, which is independent of the primary regulation loop, that monitors the voltage on the output terminals. The control loop of the clamp has a higher voltage set point than the primary loop. This provides a redundant voltage control that reduces the risk of output overvoltage. The OVP level can be found in the output data.

### Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module.


In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup.

Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1.0  $\Omega$  at 100 KHz) capacitor of a 10 $\mu$ F for the 24V and 48V devices.

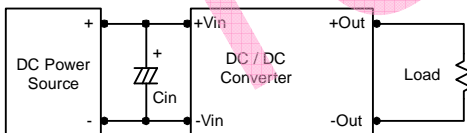

### Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 4.7 $\mu$ F capacitors at the output.

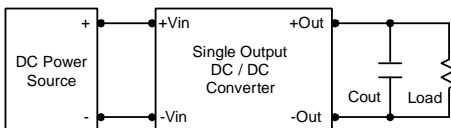

### Maximum Capacitive Load

The MOWI20C series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the data sheet.

### Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 95°C. The derating curves are determined from measurements obtained in a test setup.

