


## Single-Socket Embedded Platform




### S3115

S3115GM2N/ S3115GM2N-B/ S3115GMN/  
S3115GN

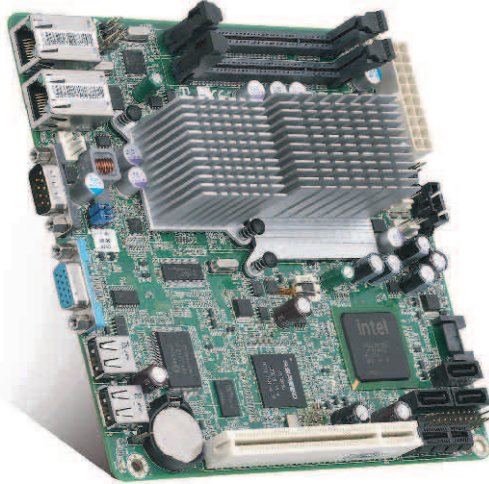

#### Single-socket embedded platform with optional IPMI support



#### ■ Intel® 945GC Chipset

- 1 Single Intel® dual-core Atom®330 processor
- 1 Support FSB 533 MHz
- 1 Intel®945GC GMCH
- 1 Intel®ICH7 South Bridge
- 1 (2) DDR2 SO-DIMM slots support up to 2GB U-DDR2 667/533MHz memory
- 1 (1) PCI 32/33MHz slot
- 1 (1) PCI-Ex1 slot in-lined with PCI slot (S3115GM2N/ S3115GMN/ S3115GN)
- 1 (4) SATA-II connectors (S3115GM2N/ S3115GMN/ S3115GN)
- 1 (2) GbELAN (S3115GM2N/ S3115GM2N-B)
- 1 Onboard iBMCw/ IPMI and iKVM support (S3115GM2N/ S3115GM2N-B/ S3115GMN)
- 1 Mini-ITX (6.57" x 6.69") form factor

