


QUAD-SOCKET SERVER PLATFORM



S8812
S8812WGM3NR



■ AMD Opteron™ 6100 / 6200 series

High-performance quad-socket server platform for enterprise & HPC applications


- Quad G34 sockets support AMD Opteron™ 6100/ 6200/ 6300 series processors (Magny-Cours/ Interlagos/ Abu Dhabi)
- Support (4) HyperTransport™ 3.0 link, max. bandwidth up to 25.6 GB/s @ 6.4GT/s per link
- AMD SR5690 + SP5100
- (32) 240-pin DDR3 DIMM slots support up to 512GB R-DDR3 1333/1066/800MHz w/ ECC memory
- (1) PCI-E Gen.2 x16 slot (w/ x16 or x8 link)
- (1) PCI-E Gen.2 x8 slot (w/ x0 or x8 link)
- (2) PCI-E Gen.2 x8 slots
- (1) SATA-II connector for optional ODD
- (8) SAS 6G ports via (2) Mini-SAS connectors w/ RAID 0, 1, 1E, 10 support
- (3) GbE LAN
- Onboard BMC w/ IPMI and iKVM support
- MEB (16.2" x 13") form factor



S8812

S8812WGM3NR

Processor	Supported CPU Series	AMD Opteron™ processors 6100/6200/6300 series	
	Socket Type / Q'ty	G34 / (4)	
	Average CPU Power (ACP) wattage	Up to 105W	
	System Bus	Support (4) HyperTransport™ 3.0 link, max. bandwidth up to 25.6 GB/s @ 6.4GT/s per link	
Chipset	Chipset	AMD SR5690 + SP5100	
	Super I/O	Winbond W83627DHG-P	
Memory	Supported DIMM Qty	(8+8+8+8) DIMM slots	
	DIMM Type / Speed	DDR3 1333/1066/800 RDIMM	
	Capacity	Up to 512GB RDIMM	
	Memory channel	16 Channels (4 Channels per CPU)	
Expansion Slots	PCI-E	(1) PCI-E Gen.2 x16 slot (w/ x16 or x8 link) (1) PCI-E Gen.2 x8 slot (w/ x0 or x8 link) (2) PCI-E Gen.2 x8 slots	
	4U Barebone	FT48-B8812	
LAN	Port Q'ty	(3)	
	Controller	Intel® 82576EB Intel® 82574L	
Storage	SAS (opt.)	Connector	(8)
		Controller	LSI SAS2008
		Speed	6.0 Gb/s
	SATA	RAID	RAID 0/1/1E/10 (LSI Integrated RAID)
		Connector	(1)
		Controller	AMD SP5100
Graphic	Resolution	1600x1200@60Hz	
	Chipset	Aspeed AST2050	
Input /Output	USB	(7) USB2.0 ports (2 at rear, 4 via cable, 1 type A onboard)	
	COM	(2) ports (1 at rear, 1 via cable)	
	PS/2	(1) PS/2 connector	
	SAS	(2) Mini-SAS (4-in-1) connectors	
	VGA	(1) D-Sub 15-pin VGA port	
	RJ-45	(3) GbE ports	
	Power	Universal 24-pin + 8-pin + 8-pin & ATX12V 4-pin auxiliary power connectors	
	Front Panel	(1) 2x12 pin SSI front panel header	
	SATA	(1) SATA-II connector	
	System Monitoring	Chipset	Winbond W83795G
Voltage		Monitors voltage for CPU, memory, chipset & power supply	
Fan		Total (9) 4-pin headers	
Temperature		Monitors temperature for CPU & system environment	
Others		Chassis intrusion detection Watchdog timer support	

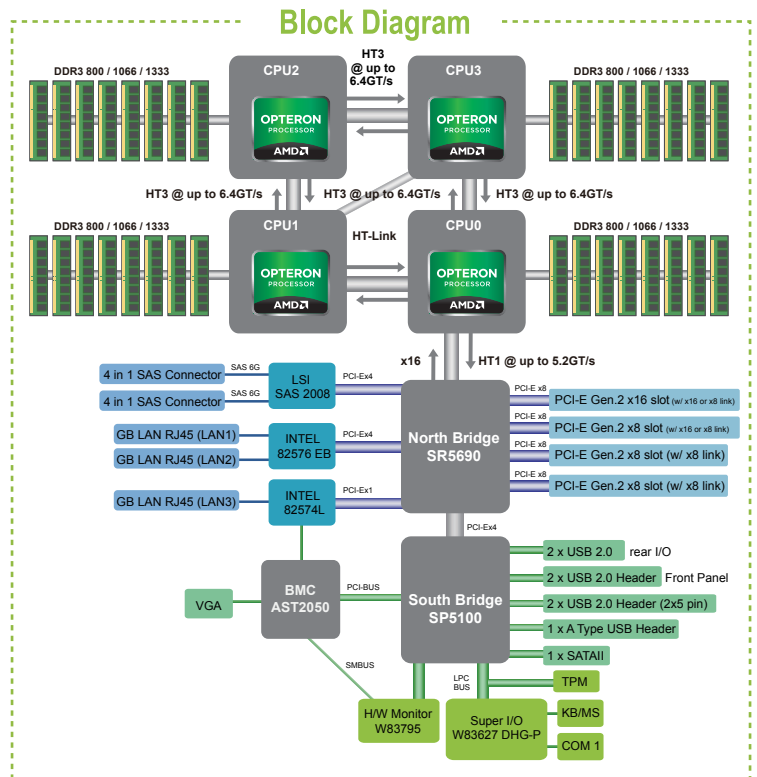

Server Management	Onboard Chipset	Onboard Aspeed AST2050
	AST2050 IPMI Feature	IPMI 2.0 compliant baseboard management controller (BMC) BIOS update USB 2.0 virtual hub
	AST2050 iKVM Feature	24-bit high quality video compression Dual 10/100 Mb/s MAC interfaces
BIOS	Brand / ROM size	AMI / 4MB
	Feature	Plug and Play (PnP) / PCI 2.3 WfM2.0 / SMBIOS2.3 / PXE boot ACPI 2.0 power management Power on mode after power recovery User-configurable H/W monitoring Auto-configurable of hard disk types Multiple boot options
Form Factor	Form Factor	MEB
	Board Dimension	16.2"x13" (411.48x330mm)
Operating System	OS supported list	Please refer to our OS supported list.
Regulation	FCC (DoC)	Class A
	CE (DoC)	Yes
Operating Environment	Operating Temp.	10° C ~ 35° C (50° F ~ 95° F)
	Non-operating Temp.	- 40° C ~ 70° C (-40° F ~ 158° F)
	In/Non-operating Humidity	90%, non-condensing at 35° C
RoHS	RoHS 6/6 Compliant	Yes

(Specifications are subject to change without notice. Items pictured may only be representative.)