


## NETWORK ADAPTER

# P1115

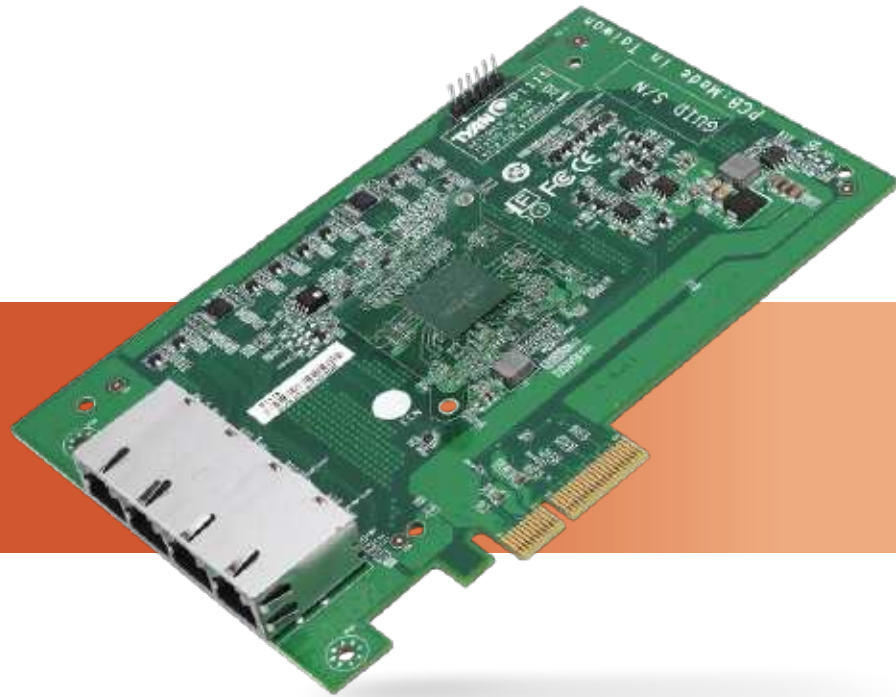

### **Quad-Port GbE standards-based RJ45 adapter with PXE boot, iSCSI and TCP offload features**

- Broadcom® BCM5719
- (4) GbE RJ45 connectors
- Full-height PCI Express form factor
- H3.87" x D6.60" (H98.4mm x D167.65mm)



# P1115

## Network Adapter



### ■ Broadcom® NetXtreme II® BCM5719

Ethernet Controller	Controller	Broadcom® BCM5719	Operating System	OS supported list	<ul style="list-style-type: none"> <li>Windows Server® 2008, 2008 R2</li> <li>Red Hat® Enterprise Linux® Server, 6.3</li> </ul>	
	IEEE standard/Network	10/100/1000 BASE-T		Regulation	FCC	Class A
Connector	Type	RJ45	CE		Yes	
	Qty	4	VCCI		Yes	
Host Bus Type	Interface	PCI-E Gen2 x 4	CTICK		Yes	
	Network	Feature	<ul style="list-style-type: none"> <li>TCP/UDP stateless offloads for IPv4 and IPv6</li> <li>Message Signal interrupts (MSI, MSI-X)</li> <li>WOL support / PXE boot support / iSCSI support</li> <li>Message Signal interrupts (MSI, MSI-X) support</li> <li>VLAN support</li> </ul>	Operating Environment	Operating Temp.	10° C ~ 35° C (50° F ~ 95° F)
Non-operating Temp.			- 40° C ~ 70° C (-40° F ~ 158° F)			
Physical Dimension			Form Factor	Full-height	In/Non-operating Humidity	90%, non-condensing at 35° C
			Dimension	H3.87" x D6.60" (H98.4mm x D167.65mm)	RoHS	Yes

(Specifications are subject to change without notice. Items pictured may only be representative.)

**MITAC INTERNATIONAL CORP.**  
TYAN Business Unit

**USA**  
Tel: +1-510-651-8868  
Fax: +1-510-651-7688

**Taiwan**  
Tel: +886-2-2652-5888  
Fax: +886-2-2652-5805

**Japan**  
Tel: +81-3-3769-8311  
Fax: +81-3-3769-8328

**Europe**  
Sales: +32 2456 1721  
Technical Support: +32 2456 1722

**China**  
Shanghai Tel: +86-21-61431188 Ext 1366  
China Tel: +86-010-62555015 Ext 8302

