

PRODUCT SPECIFICATION


DATE	REV	ECN	DESCRIPTION
6/23/2009	A	20963	SPECIFICATION CREATED

Parent Number: F14096-

Description: 14 41/30 TC AWM 3271 or 3289 or 3321
or 3505 CL 1503 or AWM I A/B EBXLPE

DIAMETER: 0.138

TOLERANCE ±: 0.004

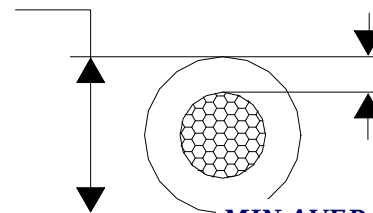

MIN AVERAGE WALL: 0.030

MINIMUM WALL: 0.027

Stranding: 41/30 TC LHL

Style: UL: AWM 3271 or 3289 or 3321 or 3505 CSA: CL 1503 or
AWM I A/B

Insulation: Irradiated XLPE

Print Legend: 14 AWG (2.08mm²) E96824 (U) (AWM LOGO) AWM 3271/3289/3505/3321 150C 600V IRR-XLPE -- 156016 CSA CL1503 150C 600V FT2 OR
AWM I A/B 150C 600V FT1 -- MADE IN USA

Voltage: 600V

Temperature: AWM 3271 = 125C; AWM 3289, 3321, 3505 = 150C

Notes: 1. Maximum DC Resistance at 20C = 2.82 Ohms/1,000ft per UL 1581.

This product complies with European Directive 2002/95/EC (RoHS)

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Coleman Cable's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Coleman Cable or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Coleman Cable's standard terms and conditions contained therein, including without limitation Coleman Cable's standard warranty. Coleman cable disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable.

Customer Approval:

Customer Part Nbr(s): _____

Approved By: _____ **Date:** _____

Title: _____ **Company Name:** _____

COLEMAN CABLE, INC

1530 Shields Drive
Waukegan, IL 60085

Phone: 1-800-323-9355

www.colemancable.com

