

PRODUCT SPECIFICATION


DATE	REV	ECN	DESCRIPTION
2/8/2006	B	11313	UPDATED DESCRIPTION

Parent Number: F4T030-

Description: 4/0 19x29/24 TC THHW FOR CT USE OR
MTW OR BC-5W2 OR AWM 1232/1284/1338
OR 10269 TEW or AWM I A/B SGT per J1127

DIAMETER: 0.740

TOLERANCE $\pm$: 0.010

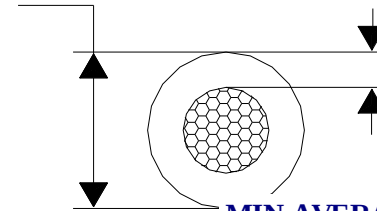

MIN AVERAGE WALL: 0.080

MINIMUM WALL: 0.072

Stranding: 19x29/24 TC LHL

Style: UL: THHW FOR CT USE or MTW or BC-5W2 or AWM
1232/1284/1338 or 10269 CSA: TEW or AWM I A/B SAE:
SGT per J1127

Insulation: PVC

Print Legend: 4/0 AWG (107mm²) E125352 (PLANT ID CODE) (UL) BC-5W2 OR MTW OR THHW FOR CT USE OR AWM 1232/1284/1338 600V OR 10269
1000V OIL RES I SUN RES VW-1 -- 156016 CSA TEW 105C 600V FT1 OR AWM I A/B 105C 600V FT1 W75 O -- SAE J1127 TYPE SGT

Voltage: 600V or AWM 10269 = 1,000V

Temperature: Dry 105C, Wet 75C

Notes: 1. Max Resistance = 0.0525 Ohms/MFT per UL1581

This product complies with European Directive 2002/95/EC (RoHS)

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Coleman Cable's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Coleman Cable or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Coleman Cable's standard terms and conditions contained therein, including without limitation Coleman Cable's standard warranty. Coleman cable disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable.

Customer Approval:

Customer Part Nbr(s): _____

Approved By: _____ **Date:** _____

Title: _____ **Company Name:** _____

COLEMAN CABLE, INC

1530 Shields Drive
Waukegan, IL 60085

Phone: 1-800-323-9355

www.colemancable.com

