



PRODUCT DATA SHEET

Controlled Document – Engineering Drive

1530 Shields Drive
Waukegan, IL 60085
Toll-Free (800) 323-9355
Fax: (847) 689-1192

PART NUMBER: 92002-xx-08

DESCRIPTION: RG 62/U TYPE LOW LOSS COAXIAL CABLE WITH 95% BRAID

RATING: UL LISTED AS CL2
UL RECOGNIZED COMPONENT AWM STYLE 1478
IBM EQUIVALENT P/N 323921

Construction Parameters:


	<u>Wall (in)*</u>	<u>OD (in)*</u>
Conductors: 22 AWG (1/.025) Solid Copper Clad Steel (40% Conductivity)		0.025
Assembly: Solid 0.035 Polyethylene Monofilament wrapped in a helical application around the conductor	0.025	0.095
Insulation: A tube of solid polyethylene applied over the conductor and Monofilament		0.144
Shielding: 95% Bare Copper Braid		0.174
Jacket: PVC	0.034	0.242

Electrical Properties:

	<u>VALUE*</u>
Conductor Resistance (ohms/kft):	42
Impedance (ohms):	93
Capacitance (pF/ft):	13.5
Velocity of Propagation (%):	84
Attenuation (Max db/100 ft): 50 MHz	1.9
100 MHz	2.7
200 MHz	3.8
400 MHz	5.4
900 MHz	8.3

Cable Cross-section:

(NOT TO SCALE)

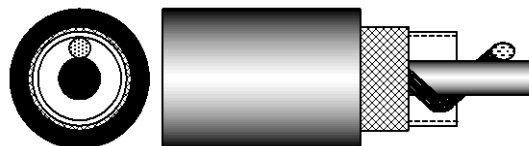

Miscellaneous Information:

Jacket Color:	Black
Applicable NEC Article:	725
Flame Rating:	UL-1581 Vertical Tray Flame Test
Maximum Temperature Rating:	75° C
Max. Operating Volts:	30 RMS
Jacket Print(Blue):	CCI 92002 RG 62 A/U TYPE CL2 22 AWG 75C (UL) OR AWM STYLE
ASCENDING/DESCENDING	1478 E100316 P/N 323921 WO #XXXXXX
FOOTAGE MARKING	
Approximate Weight (lb/1000 ft):	30

On special orders the customer will accept all factory lengths and $\pm 10\%$ of total order requested.

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Coleman Cable's control, all product data presented is for informational purposes only and does not create a binding obligation or liability on Coleman Cable or confer any rights on any customer. The sale of product (s) is conditioned upon acceptance of a purchase order subject to Coleman Cable's standard terms and conditions contained therein, including without limitation Coleman Cable's standard warranty. Coleman cable disclaims all liability in connection with the use of information contained herein or otherwise