




PRODUCT SPECIFICATION

CATALOG NUMBER: See table below
DESCRIPTION: 10/4 SEOOW adapter cord with 125/250V range plug and twist-to-lock 30A cord connector

CONSTRUCTION PARAMETERS:

Cable type: 10/4 SEOOW
Conductors: 10 ga bare copper, 104/30 stranding
Jacket material: TPE, black
Overall cable O.D. (nom): 0.705 in.
Cord rating: Extra Hard Usage per the National Electrical Code

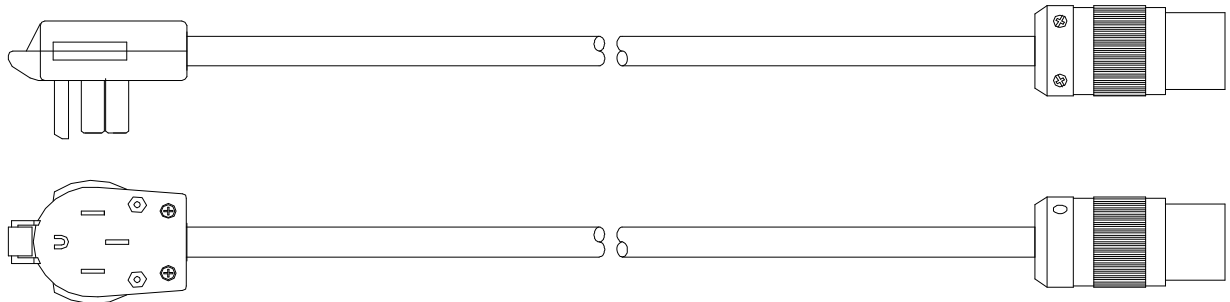

Note: Plug style may vary

Cord length (nom): See table below
Attachment plug configuration: NEMA 14-50P (range plug)
Cord connector configuration: NEMA L14-30R twist-to-lock
Plug material: PVC, black
Cord connector material: Nylon, white body with black backshell

ELECTRICAL AND PHYSICAL PROPERTIES:

Cable temperature rating: -50 to +105 °C
Nominal operating voltage: 125/250 VAC
Maximum operating current: 30A

CATALOG NUMBERS:

| Catalog number | Length |
|----------------|--------|
| 01864 | 10 ft |

The information presented here is, to the best of our knowledge, true and accurate. However, since conditions of use are beyond our control, all recommendations or suggestions are presented without guarantee or responsibility on our part. We disclaim all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable Inc. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable Inc.