

PRODUCT SPECIFICATION

CATALOG NUMBER: 01970-3R-02

PRODUCT DESCRIPTION: Construction-site portable

power distribution box

NRTL APPROVAL: ETL Listed to UL 1640 and

CAN/CSA C22.2 No. 14



PRODUCT DESCRIPTION

Power inlet: 50A 125/250V California Standard twist-to-lock flanged inlet with integral cover

Power outlets: (1) 50A 125/250V California Standard twist-to-lock receptacle

(1) NEMA L6-30R 30A 250V twist-to-lock receptacle(6) NEMA 5-20R 20A 125V straight blade receptacles


Over-current protection: 50A receptacle - none


30A receptacle - 30A circuit breaker for each ungrounded conductor

20A receptacles - 20A circuit breaker for each receptacle

Ground fault protection: Individual Class A GFCI for each 20A receptacle

Over-voltage protection: Provided by GFCI on each 20A receptacle

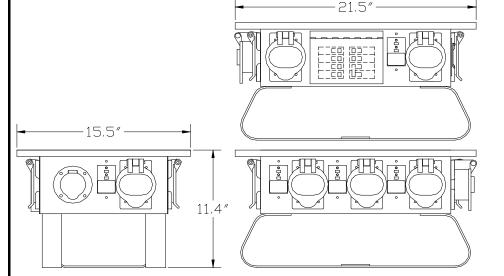



Enclosure type: NEMA Type 3R, rainproof

Enclosure material: Carbon steel, protected by e-coat and yellow exterior paint finish

Enclosure base: Carbon steel, with black powder coat finish

Receptacle covers: Thermoplastic, on all receptacles

Receptacle cover colors: Black, except for the 30A receptacle cover, which is gray

Weight (approx): 32 lbs.

The information presented here is, to the best of our knowledge, true and accurate. However, since conditions of use are beyond our control, all recommendations or suggestions are presented without guarantee or responsibility on our part. We disclaim all liability in connection with the use of information contained herein or otherwise.

This specification is the proprietary intellectual property of Coleman Cable Inc.. Any information contained herein shall not be disclosed to any party without the written consent of Coleman Cable Inc..