




## PRODUCT SPECIFICATION

**CATALOG NUMBER:** 01972-3R-02  
**PRODUCT DESCRIPTION:** Construction-site portable power distribution box  
**NRTL APPROVAL:** ETL Listed to UL 1640 and CAN/CSA C22.2 No. 14

### PRODUCT DESCRIPTION

Power inlet: 50A 125/250V California Standard twist-to-lock flanged inlet with integral cover  
Power outlets: (6) NEMA 5-20R 20A 125V straight blade receptacles  
(1) NEMA L6-30R 30A 250V twist-to-lock receptacle  
(1) 50A 125/250V California Standard twist-to-lock receptacle  
Over-current protection: 20A receptacles - 20A circuit breaker for each receptacle  
30A receptacle - 30A circuit breaker for each ungrounded conductor  
50A receptacle - none  
Ground fault protection: Individual Class A GFCI for each 20A receptacle  
Over-voltage protection: Provided by GFCI on each 20A receptacle

Enclosure type: NEMA Type 3R, rainproof  
Enclosure material: Carbon steel, with yellow exterior paint finish  
Roll cage: Carbon steel tubing, with black powder coat finish  
Receptacle covers: Thermoplastic, on all receptacles  
Receptacle cover colors: 20A & 50A - black, 30A -gray  
Weight (approx): 38 lbs.

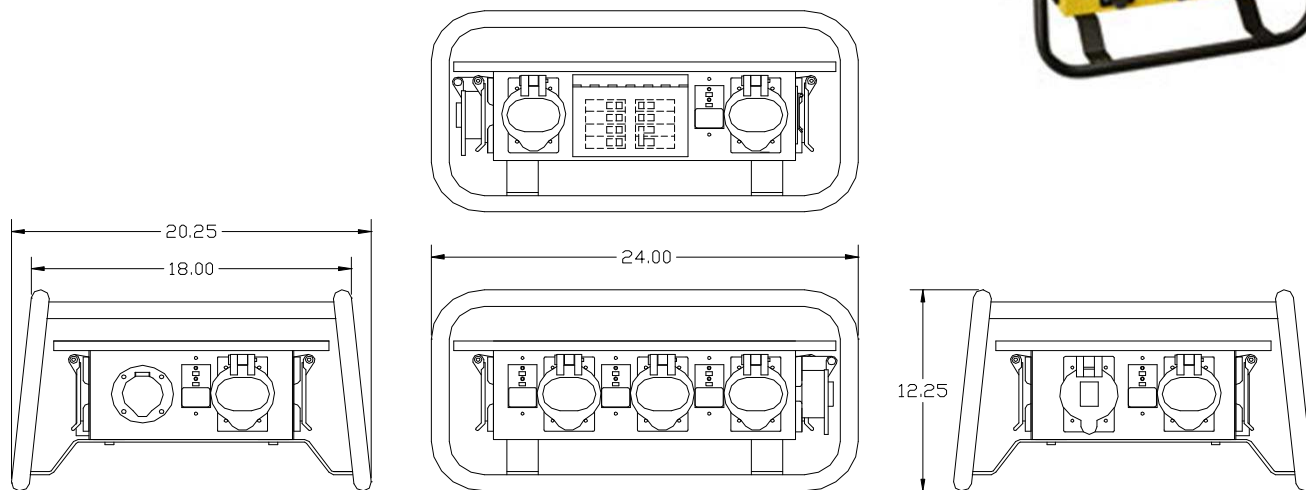

The information presented here is, to the best of our knowledge, true and accurate. However, since conditions of use are beyond our control, all recommendations or suggestions are presented without guarantee or responsibility on our part. We disclaim all liability in connection with the use of information contained herein or otherwise.

This specification is the proprietary intellectual property of Coleman Cable Inc.. Any information contained herein shall not be disclosed to any party without the written consent of Coleman Cable Inc..