



PRODUCT SPECIFICATION


CATALOG NUMBER: See table below

DESCRIPTION: Manual reset portable GFCI cord set with Tri-Source® cord connector

APPROVALS: UL Listed and CSA Certified Class A Ground Fault Circuit Interrupter; complies with OSHA requirements for personnel protection in temporary wiring installations.

CONSTRUCTION PARAMETERS:

Cable type: 12/3 SJEOW
Cable rating: Hard Usage per the National Electrical Code
Conductor: 65/30 bare copper
Jacket material: TPE, yellow
Overall cable O.D. (nom): 0.420"

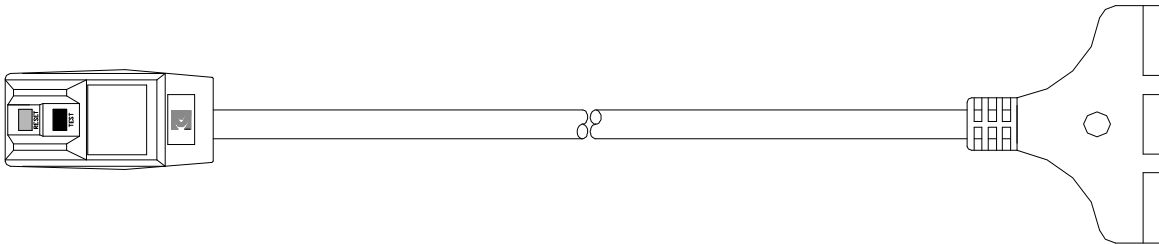

Cord length: See table below
Attachment plug configuration: Plug-in GFCI, NEMA 5-15P, yellow
Cord connector configuration: 3 x NEMA 5-15R
Cord connector material: PVC, yellow

ELECTRICAL & ENVIRONMENTAL PROPERTIES:

Operating temperature rating: -35 to +66 °C
Operating environment: Rainproof plug-in GFCI, outdoor use cord set
Nominal operating voltage: 120 VAC
Maximum operating current: 15 A
Maximum operating wattage: 1800 W

CATALOG NUMBERS

Catalog number	Length
02837	25 ft
02838	50 ft
02839	100 ft

The information presented here is, to the best of our knowledge, true and accurate. However, since conditions of use are beyond our control, all recommendations or suggestions are presented without guarantee or responsibility on our part. We disclaim all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable Inc. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable Inc.