



PRODUCT SPECIFICATION


CATALOG NUMBER: 02851

DESCRIPTION: Manual reset portable GFCI cord set with Tri-Source[®] cord connector

APPROVALS: UL Listed and CSA Certified Class A Ground Fault Circuit Interrupter; complies with OSHA requirements for personnel protection in temporary wiring installations.

CONSTRUCTION PARAMETERS:

Cable type:	12/3 SEOW
Cable rating:	Extra Hard Usage per the National Electrical Code
Conductor:	65/30 bare copper
Jacket material:	TPE, yellow
Overall cable O.D. (nom):	0.585"

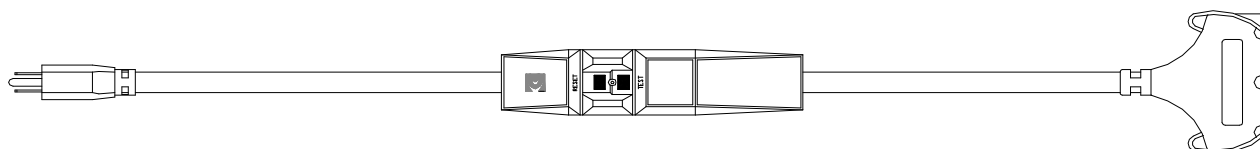

Cord length:	2.5 ft
Attachment plug configuration:	NEMA 5-15P
GFCI type:	Extra heavy duty in-line, yellow
Cord connector configuration:	3 x NEMA 5-15R, with two closure flaps
Plug and cord connector material:	PVC, clear, with a power indicator light in the cord connector

ELECTRICAL & ENVIRONMENTAL PROPERTIES:

Operating temperature rating:	-35 to +66 °C
Operating environment:	Rainproof in-line GFCI, outdoor use cord set
Nominal operating voltage:	120 VAC
Maximum operating current:	15 A
Maximum operating wattage:	1800 W

The information presented here is, to the best of our knowledge, true and accurate. However, since conditions of use are beyond our control, all recommendations or suggestions are presented without guarantee or responsibility on our part. We disclaim all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable Inc. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable Inc.