
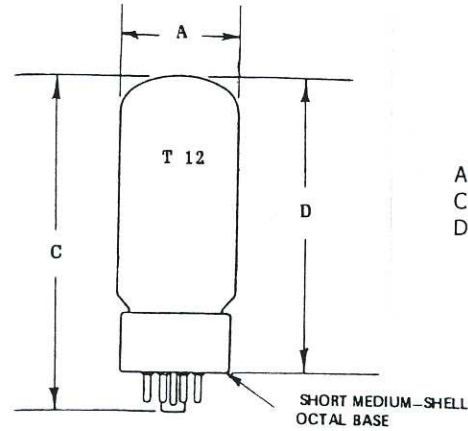


TUNG-SOL 6L6GC-STR

The 6L6GC-STR is a beam-power tetrode primarily designed for use in audio-frequency power amplifier applications. The 6L6GC-STR has ruggedized construction making it especially suitable for use in musical instrument amplifiers.



A= 1 3/8 in.
C= 3 3/4 in.
D= 3 1/4 in.

General Characteristics

	min	typ	max	
Heater Voltage (AC or DC)	5.7	6.3	6.9	V
Heater Current @ 6.3V		0.9		A
Cathode:	oxide-coated, unipotential			
Cathode-to-heater potential			±200	V
Direct interelectrode capacitances :				
Grid no. 1 to plate			0.6	pF
Grid no. 1 to cathode, heater, grid no. 2, and beam forming plates			10	pF
Plate to cathode, heater, grid no. 2, and beam forming plates			6.5	pF

Mechanical

Operating position	Any		
Base	Large wafer octal 8-pin		
Basing diagram	JEDEC 7AC		
Cooling	Radiation and convection		
Envelope temperature (max)	250 C		
Nominal dimensions:			
Diameter	38.8mm (1.528 in.)		
Base to top	93mm (3.605 in.)		
Overall height	108mm (4.252 in.)		
Diameter of base	34mm (1.339 in.)		
Net weight	65 grams		

Maximum ratings

DC plate voltage V_P	500	V
Screen grid voltage V_{g2}	500	V
Plate Dissipation	30	W
Screen Grid Dissipation	5	W

Typical Operation, Class A, Audio Power Amplifier, Single Tube Connection

	tetrode	triode	
DC plate voltage	350	250	V
Screen grid voltage	250		V
Control grid bias voltage	-18	-20	V
Peak AF grid voltage	18	20	V
Zero-signal plate current	54	40	mA
Maximum-signal plate current	66	44	mA
Zero-signal screen grid current	2.5		mA
Maximum-signal screen current	7		mA
Plate resistance (approx)	33000	1700	ohms
Transconductance (approx)	5200	4700	μS
Load Resistance	4200	5000	ohms
Total harmonic distortion	15	5	%
Maximum signal power output	10.8	1.4	W

Typical Operation, Class AB₁, Audio Power Amplifier (Values for two tubes)

DC plate voltage	450	V
Screen grid voltage	400	V
Control grid bias voltage	-37	V
Peak AF grid-to-grid voltage	70	V
Zero-signal plate current	116	mA
Maximum-signal plate current	210	mA
Zero-signal screen grid current	5.6	mA
Maximum-signal screen current	22	mA
Load Resistance, plate-to-plate	5600	ohms
Total harmonic distortion	1.8	%
Maximum signal power output	55	W

NEW SENSOR CORPORATION
32-33 47TH AVE. LONG ISLAND CITY, NY 11101
PHONE: (718) 937-8300, (800) 633-5477
FAX: (718) 937-9111