

T330/E330 SERIES




QTI's T330/E330 Series of miniature temperature sensors features a small tip diameter of 0.037 inches and several standard lead length options. The chip thermistor is encapsulated in a polyimide tube, which acts as a dielectric barrier.



ENGINEERING INFORMATION

- Typical diameter: 0.037 inches
- Leads: solid copper, polyurethane insulation
- Material: epoxy, polyimide
- Typical wire size: #32 AWG
- Typical operating temperature range: 0°C to 70°C
- Typical Dissipation Constant: 1mW/°C in still air*
- Typical Time Constant: 4 seconds in still air*
- E330 sensors RoHS compliant
- Available in point-matched and interchangeable tolerances

* Depends on mounting

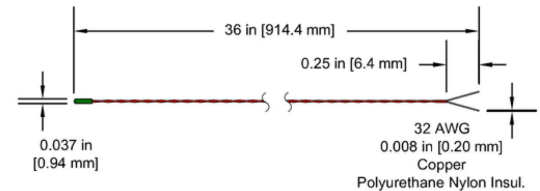

STANDARD R/T CURVES AND VALUES

Resistances at 25°C (ohms)

2252, 10k

Curves

Z/D

Tolerances (+/-)

0.1°C (0°C to 70°C), 0.2°C (0°C to 70°C), 0.5°C (0°C to 70°C), 1.0°C (0°C to 70°C)

Additional resistance, curve or tolerance options may be available. Please contact QTI for these and other customization options.

QTI can customize this part for you. Contact us for available options.

2108 Century Way Boise, Idaho 83709 USA
T: (208) 377-3373, 800-554-4784
F: (208) 376-4754
qtisales@thermistor.com
www.thermistor.com

