



## Features

- Support CPRI application update to 6.144G
- Up to 2km transmission on SMF
- 1310nm FP laser and PIN receiver
- SFI high speed electrical interface
- 2-wire interface with integrated Digital Diagnostic monitoring
- SFP+ MSA package with duplex LC connector
- Single +3.3V power supply
- Power consumption less than 1 W
- Operating case temperature: -40~+85°C

## Regulatory Compliance

Table 1 - Regulatory Compliance

| Feature   | Standard   | Performance  |
|---|--|--|
| Electrostatic Discharge (ESD) to the Electrical Pins      | MIL-STD-883E<br>Method 3015.7                                      | Class 1(>1000V for SFI pins, >2000V for other pins.) |
| Electrostatic Discharge (ESD) to the Duplex LC Receptacle | IEC 61000-4-2<br>GR-1089-CORE                                      | Compatible with standards                            |
| Electromagnetic Interference (EMI)                        | FCC Part 15 Class B<br>EN55022 Class B (CISPR 22B)<br>VCCI Class B | Compatible with standards                            |
| Immunity  | IEC 61000-4-3  | Compatible with standards                            |
| Laser Eye Safety  | FDA 21CFR 1040.10 and 1040.11<br>EN60950, EN (IEC) 60825-1,2       | Compatible with Class I laser product.               |
| RoHS  | 2011/65/EU   | Compliant with standards                             |

## Absolute Maximum Ratings

**Table 2 - Absolute Maximum Ratings**

| Parameter                   | Symbol   | Min. | Typical | Max. | Unit | Notes |
|-----------------------------|----------|------|---------|------|------|-------|
| Storage Temperature         | $T_S$    | -40  | -       | +85  | °C   |       |
| Supply Voltage              | $V_{CC}$ | -0.5 | -       | +4.0 | V    |       |
| Operating Relative Humidity | RH       | -    | -       | +85  | %    |       |

## Recommended Operating Conditions

**Table 3 – Recommended Operating Conditions**

| Parameter                  | Symbol   | Min. | Typical | Max.  | Unit | Notes |
|----------------------------|----------|------|---------|-------|------|-------|
| Operating Case Temperature | $T_C$    | -40  | -       | +85   | °C   |       |
| Power Supply Voltage       | $V_{CC}$ | 3.14 | 3.3     | 3.46  | V    |       |
| Power Supply Current       | $I_{CC}$ | -    | -       | 300   | mA   |       |
| Power Dissipation          | $P_D$    | -    | -       | 1     | W    |       |
| Bit Rate                   | BR       | 1.25 | 6.144   | 6.25  | Gbps |       |
| Transmission Distance      | TD       | -    | -       | 2,000 | m    | 1     |

Note 1: Measured with SMF.

## Optical Characteristics

**Table 4 – Optical Characteristics**

| Transmitter                        |                                |      |         |       |      |       |
|------------------------------------|--------------------------------|------|---------|-------|------|-------|
| Parameter                          | Symbol                         | Min. | Typical | Max.  | Unit | Notes |
| Center Wavelength Range            | $\lambda_C$                    | 1260 | -       | 1360  | nm   |       |
| Average Output Power               | $P_{OUT}$                      | -8.4 | -       | 0.5   | dBm  | 1     |
| Average Output Power (Laser Off)   | $P_{OUT-OFF}$                  | -    | -       | -30   | dBm  | 1     |
| Extinction Ratio                   | ER                             | 3.5  | -       | -     | dB   | 2     |
| Transmitter and Dispersion Penalty | TDP                            | -    | -       | 3.2   | dB   |       |
| Optical Eye Mask                   | Compliant with FC-PI-4 REV 7.0 |      |         |       |      | 2     |
| Receiver                           |                                |      |         |       |      |       |
| Center Wavelength Range            | $\lambda_C$                    | 1260 | -       | 1360  | nm   |       |
| Receiver Sensitivity in OMA        | $P_{IN-SENS(OMA)}$             | -    | -       | -13.8 | dBm  | 3     |
| Receiver Overload                  | $P_{IN-OL}$                    | 0.5  | -       | -     | dBm  | 3     |
| LOS Assert                         | $LOS_A$                        | -30  | -       | -     | dBm  |       |
| LOS Deassert                       | $LOS_D$                        | -    | -       | -15   | dBm  |       |
| LOS Hysteresis                     | $LOS_H$                        | 0.5  | -       | 4     | dB   |       |

|             |    |    |  |  |    |  |
|-------------|----|----|--|--|----|--|
| Return Loss | RL | 12 |  |  | dB |  |
|-------------|----|----|--|--|----|--|

Notes:

1. The optical power is launched into SMF.
2. Measured with a PRBS  $2^7-1$  test pattern @6.144Gbps.
3. Measured with a PRBS  $2^7-1$  test pattern @6.144Gbps,  $BER \leq 10^{-12}$ .

## Electrical Characteristics

**Table 5 – Electrical Characteristics**

| Transmitter                        |                   |          |         |      |                |       |  |
|------------------------------------|-------------------|----------|---------|------|----------------|-------|--|
| Parameter                          | Symbol            | Min.     | Typical | Max. | Unit           | Notes |  |
| Differential Data Input Amplitude  | $V_{IN,P-P}$      | 180      | -       | 700  | mVpp           |       |  |
| Input Differential Impedance       | $Z_{IN}$          | 85       | 100     | 115  | $\Omega$       |       |  |
| Tx_Fault                           | Normal Operation  | $V_{OL}$ | -0.3    | -    | 0.4            | V     |  |
|                                    | Transmitter Fault | $V_{OH}$ | 2.4     | -    | $V_{CC\_Host}$ | V     |  |
| Tx_Disable                         | Normal Operation  | $V_{IL}$ | -0.3    | -    | 0.8            | V     |  |
|                                    | Laser Disable     | $V_{IH}$ | 2.0     | -    | $V_{CC}+0.3$   | V     |  |
| Receiver                           |                   |          |         |      |                |       |  |
| Differential Data Output Amplitude | $V_{OUT,P-P}$     | 300      | -       | 850  | mVpp           |       |  |
| Output Differential Impedance      | $Z_O$             | 80       | 100     | 120  | $\Omega$       |       |  |
| Rx_LOS                             | Normal Operation  | $V_{OL}$ | -0.3    | -    | 0.4            | V     |  |
|                                    | Lose Signal       | $V_{OH}$ | 2.4     | -    | $V_{CC\_Host}$ | V     |  |

## Recommended Host Board Power Supply Circuit

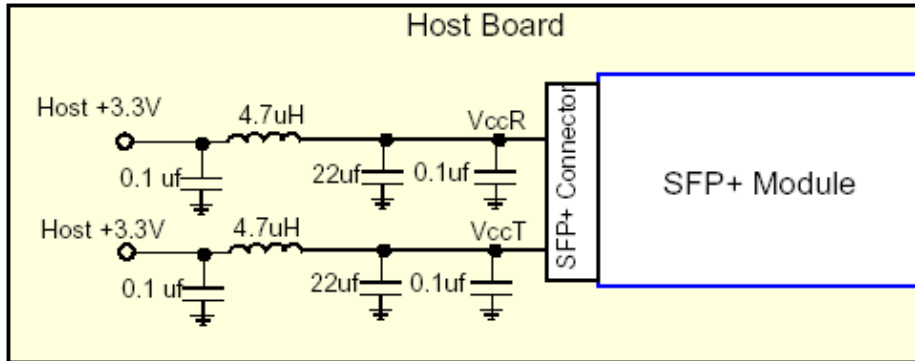


Figure 1, Recommended Host Board Power Supply Circuit

## Recommended Interface Circuit

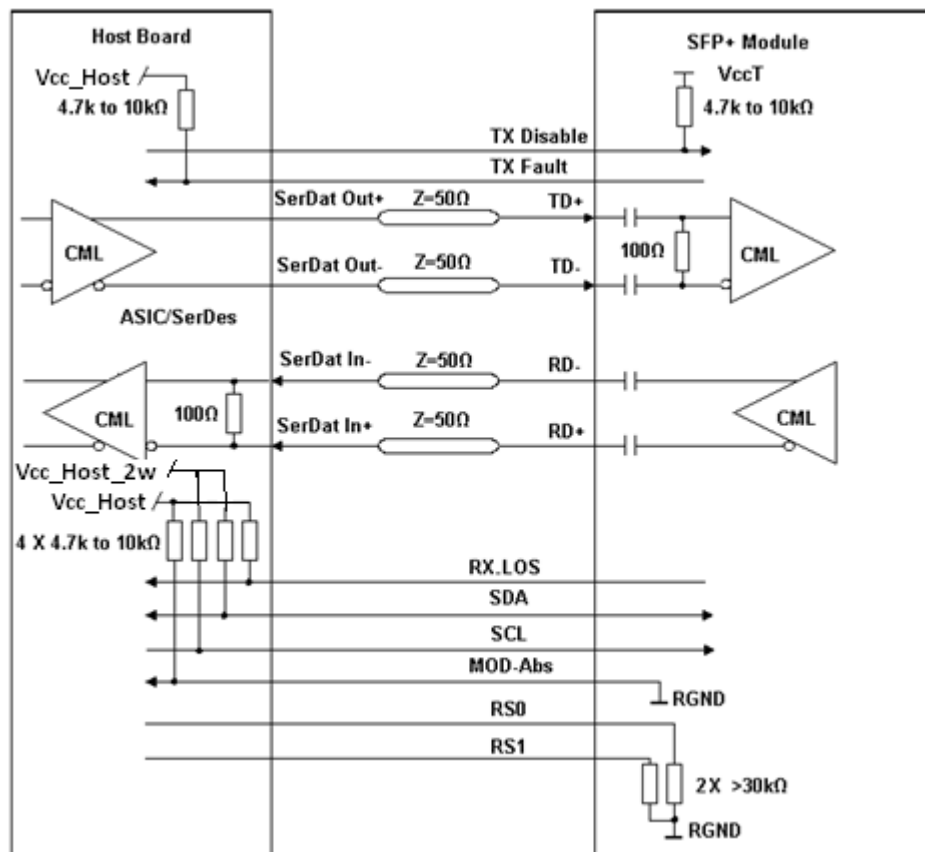


Figure 2, Recommended Interface Circuit

## Pin Definitions

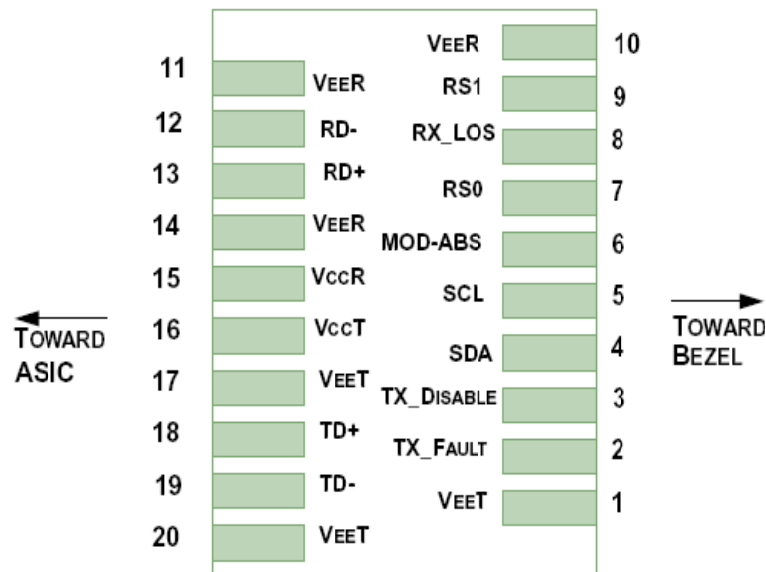


Figure 3, Pin View

Table 6–Pin Function Definitions

| Pin | Logic     | Symbol                 | Name/Description   | Note |
|-----|-----------|------------------------|--|------|
| 1   |           | $V_{EE T}$             | Module Transmitter Ground  | 1    |
| 2   | LVTTL-O   | $T X_{_F A U L T}$     | Module Transmitter Fault   | 2    |
| 3   | LVTTL-I   | $T X_{_D I S A B L E}$ | Transmitter Disable; Turns off transmitter laser output  | 3    |
| 4   | LVTTL-I/O | SDL                    | 2-Wire Serial Interface Data Line (MOD-DEF2)   |      |
| 5   | LVTTL-I/O | SCL                    | 2-Wire Serial Interface Clock (MOD-DEF1)   |      |
| 6   |           | MOD_ABS                | Module Absent, connected to $V_{EE T}$ or $V_{EE R}$ in the module   | 2    |
| 7   | LVTTL-I   | RS0                    | Rate Select 0, NOT implement   | 4    |
| 8   | LVTTL-O   | RX_LOS                 | Receiver Loss of Signal Indication (in FC designated as RX_LOS, in SONET designated as LOS, and in Ethernet designated as NOT Signal Detect) | 2    |
| 9   | LVTTL-I   | RS1                    | Rate Select 1, NOT implement   | 4    |
| 10  |           | $V_{EE R}$             | Module Receiver Ground   | 1    |
| 11  |           | $V_{EE R}$             | Module Receiver Ground   | 1    |
| 12  | CML-O     | RD-                    | Receiver Inverted Data Output  |      |
| 13  | CML-O     | RD+                    | Receiver Non-Inverted Data Output  |      |
| 14  |           | $V_{EE R}$             | Module Receiver Ground   | 1    |
| 15  |           | $V_{C C R}$            | Module Receiver 3.3 V Supply   |      |
| 16  |           | $V_{C C T}$            | Module Transmitter 3.3 V Supply  |      |
| 17  |           | $V_{EE T}$             | Module Transmitter Ground  | 1    |
| 18  | CML-I     | TD+                    | Transmitter Non-Inverted Data Input  |      |
| 19  | CML-I     | TD-                    | Transmitter Inverted Data Input  |      |
| 20  |           | $V_{EE T}$             | Module Transmitter Ground  | 1    |

**Notes:**

1. The module ground pins are isolated from the module case.
2. The pins shall be pulled up with 4.7K-10Kohms to a voltage between 2.4V and 3.46V on host board.
3. The pin is pulled up to  $V_{CCT}$  with a 4.7K-10K $\Omega$  resistor in the module.
4. The pins are pulled low to  $V_{EET}$  with a >30k $\Omega$  resistor in the module.

## Mechanical Diagram

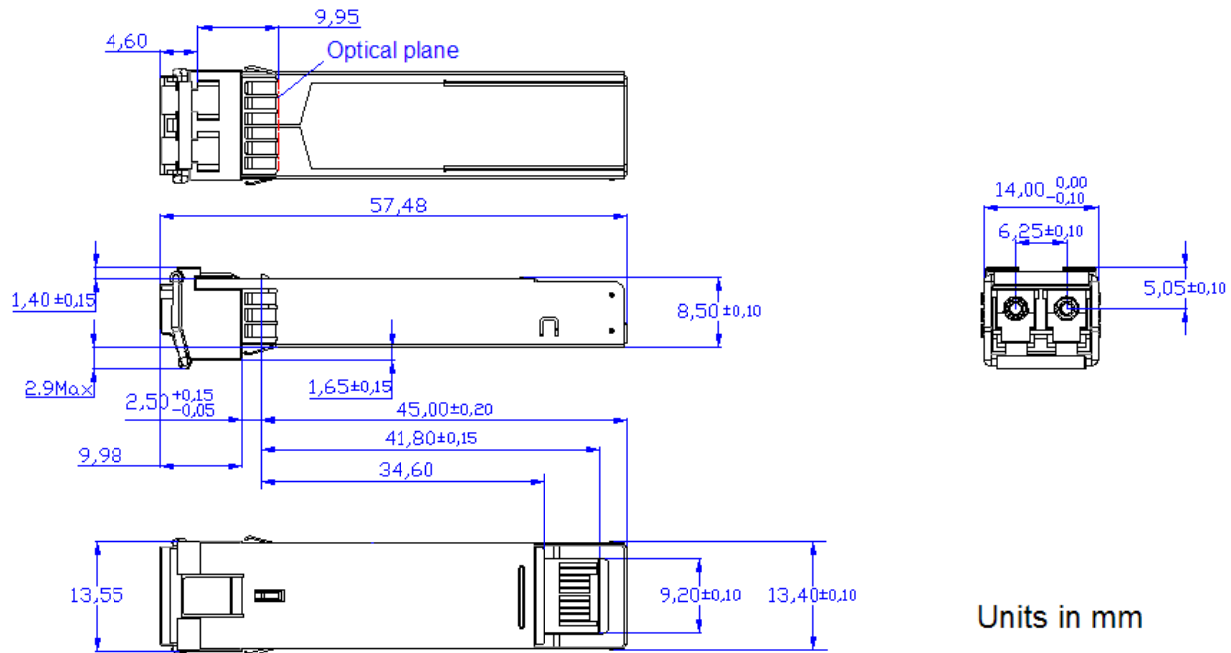


Figure 4, Mechanical Diagram of SFP+

## Order Information

Table 7 – Order Information

| Part No.       | Application | Data Rate   | Laser Source | Fiber Type |
|----------------|-------------|-------------|--------------|------------|
| SPP-8F-LR-IDFP | CPRI        | Up to 6.25G | 1310nm FP    | SMF        |

## Warnings

**Handling Precautions:** This device is susceptible to damage as a result of electrostatic discharge (ESD). A static free environment is highly recommended. Follow guidelines according to proper ESD procedures.

**Laser Safety:** Radiation emitted by laser devices can be dangerous to human eyes. Avoid eye exposure to direct or indirect radiation.

## Legal Notice

### IMPORTANT NOTICE!

All information contained in this document is subject to change without notice, at Source Photonics's sole and absolute discretion. Source Photonics warrants performance of its products to current specifications only in accordance with the company's standard one-year warranty; however, specifications designated as "preliminary" are given to describe components only, and Source Photonics expressly disclaims any and all warranties for said products, including express, implied, and statutory warranties, warranties of merchantability, fitness for a particular purpose, and non-infringement of proprietary rights. Please refer to the company's Terms and Conditions of Sale for further warranty information.

Source Photonics assumes no liability for applications assistance, customer product design, software performance, or infringement of patents, services, or intellectual property described herein. No license, either express or implied, is granted under any patent right, copyright, or intellectual property right, and Source Photonics makes no representations or warranties that the product(s) described herein are free from patent, copyright, or intellectual property rights. Products described in this document are NOT intended for use in implantation or other life support applications where malfunction may result in injury or death to persons. Source Photonics customers using or selling products for use in such applications do so at their own risk and agree to fully defend and indemnify Source Photonics for any damages resulting from such use or sale.

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROVIDED ON AN "AS IS" BASIS. Customer agrees that Source Photonics is not liable for any actual, consequential, exemplary, or other damages arising directly or indirectly from any use of the information contained in this document. Customer must contact Source Photonics to obtain the latest version of this publication to verify, before placing any order, that the information contained herein is current.

## Contact

### U.S.A. Headquarters

20550 Nordhoff Street  
Chatsworth, CA 91311  
USA  
Tel: +1-818-773-9044  
Fax: +1-818-773-0261

### China

Building #2&5, West Export Processing Zone  
No. 8 Kexin Road, Hi-Tech Zone  
Chengdu, 611731, China  
Tel: +86-28-8795-8788  
Fax: +86-28-8795-8789

### Taiwan

9F, No 81, Shui Lee Rd.  
Hsinchu, Taiwan, R.O.C.  
Tel: +886-3-5169222  
Fax: +886-3-5169213

© Copyright Source Photonics, Inc. 2008~2009

All rights reserved