




NC9BU-HM67

2nd Gen Mobile Intel® Core™ Mini-ITX
Intel® Gigabit / SATA3 RAID / USB 3.0

Features

1. Intel HM67 Express Chipset
2. 2nd-Generation Intel Core i3, i5, i7 Mobile Processors
3. SO-DIMM Dual Channel DDR3-1333 up to 16GB
4. Intel 82577LM PCI Express Gigabit LAN
5. 2 * SATA2 6Gb/s & 3 * SATA2 3Gb/s with RAID
6. 24-bit Dual Channel LVDS & Inverter
7. VGA/DVI/HDMI Video Outputs
8. PCI Express 2.0 x16, PCI Express Mini Card slots
9. 2 * USB 3.0 & 8 * USB 2.0 ports
10. All Solid Polymer Capacitors for Improved Reliability
11. Mini-ITX Form Factor

NOTE: this is a version of the NC9B motherboard without eSATA

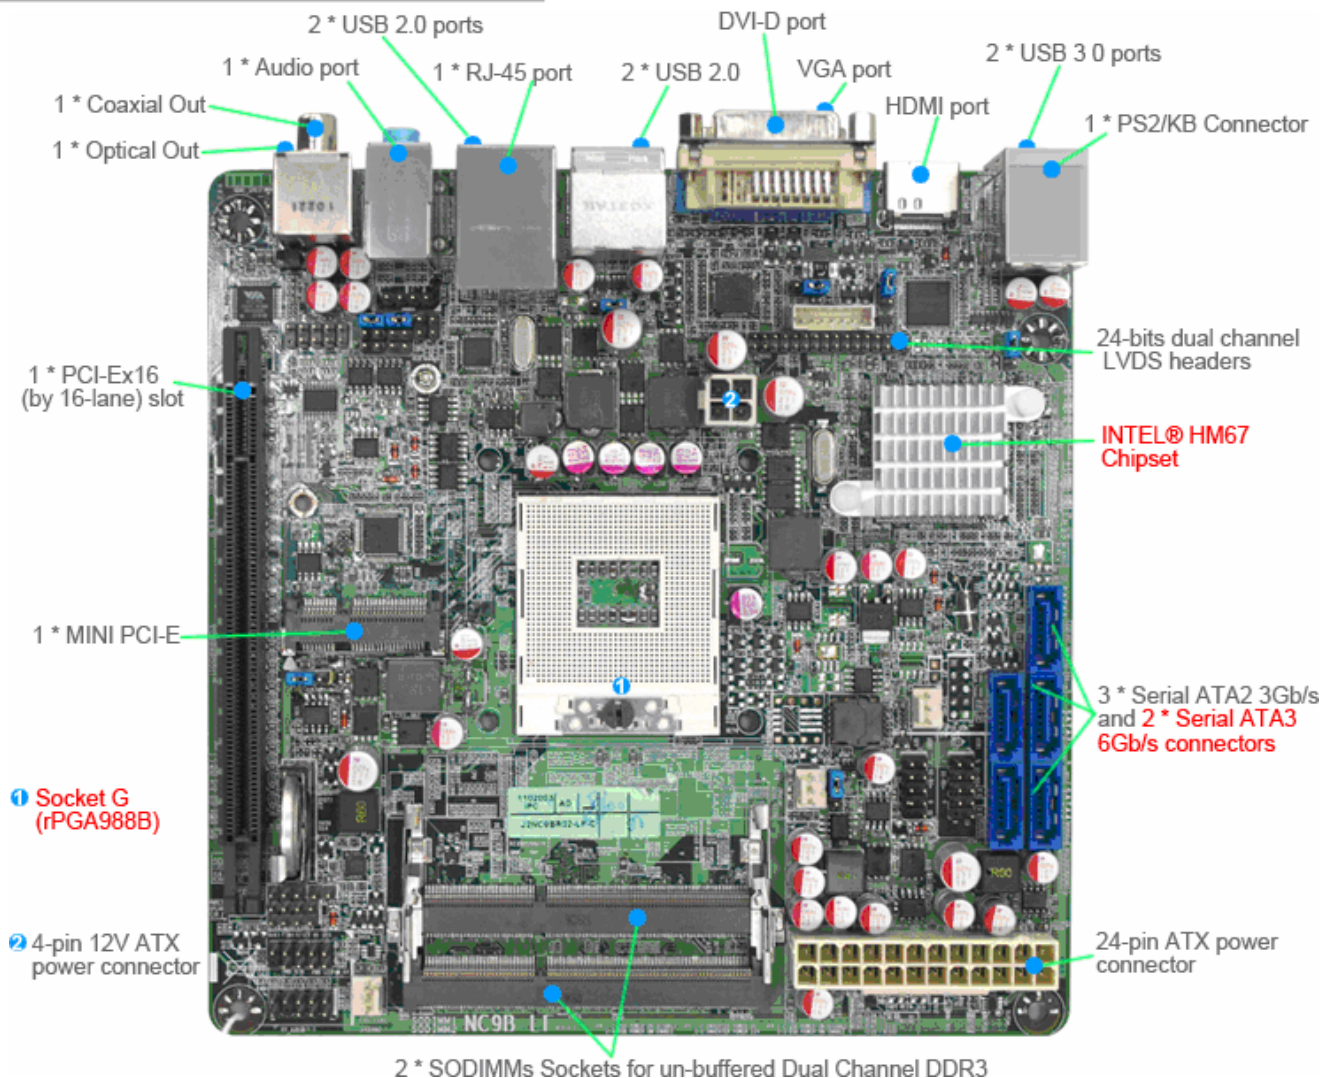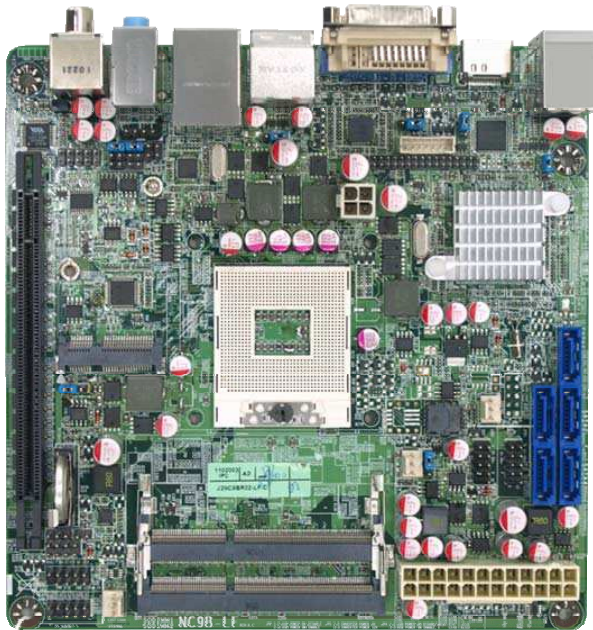



NC9BU-HM67 Specifications

Processor	<ul style="list-style-type: none"> 2nd Generation Mobile Intel Core i3, i5, i7, Pentium, Celeron Processors, G2 Socket, 35W Heatsink with Fan included
Chipset	<ul style="list-style-type: none"> Intel HM67 Express Chipset
Graphics	<ul style="list-style-type: none"> Integrated Intel HD Graphics in CPU
Memory	<ul style="list-style-type: none"> 2 * 204-pin DDR3-1066/1333 Dual Channel SO-DIMM up to 16GB
Expansion Slots	<ul style="list-style-type: none"> 1 * PCI Express 2.0 x16 Slot 1 * PCI Express Mini Card Slot
Storage	<ul style="list-style-type: none"> 2 * SATA3 6Gb/s Ports with RAID 0, 1 3 * SATA2 3Gb/s Ports with RAID 0, 1, 5, 10
Audio	<ul style="list-style-type: none"> VIA VT1705 5.1 Channel Audio, Optical & Coax S/PDIF Out
Network	<ul style="list-style-type: none"> 1 * Intel 82571LM PCI-E Gigabit LAN
Serial	<ul style="list-style-type: none"> 1 * RS232/422/485 Internal port
USB	<ul style="list-style-type: none"> 2 * USB 3.0 Ports and 8 * USB 2.0 Total
Other Features	<ul style="list-style-type: none"> Support ACPI S3, CPU Smart FAN, Watchdog Timer 10-255 min/sec
Rear Panel I/O	<ul style="list-style-type: none"> 2 * USB 3.0 Ports 1 * HDMI 1 * VGA Port 1 * DVI-D 1 * PS/2 Keyboard/Mouse Combo port 1 * RJ-45 Ports 4 * USB 2.0 Ports 1 * Optical S/PDIF Out, 1 * Coax S/PDIF Out 3 * Audio Ports (Line-in, MIC, Line-out)
Internal I/O	<ul style="list-style-type: none"> 2 * USB Headers for 4 * USB 2.0 Ports 1 * 24-bit Dual Channel LVDS Header & Inverter 1 * Serial RS232/422/485 Header 24-pin ATX Power Connector 4-pin 12V ATX Connector 1 * GPIO Front Panel Headers
BIOS	<ul style="list-style-type: none"> AMI EFI BIOS 32MB SMT Flash ROM
Box Contents	<ul style="list-style-type: none"> NC9B Motherboard, SATA Cables, Manual, DVD Driver Disk, I/O Shield
Compliance	<ul style="list-style-type: none"> CE, FCC, RoHS, ErP
Temperature	<ul style="list-style-type: none"> Operating Temperature 0~60 °C Storage Temperature -20-85 °C
Form Factor	<ul style="list-style-type: none"> Mini-ITX Form Factor (170mm x 170mm)
Warranty	<ul style="list-style-type: none"> 2 Years Limited Warranty

*This board is designed to be installed in a chassis with at least one exhaust fan.

**Specifications subject to change without notice, not responsible for typographical errors.



Jetway Computer Corporation
Phone: 510-857-0130 Fax: 510-857-0138
38507 Cherry St., Suite E, Newark, CA 94560
www.jetwaycomputer.com

