


**NC9F-H61**

1. INTEL® H61 Chipset
2. Support INTEL® LGA 1155 2nd Generation Intel® Core i7 / i5 / i3 / Pentium Processor
3. 2 \* Dual Channel SO-DIMM DDR3-1333/1066 up to 8GB
4. 19V DC-in Power-on-Board
5. Support CPU Smart FAN
6. Supports 1 \* Gigabit LAN
7. Supports ACPI S3 Function
8. Support Watch dog Technology
9. Thin Mini ITX form factor

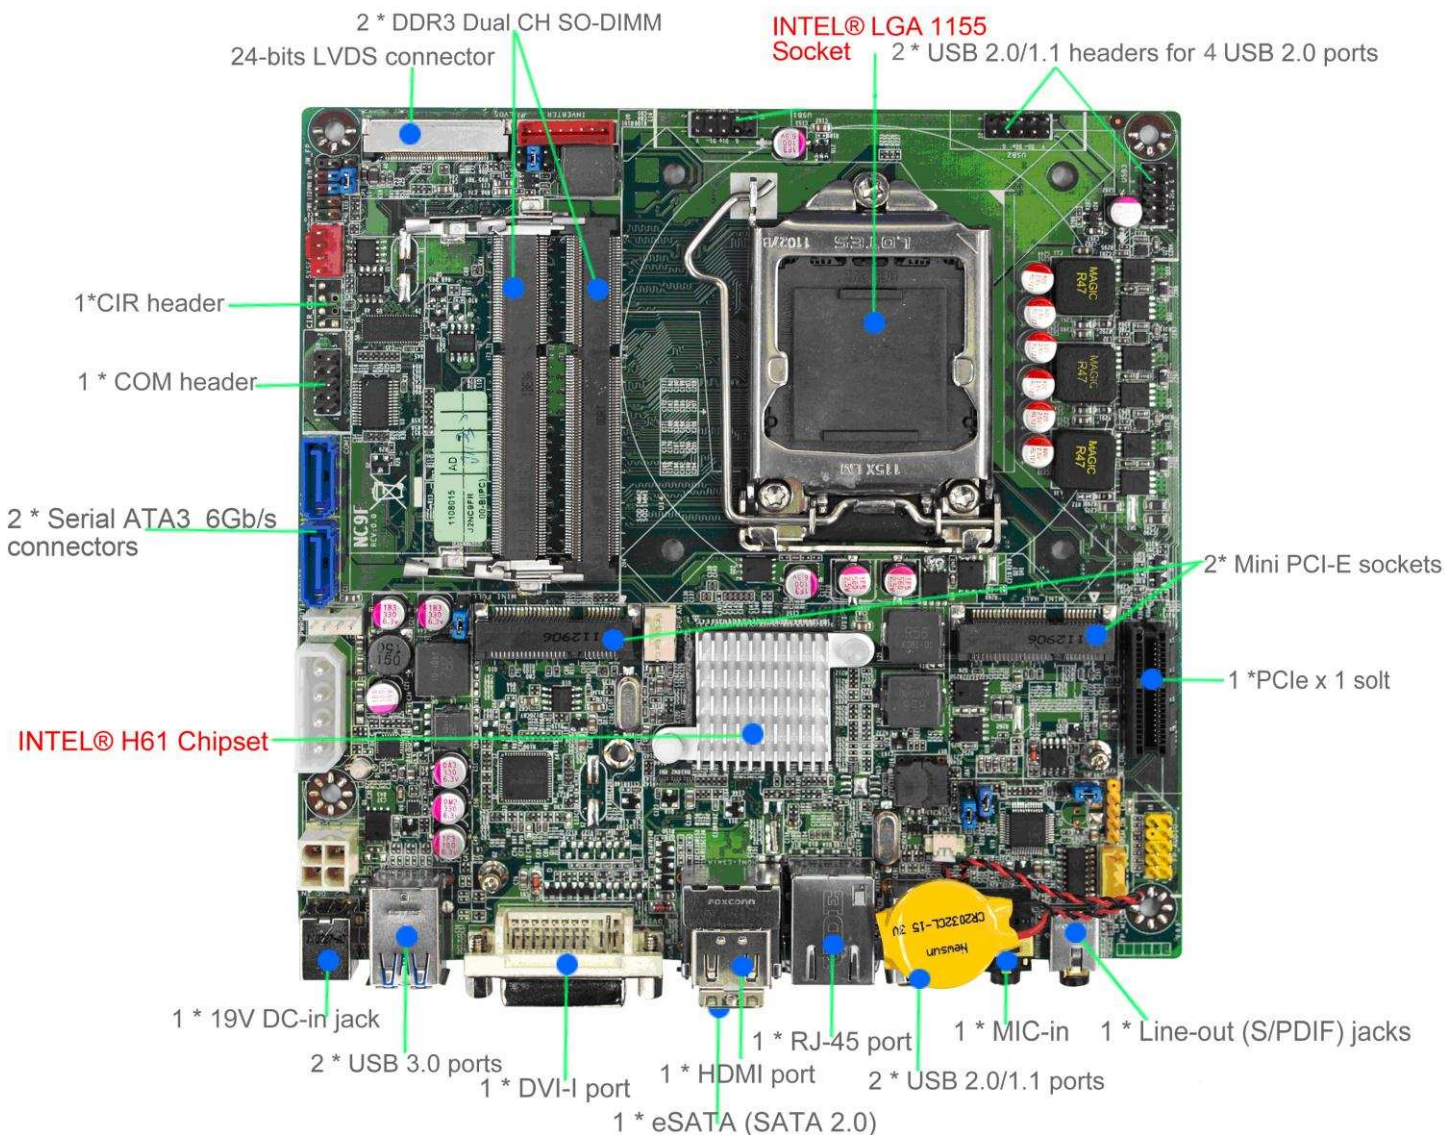

## Board Specifications

■ <b>CPU</b>	■ INTEL® LGA 1155 2nd Generation Intel® Core i7 / i5 / i3 / Pentium Processor
■ <b>Chipset</b>	■ INTEL® H61 Chipset
■ <b>Memory</b>	■ 2 * SO-DIMM Sockets Dual Channel DDR3 1066/1333 SDRAM up to 16 GB
■ <b>Expansion Slots</b>	■ 1 *PCIe x 1
■ <b>Storage</b>	■ 2 * Serial ATA2 3Gb/s connectors ■ 2 * MINI PCI-E sockets (1 for half size & 1 for full size)
■ <b>Audio</b>	■ Realtek ALC892 7.1-Channel HD Audio CODEC
■ <b>Ethernet LAN</b>	■ Realtek RTL8111EVL PCI-E Gigabit Ethernet LAN *1
■ <b>USB</b>	■ Embedded 6 * USB 2.0/1.1 & 2 * USB3.0
■ <b>Special Features</b>	■ Support ACPI S3 ■ Support CPU Smart FAN ■ Support Watch Dog
■ <b>Rear Panel I / O</b>	■ 2 * USB 2.0/1.1 ports ■ 2 * USB 3.0 ports ■ 1 * eSATA (SATA 2.0) ■ 1 * HDMI ■ 1 * 19V DC-in jack ■ 1 * RJ-45 port ■ 1 * DVI-I port ■ 1 * MIC-in & 1 * Line-out (S/PDIF) jacks
■ <b>Internal I / O</b>	■ 2 * USB 2.0/1.1 headers for 4 USB 2.0 ports ■ CPU /System Fan connectors; ■ 1 * COM header ■ 1 * eDP ■ 1 * 24-bits Dual CH LVDS & 1 * Inverter connector ■ 1 * CIR header ■ 1 * AUDIO header ■ 1 * Front panel header ■ 1 * Speaker header ■ 1 * FPD Brightness connector ■ 1 * 4-pin ATX Power connector
■ <b>BIOS</b>	■ AMI 32MB DIP Flash ROM
■ <b>Form Factor</b>	■ Thin Mini ITX Form Factor (170mm x 170mm)
■ <b>Functional</b>	■ ATM, POS, AIO, Digital Signage
■ <b>Certificate</b>	■ CE, FCC, RoHS
■ <b>Temperature</b>	■ Operating within 0~60 centigrade ■ Storage within -20-85 centigrade

\*For further information please visit the website at <http://www.jetwaycomputer.com>

\*The Specification may be changed without further notice.

## Product Accessories

