


PTH65 Series

65 Watts

Single, Dual & Triple Output Switching Power Supply

Features:

- * Small 5.00 x 3.00 x 1.34" Open Frame Package
- * Convection Cooled Operation
- * Universal AC Input (47-63 Hz)
- * 100,000 hours MTBF (25°C Full Load Operation)
- * Class B Emissions
- * Optional -40C Operating Temperature
- * International Safety Approvals & CE Mark
- * 3 Year Warranty

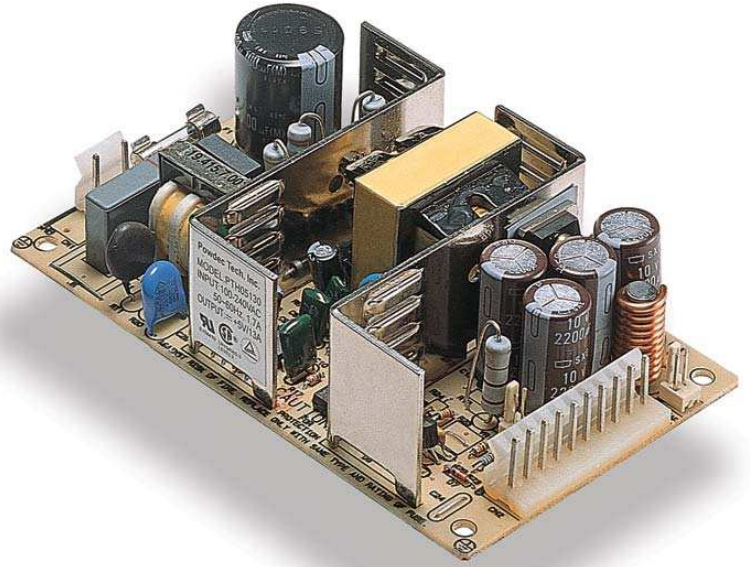

Input Specifications:

Input Range	Universal VAC (90-264 VAC) & 120-370 VDC
Input Frequency	47-63 Hz or DC
Inrush Current	25A @ 115VAC / 50A @ 230VAC max (cold start)
Input Current	1700mA @ 90 VAC / 750mA @ 200 VAC Maximum
Input Reflected Ripple	FCC 68 part 15 Class B
Efficiency	65% Typical (depending on output model)
Input Protection	Single Fused (4 Amp / 250 V)
Hold-up Time	Half Cycle Minimum @ 120 VAC and 80% load
Leakage Current	< 750µA maximum @ 264 VAC
Harmonics	EN61000-3-2 Class D

Output Specifications:

Adjustment Range	Fixed at Factory
Minimum Load	See Output Table
Regulation	V1 = 3% V2 & V3 = 10% max
Ripple / Noise	± 1% pk-pk max (20MHz)
Transient Response	+/- 5% Deviation / < 1msec recovery
Set-Point Accuracy	± 2%
Short Circuit Protection	Continuous
Over Load Protection	125-150%, automatic recovery
Over Voltage Protection	120-150%, latched shutdown

Emissions Standards

FCC Part 15J, Part 2	Within Class B Limits
EN55022 / CISPR22	Within Class B Limits

Electromagnetic Compatibility:

Electrostatic Discharge	EN61000-4-2, ± 4KV Contact / ± 8KV Air Discharge
Radiated Susceptibility	EN61000-4-3, 26-1000MHz, 10V/M, 80% AM
EFT / Bursts	EN61000-4-4, ± 2KV
Surges	EN61000-4-5, ± 2KV Line-Earth, ± 1KV Line-Line
Conducted Immunity	EN61000-4-6, 0.15 - 800MHz, 10V, 80% AM
Voltage Dips	EN61000-4-11, 95% Dip & 10ms, 30% Dip & 500ms
Voltage Interruptions	EN61000-4-11, 95% Reduction, 5s
Radiated Emissions	FCC 68 part 15 Class B
Conducted Emissions	FCC 68 part 15 Class B
Harmonic Current	EN61000-3-2 Class D
Fluctuations & Flicker	EN61000-3-3

Environmental Specifications:

Operating Temp	0 ~ 50°C (De-Rate 2.5%/1°C Rise To + 70°C)
Storage Temp	-20 ~ + 85°C
Cooling	Convection Cooled Operation
Temp Co-Efficient	0.05% per degrees celsius
Humidity	5 to 95% RH Non-Condensing
Vibration	3 Axes 1 Oct/min, 5 min at 4 Res. 0.75G Pk, 5-500Hz
Shock	20G Peak Acceleration
Reliability	> 100k hours MTBF (Full Load and 25°C Operation)

International Safety Approvals

Standards	UL1950 (2nd Edition), File # E158470
	CSA 22.2 No. 950
	TUV EN60950
	CE Mark (LVD)

PowDec
Technologies, Inc.

PowDec Technologies (Taiwan) Inc.
No. 9, Alley 9, Lane 392, Fu Teh
1st Road Hsi Chih, Taipei Hsien, Taiwan, 22150
Tel: (02) 2694-2760
Fax: (02) 2694-2753
E-mail: powdec@ms3.hinet.net
http://www.powdec.com.tw

PowDec Technologies (USA) Inc.
7013 Realm Drive, Suite E
San Jose, CA 95119 U.S.A.
Tel: (408) 362-9388
E-mail: tedkang@powdec.com
http://www.powdec.com



Output Table:

Model Number	V1	Io Min	Io Max	V2	Io Min	Io Max	V3	Io Min	Io Max
PTH05130	5VDC	1000mA	13.00A	-	-	-	-	-	-
PTH12055	12VDC	1000mA	5.50A	-	-	-	-	-	-
PTH15045	15VDC	400mA	4.50A	-	-	-	-	-	-
PTH24027	24VDC	400mA	2.70A	-	-	-	-	-	-
PTH65201	+5VDC	500mA	6.00A	+12VDC	300mA	3.60A	-	-	-
PTH65301	+5VDC	500mA	6.00A	+12VDC	300mA	2.50A	+12VDC	100mA	0.50A

Mechanical Specifications:

Construction: Open Frame

Weight: 0.641 lb / 0.290 kg.

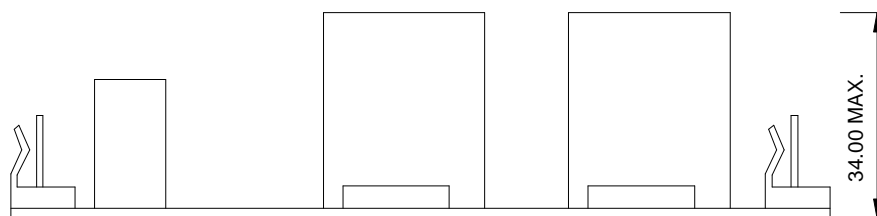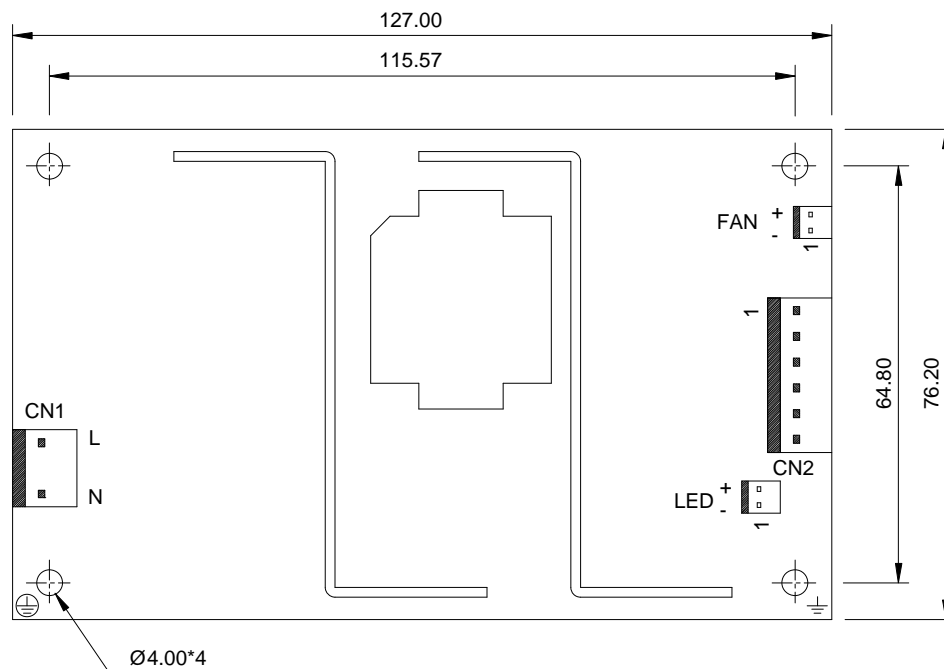

Input Pin Assignmets:

CN1-1 Line
CN1-2 Neutral

Output Pin Assignmets:

Pin	Single	Single "-6"	
		Option	Multi
CN2-1	V1	V1	V2
CN2-2	V1	V1	V1
CN2-3	V1	V1	V1
CN2-4	V1	RTN	RTN
CN2-5	RTN	RTN	RTN
CN2-6	RTN	RTN	V3 or NC
CN2-7	RTN	-	-
CN2-8	RTN	-	-

Mating Connectors:

CN1 (AC Input) Mating Connector:
Molex 09-52-4034 (5239 series)

Single Outputs:

CN2 (DC Output) Mating Connector:
Molex 09-52-4064 or equivalent

Single Outputs ("-6" Option):

CN2 (DC Output) Mating Connector:
09-52-4104 or equivalent

Multiple Outputs:

CN2 (DC Output) Mating Connector:
09-52-4104 or equivalent

FAN: Molex 22-23-2021 (6373 series)

LED: Molex 22-23-2021 (6373 series)