

24V Flexiprint

standard bright (PLCC2)

Specifications









Voltage	24V
Current	1A
Wattage	4.8W/m
Number of LED's	300pcs
Length of Stripe	5meter
Operating Temperature	-25°~+60°C
Storage Temperature	-40°~+80°C
Viewing angle	110°




Benefits

Adhesive tape on backside
RoHS compliant

Electrical and Optical Characteristics (Ta=25°C)

Part Number	Colour	Wavelength	Intensity Im (typ.)
FP1-B01D-500	 blue	472 nm	220
FP1-G01D-500	 green	525 nm	1000
FP1-H01D-500	 warmwhite	2600-2800 °K	900-1100
FP1-N01D-500	 warmwhite	3000-3500 °K	1000-1200
FP1-R01D-500	 red	639 nm	250
FP1-S01D-500	 naturalwhite	4000-5000 °K	1100-1300
FP1-W01D-500	 white	6000-7000 °K	1200-1400
FP1-Y01D-500	 yellow	590 nm	400

Dimensions

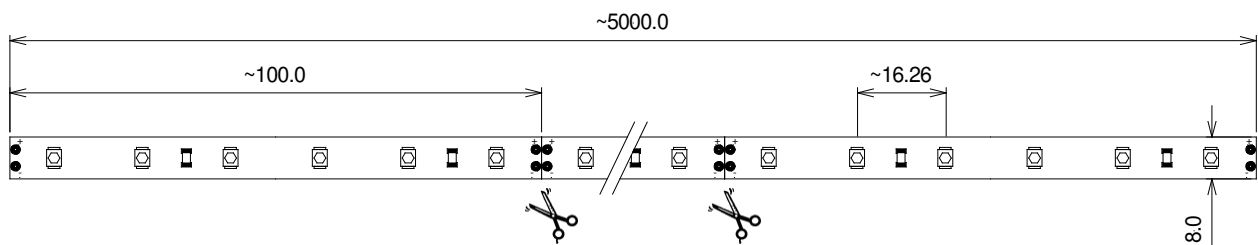

Thickness: 2.4 mm

1. All specifications according to information from our manufacturers, without additional guarantee on our part
2. All dimensions are in millimetres
3. Tolerance is ± 0.2 mm unless otherwise specified
4. Specifications are subject to change without notice