

## 12V Flexiprint Silicone IP65

high bright (PLCC6)

### Specifications









Voltage	12V
Current	3A
Wattage	14.4W/m
Number of LED's	150pcs
Length of Stripe	2.5meter
Operating Temperature	-25°~+60°C
Storage Temperature	-40°~+80°C
Viewing angle	110°

### Benefits


IP65 protection  
Adhesive tape on backside  
CE and UL compliant



### Electrical and Optical Characteristics (Ta=25°C)

Part-Number	Colour	Wavelength	Intensity Im (typ.)
FPL3-B02B-250	 blue	470 nm	600
FPL3-G02B-250	 green	520 nm	1350
FPL3-H02B-250	 warmwhite	2600-2800 °K	2200
FPL3-N02B-250	 warmwhite	3000-3500 °K	2300
FPL3-R02B-250	 red	621 nm	600
FPL3-S02B-250	 naturalwhite	4000-5000 °K	2400
FPL3-W02B-250	 white	6000-7000 °K	2500
FPL3-Y02B-250	 yellow	590 nm	1000

### Dimensions

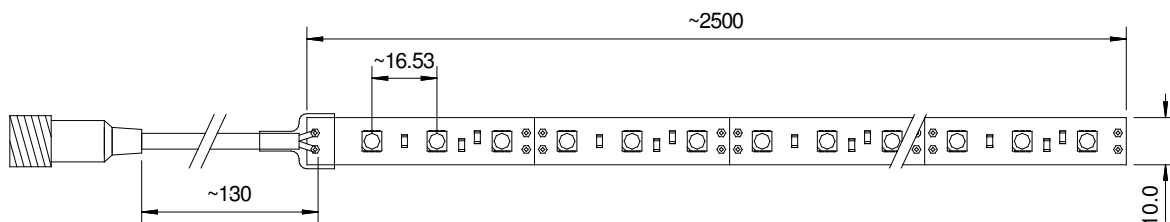

Thickness: 6.5 mm

Thickness endings: 6.7 mm

1. All specifications according to information from our manufacturers, without additional guarantee on our part
2. All dimensions are in millimetres
3. Tolerance is  $\pm 0.2$ mm unless otherwise specified
4. Specifications are subject to change without notice