

## 24V Flexiprint

Standard bright (PLCC2) high density

### Specifications




Voltage	24V
Current	1.88A
Wattage	18W/m
Number of LED's	560pcs
Length of Stripe	2.5m
Operating Temperature	-20°~+60°C
Storage Temperature	-40°~+80°C
Viewing Angle	110°
CE/UL/RoHS compliant	




### Benefits

Adhesive tape on backside

### Electrical and Optical Characteristics (Ta=25°C)

Part Number	Colour	Wavelength	Intensity lm (typ.)
FP7-N01D-250	 warm-white	3000-3500°K	3500
FP7-S01D-250	 natural-white	4000-5000°K	3750
FP7-W01D-250	 white	6000-7000°K	4000

### Dimensions

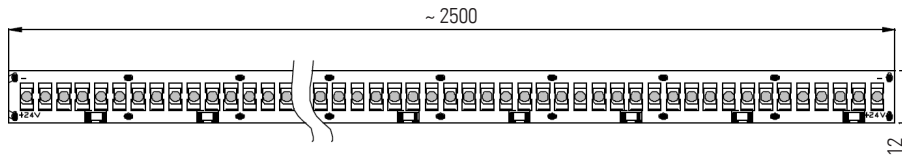

Thickness: 2.0 mm

Sloan-03-AA-E-2014\_03\_04

1. All specifications according to information from our manufacturers, without additional guarantee on our part
2. All dimensions are in millimetres
3. Tolerance is  $\pm 0.25$ mm unless otherwise specified
4. Specifications are subject to change without notice