

24V Flexiprint

RGB (PLCC6)

Specifications




| | |
|-----------------------|--------------------|
| Voltage | 24V |
| Current | 3x1A |
| Wattage | 14.4W/m (3x4.8W/m) |
| Number of LED's | 300pcs |
| Length of Stripe | 5meter |
| Operating Temperature | -25°~+60°C |
| Storage Temperature | -40°~+80°C |
| Viewing angle | 110° |




Benefits

Adhesive tape on backside
RoHS compliant

Electrical and Optical Characteristics (Ta=25°C)

| Part-Number | Colour | Wavelength | Intensity Im (Typ) |
|--------------|---|------------|--------------------|
| FP1-F02D-500 |  red | 624 nm | 550-600 |
| |  green | 518 nm | 850-900 |
| |  blue | 471 nm | 550-600 |

Dimensions

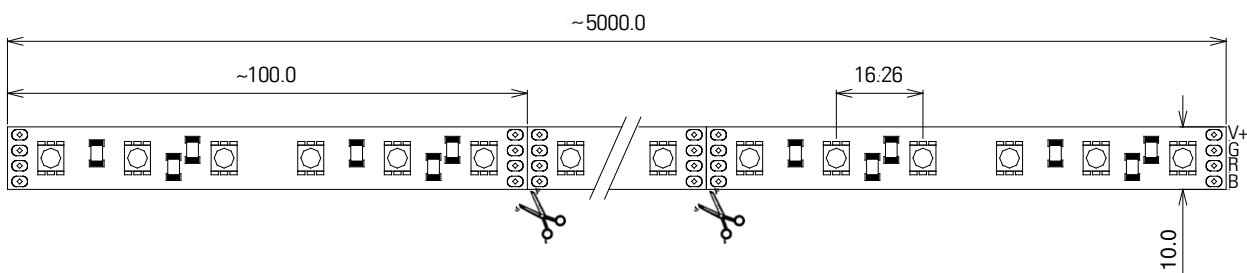

Thickness: 2.1 mm

1. All specifications according to information from our manufacturers, without additional guarantee on our part
2. All dimensions are in millimetres
3. Tolerance is ± 0.2 mm unless otherwise specified
4. Specifications are subject to change without notice