

## 12V Flexiprint Silicone IP67

RGB (PLCC6)

### Specifications




Voltage	12V
Current	3x1A
Wattage	14.4W/m (3x4.8W/m)
Number of LED's	150pcs
Length of Stripe	2.5meter
Operating Temperature	-25°~+60°C
Storage Temperature	-40°~+80°C
Viewing angle	110°




### Benefits

IP67 protection  
Adhesive tape on backside  
RoHS compliant

### Electrical and Optical Characteristics (Ta=25°C)

Part-Number	Colour	Wavelength	Intensity Im (Typ)
FPS-F02B-250	 red	624 nm	275-300
	 green	518 nm	425-450
	 blue	471 nm	275-300

### Dimensions

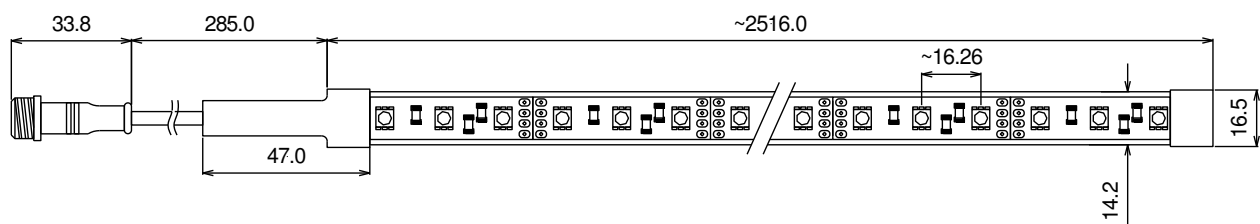

Thickness: 5.9 mm

Thickness endings: 6.8 mm

Adapter cable 250mm included

1. All specifications according to information from our manufacturers, without additional guarantee on our part
2. All dimensions are in millimetres
3. Tolerance is  $\pm 0.2$ mm unless otherwise specified
4. Specifications are subject to change without notice