

SLOAN AG  
 Birmannsgasse 8  
 CH-4009 Basel  
 Switzerland  
 Tel.: +41 (0) 61 264 10 60  
 Fax: +41 (0) 61 264 10 75  
 E-Mail: sloan@sloan-basel.com  
 www.sloan-basel.com

## Indicator lights for p.c. boards

Holder for single or in-line mounting,  
 standard grid 2.54 mm.  
 LED T1 not exchangeable.

C71





## Signalleuchten für Leiterplatten

Fassung für Einzel- oder Reihenmontage,  
 Raster 2.54 mm.  
 LED T1 nicht auswechselbar.

## Voyants lumineux pour circuits imprimés

Supports avec possibilités de montage simple  
 ou encastré en ligne, pas 2.54 mm.  
 LED T1 non remplaçable.

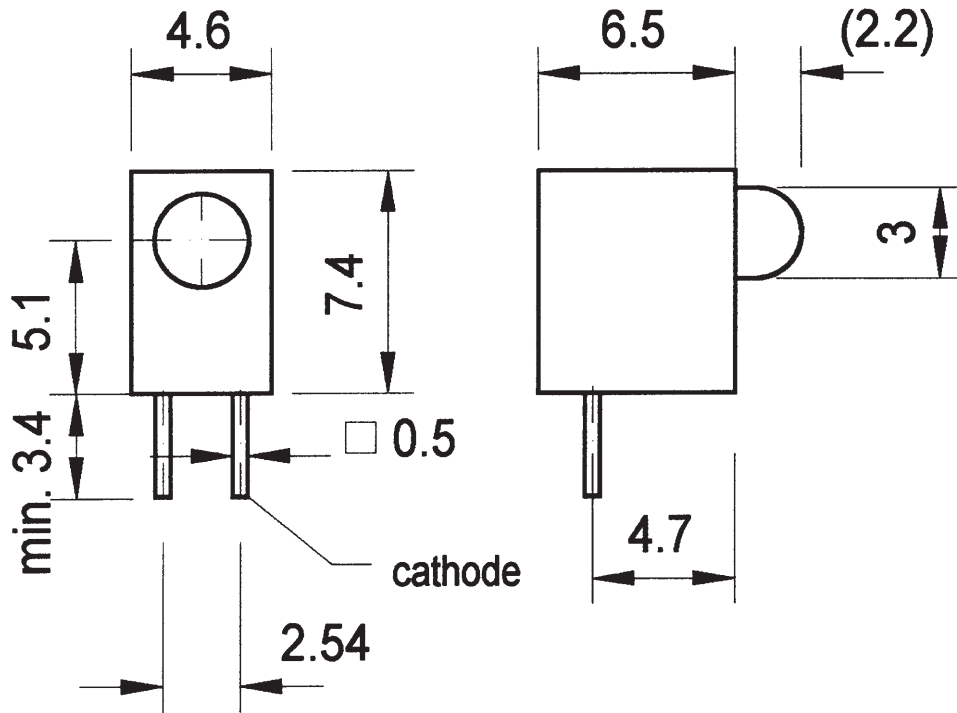

### LED Characteristics

SLOAN part no.	Chip			Absolute Maximum Ratings				Electro-optical Data			Test cond.	Viewing Angle (deg)
	Emitted Color	Peak wave length (nm)	Lens appearance	$\Delta\lambda$ (nm)	PD (mW)	IF (mA)	Peak If (mA)	VF (V)		IV Typ (mcd)		
								Typ.	Max.			
L3-Y221	yellow	585	yellow diffused	35	100	30	150	2.1	2.6	60	If (mA)	2 $\Theta$ 1/2
L3-R221	superred	635	red diffused	45	100	30	150	2.0	2.6	40		
L3-A221	superorange	610	orange diffused	35	100	30	150	2.0	2.6	70		
L3-G221	supergreen	568	green diffused	30	100	30	150	2.2	2.6	70		
L3-R211	superred	700	waterclear	90	50	15	50	2.2	2.6	60		
L3-R21B	superred	635	waterclear	45	100	30	150	2.0	2.6	100		

Order code: C71R2210, red  
 C71G2210, green  
 C71Y2210, yellow  
 C71A2210, orange

Réserve de modifications de toutes les données techniques  
 Änderungen die dem technischen Fortschritt dienen, sind vorbehalten  
 Specifications subject to change without notice