

Through-hole LED

Flashing \varnothing 3mm



- flashing frequency 2.5-1.5Hz
- power dissipation 200mW
- RoHS compliant




Part Number	Peak Wavelength	Intensity (mcd)		Angle (deg)	Voltage (V)			Current (mA)	Lens Colour
		min	max		min	typ	max		
L3-G3FF	565 nm	5.0	20.0	60°	3.5	9-12	13.0	6-70	green diffused
L3-R3FF	625 nm	12.5	32.0	60°	3.5	9-12	13.0	6-70	red diffused
L3-Y3FF	590 nm	5.0	20.0	60°	3.5	9-12	13.0	6-70	yellow diffused

Electro-Optical-Characteristics Ta=25°C, Forward Current: IF Typical = 38-56mA,

Storage Temp. -50 ~+100 (°C) Operating Temp. -40 ~+70 (°C)

Detailed data sheets are available on request

Dimensions (mm)

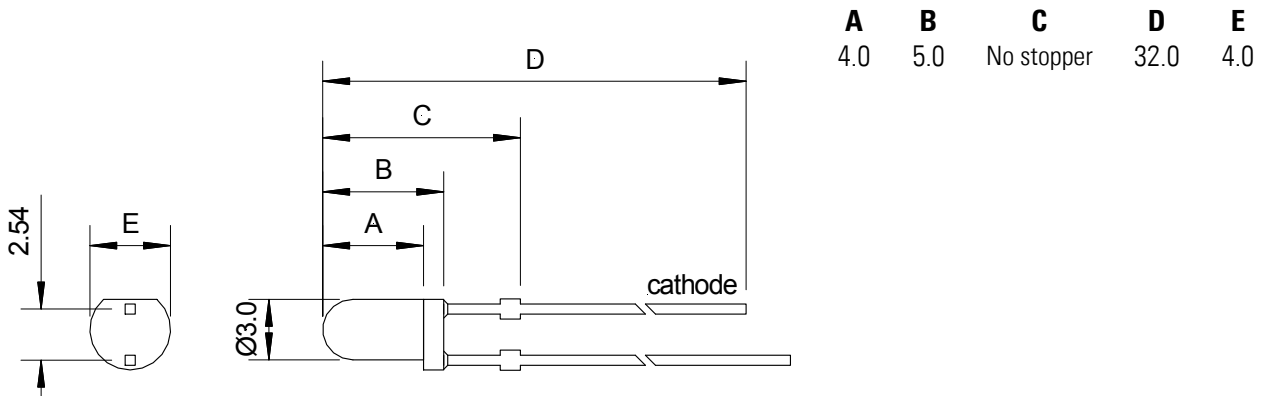

1. All specifications according to information from our manufacturers, without additional guarantee on our part
2. All dimensions are in millimetres
3. Tolerance is ± 0.25 mm unless otherwise specified
4. Specifications are subject to change without notice