

Through-hole LED

Flashing \varnothing 5mm



- flashing frequency 1.5-3Hz
- power dissipation 200mW
- RoHS compliant




Part Number	Peak Wavelength	Intensity (mcd)		Angle (deg)	Voltage (V)			Current (mA)	Lens Colour
		min	max		min	typ	max		
L5-G5FF	565 nm	5.0	32.0	60°	3.5	14	13.0	6-70	green diffused
L5-R5FF	625 nm	20.0	80.0	60°	3.5	14	13.0	6-70	red diffused
L5-Y5FF	590 nm	5.0	32.0	60°	3.5	14	13.0	6-70	yellow diffused

Electro-Optical-Characteristics $T_a=25^\circ\text{C}$, Forward Current: I_F Typical = 38-56mA,

Storage Temp. $-50 \sim +100$ (°C) Operating Temp. $-40 \sim +70$ (°C)

Detailed data sheets are available on request

Dimensions (mm)

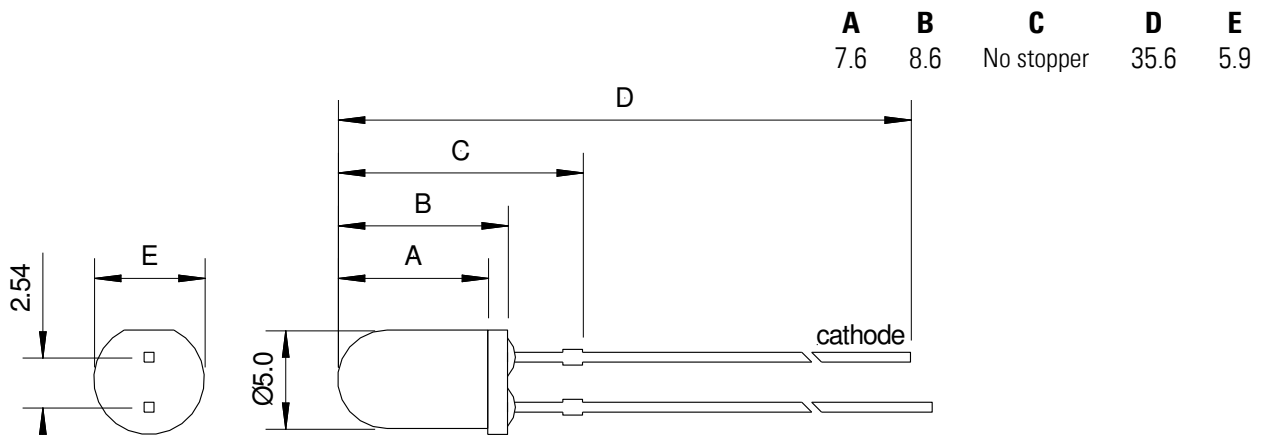

1. All specifications according to information from our manufacturers, without additional guarantee on our part
2. All dimensions are in millimetres
3. Tolerance is $\pm 0.25\text{mm}$ unless otherwise specified
4. Specifications are subject to change without notice