

CAPACITORS FOR HIGH FREQUENCY SWITCH MODE POWER SUPPLIES

TYPE DPM 907



PHYSICAL CHARACTERISTICS

CONSTRUCTION:

Dielectric: Metalized polyethylene terephthalate. Self healing, low inductance.

CASE:

Thermoplastic case. Epoxy resin molded.

LEAD MATERIAL:

DPM 907 - Termination are radial leads.

MARKING:

Dearborn trademark, type or catalog number, capacitance, tolerance and voltage.

ELECTRICAL SPECIFICATIONS

OPERATING TEMPERATURE RANGE:

-55°C to +125°C

DISSIPATION FACTOR:

Maximum 1% @ 1kHz

INSULATION RESISTANCE:

$\geq 7,500 \text{ M}\Omega$ for $C_R \leq 0.33 \mu\text{F}$

$\geq 2,500 \text{ M}\Omega \cdot \mu\text{F}$ for $C_R > 0.33 \mu\text{F}$

DIELECTRIC WITHSTANDING VOLTAGE (DWV):

1.6 x rated voltage

INSULATION BETWEEN LEADS & CASE:

50,000 $\text{M}\Omega$

PERMISSIBLE CURRENT:


@ 300kHz up to 105°C = I_{rms}

@ 300kHz at 125°C = $0.1 I_{\text{rms}}$

AVAILABLE CAPACITANCE TOLERANCES:

$\pm 20\%$ & $\pm 10\%$

DIMENSIONS (in inches)

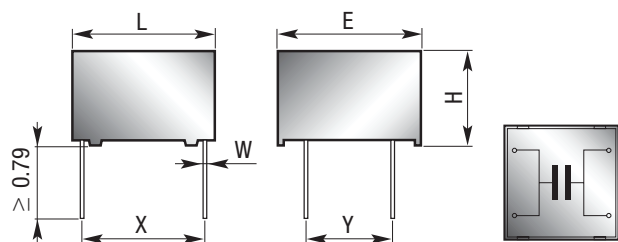

CAPACITORS FOR HIGH FREQUENCY SWITCH MODE POWER SUPPLIES

STANDARD RATINGS

Capacitance		Dimensions (in inches)						TYPE DPM 907									
μF	Code	Max. "L"	Max. "E"	Max. "H"	"X" +/- 0.02	"Y" +/- 0.02	"W" Gauge	63 V (l. rms)	100 V (l. rms)	160 V (l. rms)	250 V (l. rms)	400 V (l. rms)	500 V (l. rms)	630 V (l. rms)	800 V (l. rms)	1,000 V (l. rms)	1,250 V (l. rms)
0.22	224	0.807	0.807	0.256	0.701	0.4	18	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.9	-	-
0.27	274	0.807	0.807	0.256	0.701	0.4	18	0.9	0.9	0.9	0.9	0.9	0.9	0.9	-	-	-
0.33	334	0.807	0.807	0.256	0.701	0.4	18	1.1	1.1	1.1	1.1	1.1	1.1	1.1	-	-	-
0.39	394	0.807	0.807	0.256	0.701	0.4	18	1.1	1.1	1.1	1.1	1.1	1.1	1.3	-	-	-
0.47	474	0.807	0.807	0.256	0.701	0.4	18	1.3	1.3	1.3	1.3	1.3	1.3	-	-	-	-
0.56	564	0.807	0.807	0.256	0.701	0.4	18	1.5	1.5	1.5	1.5	1.5	1.5	-	-	-	-
0.68	684	0.807	0.807	0.256	0.701	0.4	18	1.9	1.9	1.9	1.9	1.9	1.9	-	-	-	-
0.82	824	0.807	0.807	0.256	0.701	0.4	18	2.5	2.5	2.5	2.5	2.5	-	-	-	-	-
1	105	0.807	0.807	0.256	0.701	0.4	18	3.1	3.1	3.1	3.1	3.1	-	-	-	-	-
1.5	155	0.807	0.807	0.256	0.701	0.4	18	1.5	1.5	1.5	1.5	-	-	-	-	-	-
2.2	225	0.807	0.807	0.256	0.701	0.4	18	2.2	2.2	2.2	2.2	-	-	-	-	-	-
2.7	275	0.807	0.807	0.256	0.701	0.4	18	2.4	2.4	2.4	2.4	-	-	-	-	-	-
3.3	335	0.807	0.807	0.256	0.701	0.4	18	2	2	2	-	-	-	-	-	-	-
3.9	395	0.807	0.807	0.256	0.701	0.4	18	2.5	2.5	2.5	-	-	-	-	-	-	-
4.7	475	0.807	0.807	0.256	0.701	0.4	18	2.5	2.5	3.1	-	-	-	-	-	-	-
5.6	565	0.807	0.807	0.256	0.701	0.4	18	3.2	3.2	3.2	-	-	-	-	-	-	-
6.8	685	0.807	0.807	0.256	0.701	0.4	18	4.3	4.3	4.3	-	-	-	-	-	-	-
8.2	825	0.807	0.807	0.256	0.701	0.4	18	3.2	3.2	5.2	-	-	-	-	-	-	-
10	106	0.807	0.807	0.256	0.701	0.4	18	4	-	-	-	-	-	-	-	-	-
12	126	0.807	0.807	0.256	0.701	0.4	18	5	-	-	-	-	-	-	-	-	-
0.082	823	0.807	0.807	0.315	0.701	0.4	18	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
0.1	104	0.807	0.807	0.315	0.701	0.4	18	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
0.15	154	0.807	0.807	0.315	0.701	0.4	18	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	-
0.22	224	0.807	0.807	0.315	0.701	0.4	18	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	-
0.27	274	0.807	0.807	0.315	0.701	0.4	18	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	-	-
0.33	334	0.807	0.807	0.315	0.701	0.4	18	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	-	-
0.47	474	0.807	0.807	0.315	0.701	0.4	18	1.6	1.6	1.6	1.6	1.6	1.6	1.6	-	-	-
0.56	564	0.807	0.807	0.315	0.701	0.4	18	2	2	2	2	2	2	2	-	-	-
0.82	824	0.807	0.807	0.315	0.701	0.4	18	2.3	2.3	2.3	2.3	2.3	2.3	-	-	-	-
1	105	0.807	0.807	0.315	0.701	0.4	18	2.8	2.8	2.8	2.8	2.8	2.8	-	-	-	-
1.2	125	0.807	0.807	0.315	0.701	0.4	18	3.2	3.2	3.2	3.2	3.2	-	-	-	-	-
1.5	155	0.807	0.807	0.315	0.701	0.4	18	4	4	4	4	4	-	-	-	-	-
3.3	335	0.807	0.807	0.315	0.701	0.4	18	2.6	2.6	2.6	2.6	-	-	-	-	-	-
5.6	565	0.807	0.807	0.315	0.701	0.4	18	4	4	4	-	-	-	-	-	-	-
6.8	685	0.807	0.807	0.315	0.701	0.4	18	5	5	5	-	-	-	-	-	-	-
10	106	0.807	0.807	0.315	0.701	0.4	18	6.4	6.4	-	-	-	-	-	-	-	-
15	156	0.807	0.807	0.315	0.701	0.4	18	6.3	-	-	-	-	-	-	-	-	-

RMS current rated at 300kHz up to 105°C.

CAPACITORS FOR HIGH FREQUENCY SWITCH MODE POWER SUPPLIES

TYPE DPM 907

STANDARD RATINGS

Capacitance		Dimensions (in inches)						TYPE DPM 907									
µF	Code	Max. "L"	Max. "E"	Max. "H"	"X" +/- 0.02	"Y" +/- 0.02	"W" Gauge	63 V (l. rms)	100 V (l. rms)	160 V (l. rms)	250 V (l. rms)	400 V (l. rms)	500 V (l. rms)	630 V (l. rms)	800 V (l. rms)	1,000 V (l. rms)	1,250 V (l. rms)
0.12	124	0.807	0.807	0.492	0.701	0.4	18	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8
0.15	154	0.807	0.807	0.492	0.701	0.4	18	1	1	1	1	1	1	1	1	1	1
0.18	184	0.807	0.807	0.492	0.701	0.4	18	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
0.22	224	0.807	0.807	0.492	0.701	0.4	18	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
0.27	274	0.807	0.807	0.492	0.701	0.4	18	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	-
0.33	334	0.807	0.807	0.492	0.701	0.4	18	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	-
0.39	394	0.807	0.807	0.492	0.701	0.4	18	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	2	-
0.47	474	0.807	0.807	0.492	0.701	0.4	18	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	-	-
0.56	564	0.807	0.807	0.492	0.701	0.4	18	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	-	-
0.68	684	0.807	0.807	0.492	0.701	0.4	18	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.8	-	-
0.82	824	0.807	0.807	0.492	0.701	0.4	18	3	3	3	3	3	3	3	-	-	-
1	105	0.807	0.807	0.492	0.701	0.4	18	3.2	3.2	3.2	3.2	3.2	3.2	3.2	-	-	-
1.2	125	0.807	0.807	0.492	0.701	0.4	18	3.3	3.3	3.3	3.3	3.3	3.3	-	-	-	-
1.5	155	0.807	0.807	0.492	0.701	0.4	18	4.2	4.2	4.2	4.2	4.2	4.2	-	-	-	-
1.8	185	0.807	0.807	0.492	0.701	0.4	18	4	4	4	4	4	-	-	-	-	-
2.2	225	0.807	0.807	0.492	0.701	0.4	18	4.5	4.5	4.5	4.5	4.5	-	-	-	-	-
2.7	275	0.807	0.807	0.492	0.701	0.4	18	5	5	5	5	5	-	-	-	-	-
3.9	395	0.807	0.807	0.492	0.701	0.4	18	3.1	3.1	3.1	3.1	-	-	-	-	-	-
4.7	475	0.807	0.807	0.492	0.701	0.4	18	3.7	3.7	3.7	3.7	-	-	-	-	-	-
5.6	565	0.807	0.807	0.492	0.701	0.4	18	4.4	4.4	4.4	4.4	-	-	-	-	-	-
8.2	825	0.807	0.807	0.492	0.701	0.4	18	6	6	6	-	-	-	-	-	-	-
10	106	0.807	0.807	0.492	0.701	0.4	18	7.3	7.3	7.3	-	-	-	-	-	-	-
12	126	0.807	0.807	0.492	0.701	0.4	18	6.4	6.4	-	-	-	-	-	-	-	-
15	156	0.807	0.807	0.492	0.701	0.4	18	8	8	-	-	-	-	-	-	-	-
18	186	0.807	0.807	0.492	0.701	0.4	18	7.6	8	-	-	-	-	-	-	-	-
22	226	0.807	0.807	0.492	0.701	0.4	18	8	8	-	-	-	-	-	-	-	-
0.27	274	0.807	0.807	0.788	0.701	0.4	18	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8
0.33	334	0.807	0.807	0.788	0.701	0.4	18	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2
0.39	394	0.807	0.807	0.788	0.701	0.4	18	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6
0.47	474	0.807	0.807	0.788	0.701	0.4	18	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	-
0.56	564	0.807	0.807	0.788	0.701	0.4	18	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	-
0.68	684	0.807	0.807	0.788	0.701	0.4	18	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	-
0.82	824	0.807	0.807	0.788	0.701	0.4	18	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	-	-
1	105	0.807	0.807	0.788	0.701	0.4	18	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	-	-
1.2	125	0.807	0.807	0.788	0.701	0.4	18	3.9	3.9	3.9	3.9	3.9	3.9	3.9	3.9	-	-
1.5	155	0.807	0.807	0.788	0.701	0.4	18	5	5	5	5	5	5	5	-	-	-
1.8	185	0.807	0.807	0.788	0.701	0.4	18	5	5	5	5	5	5	5.8	-	-	-
2.2	225	0.807	0.807	0.788	0.701	0.4	18	6.3	6.3	6.3	6.3	6.3	6.3	-	-	-	-
2.7	275	0.807	0.807	0.788	0.701	0.4	18	6.3	6.3	6.3	6.3	6.3	6.3	-	-	-	-
3.3	335	0.807	0.807	0.788	0.701	0.4	18	5	5	5	5	5	-	-	-	-	-
3.9	395	0.807	0.807	0.788	0.701	0.4	18	5.9	5.9	5.9	5.9	5.9	-	-	-	-	-
4.7	475	0.807	0.807	0.788	0.701	0.4	18	7.1	7.1	7.1	7.1	7.1	-	-	-	-	-
6.8	685	0.807	0.807	0.788	0.701	0.4	18	5.4	5.4	5.4	5.4	-	-	-	-	-	-
8.2	825	0.807	0.807	0.788	0.701	0.4	18	6.5	6.5	6.5	6.5	-	-	-	-	-	-
10	106	0.807	0.807	0.788	0.701	0.4	18	7.9	7.9	7.9	7.9	-	-	-	-	-	-
12	126	0.807	0.807	0.788	0.701	0.4	18	8	8	8	-	-	-	-	-	-	-
15	156	0.807	0.807	0.788	0.701	0.4	18	10	10	10	-	-	-	-	-	-	-
18	186	0.807	0.807	0.788	0.701	0.4	18	10	10	10	-	-	-	-	-	-	-
27	276	0.807	0.807	0.788	0.701	0.4	18	10	10	-	-	-	-	-	-	-	-
33	336	0.807	0.807	0.788	0.701	0.4	18	10	10	-	-	-	-	-	-	-	-
39	396	0.807	0.807	0.788	0.701	0.4	18	11.8	-	-	-	-	-	-	-	-	-

RMS current rated at 300kHz up to 105°C.

CAPACITORS FOR HIGH FREQUENCY SWITCH MODE POWER SUPPLIES

STANDARD RATINGS

Capacitance		Dimensions (in inches)						TYPE DPM 907									
μF	Code	Max. "L"	Max. "E"	Max. "H"	"X" +/- 0.02	"Y" +/- 0.02	"W" Gauge	63 V (l. rms)	100 V (l. rms)	160 V (l. rms)	250 V (l. rms)	400 V (l. rms)	500 V (l. rms)	630 V (l. rms)	800 V (l. rms)	1,000 V (l. rms)	1,250 V (l. rms)
0.47	474	0.807	0.807	1.181	0.701	0.4	18	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1
0.56	564	0.807	0.807	1.181	0.701	0.4	18	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7
0.82	824	0.807	0.807	1.181	0.701	0.4	18	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3	-
1	105	0.807	0.807	1.181	0.701	0.4	18	5.2	5.2	5.2	5.2	5.2	5.2	5.2	5.2	5.2	-
1.2	125	0.807	0.807	1.181	0.701	0.4	18	5	5	5	5	5	5	5	5	-	-
1.5	155	0.807	0.807	1.181	0.701	0.4	18	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	-	-
2.2	225	0.807	0.807	1.181	0.701	0.4	18	7.2	7.2	7.2	7.2	7.2	7.2	7.2	-	-	-
2.7	275	0.807	0.807	1.181	0.701	0.4	18	8.8	8.8	8.8	8.8	8.8	8.8	8.8	-	-	-
3.3	335	0.807	0.807	1.181	0.701	0.4	18	6.3	6.3	3.6	6.3	6.3	6.3	10.8	-	-	-
3.9	395	0.807	0.807	1.181	0.701	0.4	18	8	8	8	8	8	8	-	-	-	-
4.7	475	0.807	0.807	1.181	0.701	0.4	18	8	8	8	8	8	8	-	-	-	-
5.6	565	0.807	0.807	1.181	0.701	0.4	18	7.9	7.9	7.9	7.9	7.9	-	-	-	-	-
6.8	685	0.807	0.807	1.181	0.701	0.4	18	9.6	9.6	9.6	9.6	9.6	-	-	-	-	-
8.2	825	0.807	0.807	1.181	0.701	0.4	18	11.5	11.5	11.5	11.5	11.5	-	-	-	-	-
12	126	0.807	0.807	1.181	0.701	0.4	18	9.5	9.5	9.5	9.5	-	-	-	-	-	-
15	156	0.807	0.807	1.181	0.701	0.4	18	11.9	11.9	11.9	11.9	-	-	-	-	-	-
18	186	0.807	0.807	1.181	0.701	0.4	18	12.5	12.5	12.5	12.5	-	-	-	-	-	-
22	226	0.807	0.807	1.181	0.701	0.4	18	10	10	10	-	-	-	-	-	-	-
27	276	0.807	0.807	1.181	0.701	0.4	18	12.5	12.5	12.5	-	-	-	-	-	-	-
33	336	0.807	0.807	1.181	0.701	0.4	18	12.5	12.5	12.5	-	-	-	-	-	-	-
39	396	0.807	0.807	1.181	0.701	0.4	18	12.5	12.5	-	-	-	-	-	-	-	-
47	476	0.807	0.807	1.181	0.701	0.4	18	12.5	12.5	-	-	-	-	-	-	-	-
56	566	0.807	0.807	1.181	0.701	0.4	18	12.5	-	-	-	-	-	-	-	-	-
0.68	684	1.24	1.28	0.866	1.1	0.6	18	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4
1	105	1.24	1.28	0.866	1.1	0.6	18	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6
1.2	125	1.24	1.28	0.866	1.1	0.6	18	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	4.3
1.5	155	1.24	1.28	0.866	1.1	0.6	18	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3	5.4
1.8	185	1.24	1.28	0.866	1.1	0.6	18	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3	5.1	-
2.2	225	1.24	1.28	0.866	1.1	0.6	18	5.2	5.2	5.2	5.2	5.2	5.2	5.2	5.2	6.2	-
2.7	275	1.24	1.28	0.866	1.1	0.6	18	6.4	6.4	6.4	6.4	6.4	6.4	6.4	6.4	-	-
3.3	335	1.24	1.28	0.866	1.1	0.6	18	7.8	7.8	7.8	7.8	7.8	7.8	7.8	7.8	-	-
3.9	395	1.24	1.28	0.866	1.1	0.6	18	7	7	7	7	7	7	7	-	-	-
4.7	475	1.24	1.28	0.866	1.1	0.6	18	8.5	8.5	8.5	8.5	8.5	8.5	8.5	-	-	-
5.6	565	1.24	1.28	0.866	1.1	0.6	18	7.9	7.9	7.9	7.9	7.9	7.9	10.1	-	-	-
6.8	685	1.24	1.28	0.866	1.1	0.6	18	9.6	9.6	9.6	9.6	9.6	9.6	-	-	-	-
8.2	825	1.24	1.28	0.866	1.1	0.6	18	11.5	11.5	11.5	11.5	11.5	11.5	-	-	-	-
10	106	1.24	1.28	0.866	1.1	0.6	18	11.2	11.2	11.2	11.2	11.2	14	-	-	-	-
12	126	1.24	1.28	0.866	1.1	0.6	18	13.4	13.4	13.4	13.4	13.4	-	-	-	-	-
15	156	1.24	1.28	0.866	1.1	0.6	18	15	15	15	15	15	-	-	-	-	-
22	226	1.24	1.28	0.866	1.1	0.6	18	9.9	9.9	9.9	9.9	-	-	-	-	-	-
27	276	1.24	1.28	0.866	1.1	0.6	18	12.1	12.1	12.1	12.1	-	-	-	-	-	-
33	336	1.24	1.28	0.866	1.1	0.6	18	14.9	14.9	14.9	14.9	-	-	-	-	-	-
39	396	1.24	1.28	0.866	1.1	0.6	18	15	15	15	-	-	-	-	-	-	-
47	476	1.24	1.28	0.866	1.1	0.6	18	15	15	15	-	-	-	-	-	-	-
56	566	1.24	1.28	0.866	1.1	0.6	18	15	15	15	-	-	-	-	-	-	-
68	686	1.24	1.28	0.866	1.1	0.6	18	15	15	-	-	-	-	-	-	-	-
82	826	1.24	1.28	0.866	1.1	0.6	18	15	15	-	-	-	-	-	-	-	-
100	107	1.24	1.28	0.866	1.1	0.6	18	15	15	-	-	-	-	-	-	-	-
120	127	1.24	1.28	0.866	1.1	0.6	18	15	-	-	-	-	-	-	-	-	-

RMS current rated at 300kHz up to 105°C.

CAPACITORS FOR HIGH FREQUENCY SWITCH MODE POWER SUPPLIES

TYPE DPM 907

STANDARD RATINGS

Capacitance		Dimensions (in inches)							TYPE DPM 907									
μF	Code	Max. "L"	Max. "E"	Max. "H"	"X" +/- 0.02	"Y" +/- 0.02	"W" Gauge	63 V (l. rms)	100 V (l. rms)	160 V (l. rms)	250 V (l. rms)	400 V (l. rms)	500 V (l. rms)	630 V (l. rms)	800 V (l. rms)	1,000 V (l. rms)	1,250 V (l. rms)	
1.8	185	1.24	1.28	1.26	1.1	0.6	18	6.5	6.5	6.5	6.5	6.5	6.5	6.5	6.5	6.5	6.5	
2.2	225	1.24	1.28	1.26	1.1	0.6	18	7.9	7.9	7.9	7.9	7.9	7.9	7.9	7.9	7.9	7.9	
2.7	275	1.24	1.28	1.26	1.1	0.6	18	7.7	7.7	7.7	7.7	7.7	7.7	7.7	7.7	7.7	-	
3.3	335	1.24	1.28	1.26	1.1	0.6	18	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	-	
3.9	395	1.24	1.28	1.26	1.1	0.6	18	9.2	9.2	9.2	9.2	9.2	9.2	9.2	9.2	11	-	
4.7	475	1.24	1.28	1.26	1.1	0.6	18	11	11	11	11	11	11	11	11	-	-	
5.6	565	1.24	1.28	1.26	1.1	0.6	18	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	-	-	
6.8	685	1.24	1.28	1.26	1.1	0.6	18	12.3	12.3	12.3	12.3	12.3	12.3	12.3	-	-	-	
8.2	825	1.24	1.28	1.26	1.1	0.6	18	14.7	14.7	14.7	14.7	14.7	14.7	14.7	-	-	-	
10	106	1.24	1.28	1.26	1.1	0.6	18	15	15	15	15	15	15	15	-	-	-	
12	126	1.24	1.28	1.26	1.1	0.6	18	15	15	15	15	15	15	-	-	-	-	
15	156	1.24	1.28	1.26	1.1	0.6	18	15	15	15	15	15	15	-	-	-	-	
18	186	1.24	1.28	1.26	1.1	0.6	18	15	15	15	15	15	-	-	-	-	-	
22	226	1.24	1.28	1.26	1.1	0.6	18	15	15	15	15	15	-	-	-	-	-	
39	396	1.24	1.28	1.26	1.1	0.6	18	15	15	15	15	-	-	-	-	-	-	
47	476	1.24	1.28	1.26	1.1	0.6	18	15	15	15	15	-	-	-	-	-	-	
56	566	1.24	1.28	1.26	1.1	0.6	18	15	15	15	15	-	-	-	-	-	-	
68	686	1.24	1.28	1.26	1.1	0.6	18	15	15	15	-	-	-	-	-	-	-	
82	826	1.24	1.28	1.26	1.1	0.6	18	15	15	15	-	-	-	-	-	-	-	
100	107	1.24	1.28	1.26	1.1	0.6	18	15	15	15	-	-	-	-	-	-	-	
120	127	1.24	1.28	1.26	1.1	0.6	18	15	15	-	-	-	-	-	-	-	-	
150	157	1.24	1.28	1.26	1.1	0.6	18	150	15	-	-	-	-	-	-	-	-	
180	187	1.24	1.28	1.26	1.1	0.6	18	150	-	-	-	-	-	-	-	-	-	

RMS current rated at 300kHz up to 105°C.