

CAPACITORS FOR HIGH FREQUENCY SWITCH MODE POWER SUPPLIES

TYPE DPM 907 N



PHYSICAL CHARACTERISTICS

CONSTRUCTION:

Dielectric: Metalized polyethylene terephthalate. Self healing, low inductance.

CASE:

Thermoplastic case. Epoxy resin molded.

LEAD MATERIAL:

DPM 907 N - Termination are "DIL leads".

MARKING:

Dearborn trademark, type or catalog number, capacitance, tolerance and voltage.

ELECTRICAL SPECIFICATIONS

OPERATING TEMPERATURE RANGE:

-55°C to +125°C

DISSIPATION FACTOR:

Maximum 1% @ 1kHz

INSULATION RESISTANCE:

$\geq 7,500 \text{ M}\Omega$ for $C_r \leq 0.33 \mu\text{F}$

$\geq 2,500 \text{ M}\Omega \cdot \mu\text{F}$ for $C_r > 0.33 \mu\text{F}$

DIELECTRIC WITHSTANDING VOLTAGE (DWV):

1.6 x rated voltage

INSULATION BETWEEN LEADS & CASE:

50,000 $\text{M}\Omega$

PERMISSIBLE CURRENT:


@ 300kHz up to 105°C = I_{rms}

@ 300kHz at 125°C = $0.1 I_{\text{rms}}$

AVAILABLE CAPACITANCE TOLERANCES:

$\pm 20\%$ & $\pm 10\%$

DIMENSIONS (in inches)

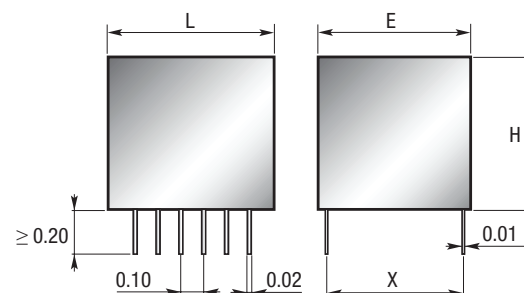

CAPACITORS FOR HIGH FREQUENCY SWITCH MODE POWER SUPPLIES

STANDARD RATINGS

Capacitance		Dimensions (in inches)					TYPE DPM 907 N										
μF	Code	Max. "L"	Max. "E"	Max. "H"	"X" + /- 0.02	Nb con \pm 0.5% / +10% -0.05	63 V (l. rms)	100 V (l. rms)	160 V (l. rms)	250 V (l. rms)	400 V (l. rms)	500 V (l. rms)	630 V (l. rms)	800 V (l. rms)	1,000 V (l. rms)	1,250 V (l. rms)	
0.22	224	0.807	0.807	0.256	0.701	0.28 x 0.08	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.9	-	-	
0.27	274	0.807	0.807	0.256	0.701	0.28 x 0.08	0.9	0.9	0.9	0.9	0.9	0.9	0.9	-	-	-	
0.33	334	0.807	0.807	0.256	0.701	0.28 x 0.08	1.1	1.1	1.1	1.1	1.1	1.1	1.1	-	-	-	
0.39	394	0.807	0.807	0.256	0.701	0.28 x 0.08	1.1	1.1	1.1	1.1	1.1	1.1	1.3	-	-	-	
0.47	474	0.807	0.807	0.256	0.701	0.28 x 0.08	1.3	1.3	1.3	1.3	1.3	1.3	-	-	-	-	
0.56	564	0.807	0.807	0.256	0.701	0.28 x 0.08	1.5	1.5	1.5	1.5	1.5	1.5	-	-	-	-	
0.68	684	0.807	0.807	0.256	0.701	0.28 x 0.08	1.9	1.9	1.9	1.9	1.9	1.9	-	-	-	-	
0.82	824	0.807	0.807	0.256	0.701	0.28 x 0.08	2.5	2.5	2.5	2.5	2.5	-	-	-	-	-	
1	105	0.807	0.807	0.256	0.701	0.28 x 0.08	3.1	3.1	3.1	3.1	3.1	-	-	-	-	-	
1.5	155	0.807	0.807	0.256	0.701	0.28 x 0.08	1.5	1.5	1.5	1.5	-	-	-	-	-	-	
2.2	225	0.807	0.807	0.256	0.701	0.28 x 0.08	2.2	2.2	2.2	2.2	-	-	-	-	-	-	
2.7	275	0.807	0.807	0.256	0.701	0.28 x 0.08	2.4	2.4	2.4	2.4	-	-	-	-	-	-	
3.3	335	0.807	0.807	0.256	0.701	0.28 x 0.08	2	2	2	-	-	-	-	-	-	-	
3.9	395	0.807	0.807	0.256	0.701	0.28 x 0.08	2.5	2.5	2.5	-	-	-	-	-	-	-	
4.7	475	0.807	0.807	0.256	0.701	0.28 x 0.08	2.5	2.5	3.1	-	-	-	-	-	-	-	
5.6	565	0.807	0.807	0.256	0.701	0.28 x 0.08	3.2	3.2	-	-	-	-	-	-	-	-	
6.8	685	0.807	0.807	0.256	0.701	0.28 x 0.08	4.3	4.3	-	-	-	-	-	-	-	-	
8.2	825	0.807	0.807	0.256	0.701	0.28 x 0.08	3.2	5.2	-	-	-	-	-	-	-	-	
10	106	0.807	0.807	0.256	0.701	0.28 x 0.08	4	-	-	-	-	-	-	-	-	-	
12	126	0.807	0.807	0.256	0.701	0.28 x 0.08	5	-	-	-	-	-	-	-	-	-	
0.082	823	0.807	0.807	0.315	0.701	0.28 x 0.08	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	
0.1	104	0.807	0.807	0.315	0.701	0.28 x 0.08	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	
0.15	154	0.807	0.807	0.315	0.701	0.28 x 0.08	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	-	
0.22	224	0.807	0.807	0.315	0.701	0.28 x 0.08	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	-	
0.27	274	0.807	0.807	0.315	0.701	0.28 x 0.08	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	-	-	
0.33	334	0.807	0.807	0.315	0.701	0.28 x 0.08	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	-	-	
0.47	474	0.807	0.807	0.315	0.701	0.28 x 0.08	1.6	1.6	1.6	1.6	1.6	1.6	1.6	-	-	-	
0.56	564	0.807	0.807	0.315	0.701	0.28 x 0.08	2	2	2	2	2	2	2	-	-	-	
0.82	824	0.807	0.807	0.315	0.701	0.28 x 0.08	2.3	2.3	2.3	2.3	2.3	2.3	-	-	-	-	
1	105	0.807	0.807	0.315	0.701	0.28 x 0.08	2.8	2.8	2.8	2.8	2.8	2.8	-	-	-	-	
1.2	125	0.807	0.807	0.315	0.701	0.28 x 0.08	3.2	3.2	3.2	3.2	3.2	-	-	-	-	-	
1.5	155	0.807	0.807	0.315	0.701	0.28 x 0.08	4	4	4	4	4	-	-	-	-	-	
3.3	335	0.807	0.807	0.315	0.701	0.28 x 0.08	2.6	2.6	2.6	2.6	-	-	-	-	-	-	
5.6	565	0.807	0.807	0.315	0.701	0.28 x 0.08	4	4	4	-	-	-	-	-	-	-	
6.8	685	0.807	0.807	0.315	0.701	0.28 x 0.08	5	5	5	-	-	-	-	-	-	-	
10	106	0.807	0.807	0.315	0.701	0.28 x 0.08	6.4	6.4	-	-	-	-	-	-	-	-	
15	156	0.807	0.807	0.315	0.701	0.28 x 0.08	6.3	-	-	-	-	-	-	-	-	-	

RMS current rated at 300kHz up to 105°C.

CAPACITORS FOR HIGH FREQUENCY SWITCH MODE POWER SUPPLIES

TYPE DPM 907 N

STANDARD RATINGS

Capacitance		Dimensions (in inches)					TYPE DPM 907 N										
μF	Code	Max. "L"	Max. "E"	Max. "H"	"X" + /- 0.02	Nb con± 0.5% / +10% -0.05	63 V (l. rms)	100 V (l. rms)	160 V (l. rms)	250 V (l. rms)	400 V (l. rms)	500 V (l. rms)	630 V (l. rms)	800 V (l. rms)	1,000 V (l. rms)	1,250 V (l. rms)	
0.12	124	0.807	0.807	0.492	0.701	0.28 x 0.08	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
0.15	154	0.807	0.807	0.492	0.701	0.28 x 0.08	1	1	1	1	1	1	1	1	1	1	
0.18	184	0.807	0.807	0.492	0.701	0.28 x 0.08	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	
0.22	224	0.807	0.807	0.492	0.701	0.28 x 0.08	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	
0.27	274	0.807	0.807	0.492	0.701	0.28 x 0.08	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	-	
0.33	334	0.807	0.807	0.492	0.701	0.28 x 0.08	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	-	
0.39	394	0.807	0.807	0.492	0.701	0.28 x 0.08	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	2	-	
0.47	474	0.807	0.807	0.492	0.701	0.28 x 0.08	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	-	-	
0.56	564	0.807	0.807	0.492	0.701	0.28 x 0.08	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	-	-	
0.68	684	0.807	0.807	0.492	0.701	0.28 x 0.08	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.8	-	-	
0.82	824	0.807	0.807	0.492	0.701	0.28 x 0.08	3	3	3	3	3	3	3	-	-	-	
1	105	0.807	0.807	0.492	0.701	0.28 x 0.08	3.2	3.2	3.2	3.2	3.2	3.2	3.2	-	-	-	
1.2	125	0.807	0.807	0.492	0.701	0.28 x 0.08	3.3	3.3	3.3	3.3	3.3	3.3	-	-	-	-	
1.5	155	0.807	0.807	0.492	0.701	0.28 x 0.08	4.7	4.7	4.7	4.7	4.7	4.7	-	-	-	-	
1.8	185	0.807	0.807	0.492	0.701	0.28 x 0.08	4	4	4	4	4	-	-	-	-	-	
2.2	225	0.807	0.807	0.492	0.701	0.28 x 0.08	4.5	4.5	4.5	4.5	4.5	-	-	-	-	-	
2.7	275	0.807	0.807	0.492	0.701	0.28 x 0.08	5	5	5	5	5	-	-	-	-	-	
3.9	395	0.807	0.807	0.492	0.701	0.28 x 0.08	3.1	3.1	3.1	3.1	-	-	-	-	-	-	
4.7	475	0.807	0.807	0.492	0.701	0.28 x 0.08	3.7	3.7	3.7	3.7	-	-	-	-	-	-	
5.6	565	0.807	0.807	0.492	0.701	0.28 x 0.08	4.4	4.4	4.4	4.4	-	-	-	-	-	-	
8.2	825	0.807	0.807	0.492	0.701	0.28 x 0.08	6	6	6	-	-	-	-	-	-	-	
10	106	0.807	0.807	0.492	0.701	0.28 x 0.08	7.3	7.3	7.3	-	-	-	-	-	-	-	
12	126	0.807	0.807	0.492	0.701	0.28 x 0.08	6.4	6.4	-	-	-	-	-	-	-	-	
15	156	0.807	0.807	0.492	0.701	0.28 x 0.08	8	8	-	-	-	-	-	-	-	-	
18	186	0.807	0.807	0.492	0.701	0.28 x 0.08	7.6	8	-	-	-	-	-	-	-	-	
22	226	0.807	0.807	0.492	0.701	0.28 x 0.08	8	8	-	-	-	-	-	-	-	-	
0.27	274	0.807	0.807	0.788	0.701	0.28 x 0.08	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	
0.33	334	0.807	0.807	0.788	0.701	0.28 x 0.08	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	
0.39	394	0.807	0.807	0.788	0.701	0.28 x 0.08	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	
0.47	474	0.807	0.807	0.788	0.701	0.28 x 0.08	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	-	
0.56	564	0.807	0.807	0.788	0.701	0.28 x 0.08	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	-	
0.68	684	0.807	0.807	0.788	0.701	0.28 x 0.08	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	-	
0.82	82	0.807	0.807	0.788	0.701	0.28 x 0.08	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	-	-	
1	105	0.807	0.807	0.788	0.701	0.28 x 0.08	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	-	-	
1.2	125	0.807	0.807	0.788	0.701	0.28 x 0.08	3.9	3.9	3.9	3.9	3.9	3.9	3.9	-	-	-	
1.5	155	0.807	0.807	0.788	0.701	0.28 x 0.08	5	5	5	5	5	5	5	-	-	-	
1.8	185	0.807	0.807	0.788	0.701	0.28 x 0.08	5	5	5	5	5	5	5.8	-	-	-	
2.2	225	0.807	0.807	0.788	0.701	0.28 x 0.08	6.3	6.3	6.3	6.3	6.3	6.3	-	-	-	-	
2.7	275	0.807	0.807	0.788	0.701	0.28 x 0.08	6.3	6.3	6.3	6.3	6.3	6.3	-	-	-	-	
3.3	335	0.807	0.807	0.788	0.701	0.28 x 0.08	5	5	5	5	5	-	-	-	-	-	
3.9	395	0.807	0.807	0.788	0.701	0.28 x 0.08	5.9	5.9	5.9	5.9	5.9	-	-	-	-	-	
4.7	475	0.807	0.807	0.788	0.701	0.28 x 0.08	7.1	7.1	7.1	7.1	7.1	-	-	-	-	-	
6.8	685	0.807	0.807	0.788	0.701	0.28 x 0.08	5.4	5.4	5.4	5.4	-	-	-	-	-	-	
8.2	825	0.807	0.807	0.788	0.701	0.28 x 0.08	6.5	6.5	6.5	6.5	-	-	-	-	-	-	
10	106	0.807	0.807	0.788	0.701	0.28 x 0.08	7.9	7.9	7.9	7.9	-	-	-	-	-	-	
12	126	0.807	0.807	0.788	0.701	0.28 x 0.08	8	8	8	-	-	-	-	-	-	-	
15	156	0.807	0.807	0.788	0.701	0.28 x 0.08	10	10	10	-	-	-	-	-	-	-	
18	186	0.807	0.807	0.788	0.701	0.28 x 0.08	10	10	10	-	-	-	-	-	-	-	
27	276	0.807	0.807	0.788	0.701	0.28 x 0.08	10	10	-	-	-	-	-	-	-	-	
33	336	0.807	0.807	0.788	0.701	0.28 x 0.08	10	10	-	-	-	-	-	-	-	-	
39	396	0.807	0.807	0.788	0.701	0.28 x 0.08	11.8	-	-	-	-	-	-	-	-	-	

RMS current rated at 300kHz up to 105°C.

CAPACITORS FOR HIGH FREQUENCY SWITCH MODE POWER SUPPLIES

STANDARD RATINGS

Capacitance		Dimensions (in inches)					TYPE DPM 907 N										
μF	Code	Max. "L"	Max. "E"	Max. "H"	"X" + / - 0.02	Nb con \pm 0.5% / +10% -0.05	63 V (l. rms)	100 V (l. rms)	160 V (l. rms)	250 V (l. rms)	400 V (l. rms)	500 V (l. rms)	630 V (l. rms)	800 V (l. rms)	1,000 V (l. rms)	1,250 V (l. rms)	
0.47	474	0.807	0.807	1.181	0.701	0.28 x 0.08	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1	
0.56	564	0.807	0.807	1.181	0.701	0.28 x 0.08	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	
0.82	824	0.807	0.807	1.181	0.701	0.28 x 0.08	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3	-	
1	105	0.807	0.807	1.181	0.701	0.28 x 0.08	5.2	5.2	5.2	5.2	5.2	5.2	5.2	5.2	5.2	-	
1.2	125	0.807	0.807	1.181	0.701	0.28 x 0.08	5	5	5	5	5	5	5	5	-	-	
1.5	155	0.807	0.807	1.181	0.701	0.28 x 0.08	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	-	-	
2.2	225	0.807	0.807	1.181	0.701	0.28 x 0.08	7.2	7.2	7.2	7.2	7.2	7.2	7.2	-	-	-	
2.7	275	0.807	0.807	1.181	0.701	0.28 x 0.08	8.8	8.8	8.8	8.8	8.8	8.8	8.8	-	-	-	
3.3	335	0.807	0.807	1.181	0.701	0.28 x 0.08	6.3	6.3	6.3	6.3	6.3	6.3	10.8	-	-	-	
3.9	395	0.807	0.807	1.181	0.701	0.28 x 0.08	8	8	8	8	8	8	-	-	-	-	
4.7	475	0.807	0.807	1.181	0.701	0.28 x 0.08	8	8	8	8	8	8	-	-	-	-	
5.6	565	0.807	0.807	1.181	0.701	0.28 x 0.08	7.9	7.9	7.9	7.9	7.9	-	-	-	-	-	
6.8	685	0.807	0.807	1.181	0.701	0.28 x 0.08	9.6	9.6	9.6	9.6	9.6	-	-	-	-	-	
8.2	825	0.807	0.807	1.181	0.701	0.28 x 0.08	11.5	11.5	11.5	11.5	11.5	-	-	-	-	-	
12	126	0.807	0.807	1.181	0.701	0.28 x 0.08	9.5	9.5	9.5	9.5	-	-	-	-	-	-	
15	156	0.807	0.807	1.181	0.701	0.28 x 0.08	11.9	11.9	11.9	11.9	-	-	-	-	-	-	
18	186	0.807	0.807	1.181	0.701	0.28 x 0.08	12.5	12.5	12.5	12.5	-	-	-	-	-	-	
22	226	0.807	0.807	1.181	0.701	0.28 x 0.08	10	10	10	-	-	-	-	-	-	-	
27	276	0.807	0.807	1.181	0.701	0.28 x 0.08	12.5	12.5	12.5	-	-	-	-	-	-	-	
33	336	0.807	0.807	1.181	0.701	0.28 x 0.08	12.5	12.5	12.5	-	-	-	-	-	-	-	
39	396	0.807	0.807	1.181	0.701	0.28 x 0.08	12.5	12.5	-	-	-	-	-	-	-	-	
47	476	0.807	0.807	1.181	0.701	0.28 x 0.08	12.5	12.5	-	-	-	-	-	-	-	-	
56	566	0.807	0.807	1.181	0.701	0.28 x 0.08	12.5	-	-	-	-	-	-	-	-	-	
0.68	684	1.24	1.28	0.866	1.1	0.43 x 0.08	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	
1	105	1.24	1.28	0.866	1.1	0.43 x 0.08	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	
1.2	12	1.24	1.28	0.866	1.1	0.43 x 0.08	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	4.3	
1.5	155	1.24	1.28	0.866	1.1	0.43 x 0.08	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3	5.4	
1.8	185	1.24	1.28	0.866	1.1	0.43 x 0.08	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3	5.1	-	
2.2	225	1.24	1.28	0.866	1.1	0.43 x 0.08	5.2	5.2	5.2	5.2	5.2	5.2	5.2	5.2	6.2	-	
2.7	275	1.24	1.28	0.866	1.1	0.43 x 0.08	6.4	6.4	6.4	6.4	6.4	6.4	6.4	6.4	-	-	
3.3	335	1.24	1.28	0.866	1.1	0.43 x 0.08	7.8	7.8	7.8	7.8	7.8	7.8	7.8	7.8	-	-	
3.9	395	1.24	1.28	0.866	1.1	0.43 x 0.08	7	7	7	7	7	7	7	-	-	-	
4.7	475	1.24	1.28	0.866	1.1	0.43 x 0.08	8.5	8.5	8.5	8.5	8.5	8.5	8.5	-	-	-	
5.6	565	1.24	1.28	0.866	1.1	0.43 x 0.08	7.9	7.9	7.9	7.9	7.9	7.9	10.1	-	-	-	
6.8	685	1.24	1.28	0.866	1.1	0.43 x 0.08	9.6	9.6	9.6	9.6	9.6	9.6	-	-	-	-	
8.2	825	1.24	1.28	0.866	1.1	0.43 x 0.08	11.5	11.5	11.5	11.5	11.5	11.5	-	-	-	-	
10	106	1.24	1.28	0.866	1.1	0.43 x 0.08	11.2	11.2	11.2	11.2	11.2	14	-	-	-	-	
12	126	1.24	1.28	0.866	1.1	0.43 x 0.08	13.4	13.4	13.4	13.4	13.4	-	-	-	-	-	
15	156	1.24	1.28	0.866	1.1	0.43 x 0.08	15	15	15	15	15	-	-	-	-	-	
22	226	1.24	1.28	0.866	1.1	0.43 x 0.08	9.9	9.9	9.9	9.9	-	-	-	-	-	-	
27	276	1.24	1.28	0.866	1.1	0.43 x 0.08	12.1	12.1	12.1	12.1	-	-	-	-	-	-	
33	336	1.24	1.28	0.866	1.1	0.43 x 0.08	14.9	14.9	14.9	14.9	-	-	-	-	-	-	
39	396	1.24	1.28	0.866	1.1	0.43 x 0.08	15	45	15	-	-	-	-	-	-	-	
47	476	1.24	1.28	0.866	1.1	0.43 x 0.08	15	15	15	-	-	-	-	-	-	-	
56	566	1.24	1.28	0.866	1.1	0.43 x 0.08	15	15	15	-	-	-	-	-	-	-	
68	686	1.24	1.28	0.866	1.1	0.43 x 0.08	15	15	-	-	-	-	-	-	-	-	
82	826	1.24	1.28	0.866	1.1	0.43 x 0.08	15	15	-	-	-	-	-	-	-	-	
100	107	1.24	1.28	0.866	1.1	0.43 x 0.08	15	15	-	-	-	-	-	-	-	-	
120	127	1.24	1.28	0.866	1.1	0.43 x 0.08	15	-	-	-	-	-	-	-	-	-	

RMS current rated at 300kHz up to 105°C.

CAPACITORS FOR HIGH FREQUENCY SWITCH MODE POWER SUPPLIES

TYPE DPM 907 N

STANDARD RATINGS

Capacitance		Dimensions (in inches)					TYPE DPM 907 N										
μF	Code	Max. "L"	Max. "E"	Max. "H"	"X" + / - 0.02	Nb con \pm 0.5% / +10% -0.05	63 V (l. rms)	100 V (l. rms)	160 V (l. rms)	250 V (l. rms)	400 V (l. rms)	500 V (l. rms)	630 V (l. rms)	800 V (l. rms)	1,000 V (l. rms)	1,250 V (l. rms)	
1.8	185	1.24	1.28	1.26	1.1	0.43 x 0.08	6.5	6.5	6.5	6.5	6.5	6.5	6.5	6.5	6.5	6.5	
2.2	225	1.24	1.28	1.26	1.1	0.43 x 0.08	7.9	7.9	7.9	7.9	7.9	7.9	7.9	7.9	7.9	7.9	
2.7	275	1.24	1.28	1.26	1.1	0.43 x 0.08	7.7	7.7	7.7	7.7	7.7	7.7	7.7	7.7	7.7	-	
3.3	335	1.24	1.28	1.26	1.1	0.43 x 0.08	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	-	
3.9	395	1.24	1.28	1.26	1.1	0.43 x 0.08	9.2	9.2	9.2	9.2	9.2	9.2	9.2	9.2	11	-	
4.7	475	1.24	1.28	1.26	1.1	0.43 x 0.08	11	11	11	11	11	11	11	11	-	-	
5.6	565	1.24	1.28	1.26	1.1	0.43 x 0.08	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	-	-	
6.8	685	1.24	1.28	1.26	1.1	0.43 x 0.08	12.3	12.3	12.3	12.3	12.3	12.3	12.3	-	-	-	
8.2	825	1.24	1.28	1.26	1.1	0.43 x 0.08	14.7	14.7	14.7	14.7	14.7	14.7	14.7	-	-	-	
10	106	1.24	1.28	1.26	1.1	0.43 x 0.08	15	15	15	15	15	15	15	-	-	-	
12	126	1.24	1.28	1.26	1.1	0.43 x 0.08	15	15	15	15	15	-	-	-	-	-	
15	156	1.24	1.28	1.26	1.1	0.43 x 0.08	15	15	15	15	15	-	-	-	-	-	
18	186	1.24	1.28	1.26	1.1	0.43 x 0.08	15	15	15	15	15	-	-	-	-	-	
22	226	1.24	1.28	1.26	1.1	0.43 x 0.08	15	15	15	15	15	-	-	-	-	-	
39	396	1.24	1.28	1.26	1.1	0.43 x 0.08	15	15	15	15	-	-	-	-	-	-	
47	476	1.24	1.28	1.26	1.1	0.43 x 0.08	15	15	15	15	-	-	-	-	-	-	
56	566	1.24	1.28	1.26	1.1	0.43 x 0.08	15	15	15	15	-	-	-	-	-	-	
68	686	1.24	1.28	1.26	1.1	0.43 x 0.08	15	15	15	-	-	-	-	-	-	-	
82	826	1.24	1.28	1.26	1.1	0.43 x 0.08	15	15	15	-	-	-	-	-	-	-	
100	107	1.24	1.28	1.26	1.1	0.43 x 0.08	15	15	15	-	-	-	-	-	-	-	
120	127	1.24	1.28	1.26	1.1	0.43 x 0.08	15	15	-	-	-	-	-	-	-	-	
150	157	1.24	1.28	1.26	1.1	0.43 x 0.08	15	15	-	-	-	-	-	-	-	-	
180	187	1.24	1.28	1.26	1.1	0.43 x 0.08	15	-	-	-	-	-	-	-	-	-	

RMS current rated at 300kHz up to 105°C.