


# CAPACITORS FOR HIGH FREQUENCY SWITCH MODE POWER SUPPLIES

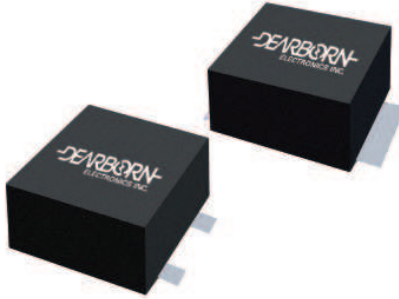

## PHYSICAL CHARACTERISTICS

### CONSTRUCTION:

Dielectric: Metalized polyethylene terephthalate. Self healing, low inductance.

### CASE:

Thermoplastic case. Epoxy resin molded.

### LEAD MATERIAL:

DPM 907 R1 & R2 - Termination are surface mount "SMD".

### MARKING:

Dearborn trademark, type or catalog number, capacitance, tolerance and voltage.

## ELECTRICAL SPECIFICATIONS

### OPERATING TEMPERATURE RANGE:

-55°C to +125°C

### DISSIPATION FACTOR:

Maximum 1% @ 1kHz

### INSULATION RESISTANCE:

$\geq 7,500 \text{ M}\Omega$  for  $C_R \leq 0.33 \mu\text{F}$   
 $\geq 2,500 \text{ M}\Omega \cdot \mu\text{F}$  for  $C_R > 0.33 \mu\text{F}$

### DIELECTRIC WITHSTANDING VOLTAGE (DWW):

1.6 x rated voltage

### INSULATION BETWEEN LEADS & CASE:

50,000  $\text{M}\Omega$

### PERMISSIBLE CURRENT:


@ 300kHz up to 105°C =  $I_{rms}$   
 @ 300kHz at 125°C =  $0.1 I_{rms}$

### AVAILABLE CAPACITANCE TOLERANCES:


$\pm 20\%$  &  $\pm 10\%$

## DIMENSIONS (in inches)

### TYPE DPM 907 R1

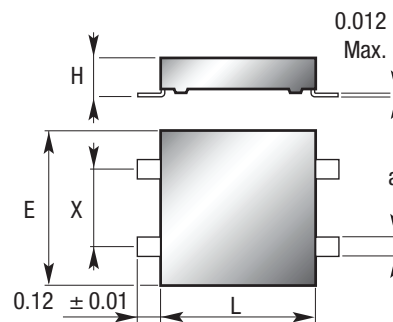

### TYPE DPM 907 R2

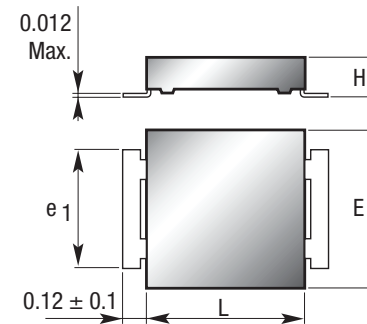

# CAPACITORS FOR HIGH FREQUENCY SWITCH MODE POWER SUPPLIES

TYPE DPM 907  
R1/R2

## STANDARD RATINGS

Capacitance		Dimensions (in inches)						TYPE DPM 907 R1 / R2									
µF	Code	Max. "L"	Max. "E"	Max. "H"	"X" +/- 0.02	"e" <sub>1</sub> " +/- 0.02	"a" <sub>1</sub> " +/- 0.002	63 V (l. rms)	100 V (l. rms)	160 V (l. rms)	250 V (l. rms)	400 V (l. rms)	500 V (l. rms)	630 V (l. rms)	800 V (l. rms)	1,000 V (l. rms)	1,250 V (l. rms)
0.22	224	0.807	0.807	0.256	0.394	0.591	0.1	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.9	-	-
0.27	274	0.807	0.807	0.256	0.394	0.591	0.1	0.9	0.9	0.9	0.9	0.9	0.9	0.9	-	-	-
0.33	334	0.807	0.807	0.256	0.394	0.591	0.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	-	-	-
0.39	394	0.807	0.807	0.256	0.394	0.591	0.1	1.1	1.1	1.1	1.1	1.1	1.1	1.3	-	-	-
0.47	474	0.807	0.807	0.256	0.394	0.591	0.1	1.3	1.3	1.3	1.3	1.3	1.3	-	-	-	-
0.56	564	0.807	0.807	0.256	0.394	0.591	0.1	1.5	1.5	1.5	1.5	1.5	1.5	-	-	-	-
0.68	684	0.807	0.807	0.256	0.394	0.591	0.1	1.9	1.9	1.9	1.9	1.9	1.9	-	-	-	-
0.82	824	0.807	0.807	0.256	0.394	0.591	0.1	2.5	2.5	2.5	2.5	2.5	-	-	-	-	-
1	105	0.807	0.807	0.256	0.394	0.591	0.1	3.1	3.1	3.1	3.1	3.1	-	-	-	-	-
1.5	155	0.807	0.807	0.256	0.394	0.591	0.1	1.5	1.5	1.5	1.5	-	-	-	-	-	-
2.2	225	0.807	0.807	0.256	0.394	0.591	0.1	2.2	2.2	2.2	2.2	-	-	-	-	-	-
2.7	275	0.807	0.807	0.256	0.394	0.591	0.1	2.4	2.4	2.4	2.4	-	-	-	-	-	-
3.3	335	0.807	0.807	0.256	0.394	0.591	0.1	2	2	2	-	-	-	-	-	-	-
3.9	395	0.807	0.807	0.256	0.394	0.591	0.1	2.5	2.5	2.5	-	-	-	-	-	-	-
4.7	475	0.807	0.807	0.256	0.394	0.591	0.1	2.5	2.5	3.1	-	-	-	-	-	-	-
5.6	565	0.807	0.807	0.256	0.394	0.591	0.1	3.2	3.2	-	-	-	-	-	-	-	-
6.8	685	0.807	0.807	0.256	0.394	0.591	0.1	4.3	4.3	-	-	-	-	-	-	-	-
8.2	825	0.807	0.807	0.256	0.394	0.591	0.1	3.2	5.2	-	-	-	-	-	-	-	-
10	106	0.807	0.807	0.256	0.394	0.591	0.1	4	-	-	-	-	-	-	-	-	-
12	126	0.807	0.807	0.256	0.394	0.591	0.1	5	-	-	-	-	-	-	-	-	-
0.082	823	0.807	0.807	0.315	0.394	0.591	0.1	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
0.1	104	0.807	0.807	0.315	0.394	0.591	0.1	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
0.15	154	0.807	0.807	0.315	0.394	0.591	0.1	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	-
0.22	224	0.807	0.807	0.315	0.394	0.591	0.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	-
0.27	274	0.807	0.807	0.315	0.394	0.591	0.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	-	-
0.33	334	0.807	0.807	0.315	0.394	0.591	0.1	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	-	-
0.47	474	0.807	0.807	0.315	0.394	0.591	0.1	1.6	1.6	1.6	1.6	1.6	1.6	1.6	-	-	-
0.56	564	0.807	0.807	0.315	0.394	0.591	0.1	2	2	2	2	2	2	2	-	-	-
0.82	824	0.807	0.807	0.315	0.394	0.591	0.1	2.3	2.3	2.3	2.3	2.3	2.3	-	-	-	-
1	105	0.807	0.807	0.315	0.394	0.591	0.1	2.8	2.8	2.8	2.8	2.8	2.8	-	-	-	-
1.2	125	0.807	0.807	0.315	0.394	0.591	0.1	3.2	3.2	3.2	3.2	3.2	-	-	-	-	-
1.5	155	0.807	0.807	0.315	0.394	0.591	0.1	4	4	4	4	4	-	-	-	-	-
3.3	335	0.807	0.807	0.315	0.394	0.591	0.1	2.6	2.6	2.6	2.6	-	-	-	-	-	-
5.6	565	0.807	0.807	0.315	0.394	0.591	0.1	4	4	4	-	-	-	-	-	-	-
6.8	685	0.807	0.807	0.315	0.394	0.591	0.1	5	5	5	-	-	-	-	-	-	-
10	106	0.807	0.807	0.315	0.394	0.591	0.1	6.4	6.4	-	-	-	-	-	-	-	-
15	156	0.807	0.807	0.315	0.394	0.591	0.1	6.3	-	-	-	-	-	-	-	-	-

RMS current rated at 300kHz up to 105°C.

# CAPACITORS FOR HIGH FREQUENCY SWITCH MODE POWER SUPPLIES

## STANDARD RATINGS

Capacitance		Dimensions (in inches)						TYPE DPM 907 R1 / R2										
μF	Code	Max. "L"	Max. "E"	Max. "H"	"X" +/- 0.02	"e" +/- 0.02	"a" +/- 0.002	63 V (l. rms)	100 V (l. rms)	160 V (l. rms)	250 V (l. rms)	400 V (l. rms)	500 V (l. rms)	630 V (l. rms)	800 V (l. rms)	1,000 V (l. rms)	1,250 V (l. rms)	
0.12	124	0.807	0.807	0.492	0.394	0.591	0.1	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
0.15	154	0.807	0.807	0.492	0.394	0.591	0.1	1	1	1	1	1	1	1	1	1	1	
0.18	184	0.807	0.807	0.492	0.394	0.591	0.1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	
0.22	224	0.807	0.807	0.492	0.394	0.591	0.1	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	
0.27	274	0.807	0.807	0.492	0.394	0.591	0.1	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	-	
0.33	334	0.807	0.807	0.492	0.394	0.591	0.1	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	-	
0.39	394	0.807	0.807	0.492	0.394	0.591	0.1	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	2	-	
0.47	474	0.807	0.807	0.492	0.394	0.591	0.1	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	-	-	
0.56	564	0.807	0.807	0.492	0.394	0.591	0.1	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	-	-	
0.68	684	0.807	0.807	0.492	0.394	0.591	0.1	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.8	-	-	
0.82	824	0.807	0.807	0.492	0.394	0.591	0.1	3	3	3	3	3	3	3	-	-	-	
1	105	0.807	0.807	0.492	0.394	0.591	0.1	3.2	3.2	3.2	3.2	3.2	3.2	3.2	-	-	-	
1.2	125	0.807	0.807	0.492	0.394	0.591	0.1	3.3	3.3	3.3	3.3	3.3	3.3	-	-	-	-	
1.5	155	0.807	0.807	0.492	0.394	0.591	0.1	4.2	4.2	4.2	4.2	4.2	4.2	-	-	-	-	
1.8	185	0.807	0.807	0.492	0.394	0.591	0.1	4	4	4	4	4	-	-	-	-	-	
2.2	225	0.807	0.807	0.492	0.394	0.591	0.1	4.5	4.5	4.5	4.5	4.5	-	-	-	-	-	
2.7	275	0.807	0.807	0.492	0.394	0.591	0.1	5	5	5	5	5	-	-	-	-	-	
3.9	395	0.807	0.807	0.492	0.394	0.591	0.1	3.1	3.1	3.1	3.1	-	-	-	-	-	-	
4.7	475	0.807	0.807	0.492	0.394	0.591	0.1	3.7	3.7	3.7	3.7	-	-	-	-	-	-	
5.6	565	0.807	0.807	0.492	0.394	0.591	0.1	4.4	4.4	4.4	4.4	-	-	-	-	-	-	
8.2	825	0.807	0.807	0.492	0.394	0.591	0.1	6	6	6	-	-	-	-	-	-	-	
10	106	0.807	0.807	0.492	0.394	0.591	0.1	7.3	7.3	7.3	-	-	-	-	-	-	-	
12	126	0.807	0.807	0.492	0.394	0.591	0.1	6.4	6.4	-	-	-	-	-	-	-	-	
15	156	0.807	0.807	0.492	0.394	0.591	0.1	8	8	-	-	-	-	-	-	-	-	
18	186	0.807	0.807	0.492	0.394	0.591	0.1	7.6	8	-	-	-	-	-	-	-	-	
22	226	0.807	0.807	0.492	0.394	0.591	0.1	8	8	-	-	-	-	-	-	-	-	
0.27	274	0.807	0.807	0.788	0.394	0.591	0.1	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	
0.33	334	0.807	0.807	0.788	0.394	0.591	0.1	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	
0.39	394	0.807	0.807	0.788	0.394	0.591	0.1	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	
0.47	474	0.807	0.807	0.788	0.394	0.591	0.1	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	-	
0.56	564	0.807	0.807	0.788	0.394	0.591	0.1	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	-	
0.68	684	0.807	0.807	0.788	0.394	0.591	0.1	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	-	
0.82	824	0.807	0.807	0.788	0.394	0.591	0.1	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	-	-	
1	105	0.807	0.807	0.788	0.394	0.591	0.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	-	-	
1.2	125	0.807	0.807	0.788	0.394	0.591	0.1	3.9	3.9	3.9	3.9	3.9	3.9	3.9	-	-	-	
1.5	155	0.807	0.807	0.788	0.394	0.591	0.1	5	5	5	5	5	5	5	-	-	-	
1.8	185	0.807	0.807	0.788	0.394	0.591	0.1	5	5	5	5	5	5	5.8	-	-	-	
2.2	225	0.807	0.807	0.788	0.394	0.591	0.1	6.3	6.3	6.3	6.3	6.3	6.3	-	-	-	-	
2.7	275	0.807	0.807	0.788	0.394	0.591	0.1	6.3	6.3	6.3	6.3	6.3	6.3	-	-	-	-	
3.3	335	0.807	0.807	0.788	0.394	0.591	0.1	5	5	5	5	5	-	-	-	-	-	
3.9	395	0.807	0.807	0.788	0.394	0.591	0.1	5.9	5.9	5.9	5.9	5.9	-	-	-	-	-	
4.7	475	0.807	0.807	0.788	0.394	0.591	0.1	7.1	7.1	7.1	7.1	7.1	-	-	-	-	-	
6.8	685	0.807	0.807	0.788	0.394	0.591	0.1	5.4	5.4	5.4	5.4	-	-	-	-	-	-	
8.2	825	0.807	0.807	0.788	0.394	0.591	0.1	6.5	6.5	6.5	6.5	-	-	-	-	-	-	
10	106	0.807	0.807	0.788	0.394	0.591	0.1	7.9	7.9	7.9	7.9	-	-	-	-	-	-	
12	126	0.807	0.807	0.788	0.394	0.591	0.1	8	8	8	-	-	-	-	-	-	-	
15	156	0.807	0.807	0.788	0.394	0.591	0.1	10	10	10	-	-	-	-	-	-	-	
18	186	0.807	0.807	0.788	0.394	0.591	0.1	10	10	10	-	-	-	-	-	-	-	
27	276	0.807	0.807	0.788	0.394	0.591	0.1	10	10	-	-	-	-	-	-	-	-	
33	336	0.807	0.807	0.788	0.394	0.591	0.1	33	10	-	-	-	-	-	-	-	-	
39	396	0.807	0.807	0.788	0.394	0.591	0.1	11.8	-	-	-	-	-	-	-	-	-	

RMS current rated at 300kHz up to 105°C.

# CAPACITORS FOR HIGH FREQUENCY SWITCH MODE POWER SUPPLIES

TYPE DPM 907  
R1/R2

## STANDARD RATINGS

Capacitance		Dimensions (in inches)						TYPE DPM 907 R1 / R2									
µF	Code	Max. "L"	Max. "E"	Max. "H"	"X" +/- 0.02	"e" <sub>1</sub> " +/- 0.02	"a" <sub>1</sub> " +/- 0.002	63 V (l. rms)	100 V (l. rms)	160 V (l. rms)	250 V (l. rms)	400 V (l. rms)	500 V (l. rms)	630 V (l. rms)	800 V (l. rms)	1,000 V (l. rms)	1,250 V (l. rms)
0.47	474	0.807	0.807	1.181	0.394	0.591	0.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1
0.56	564	0.807	0.807	1.181	0.394	0.591	0.1	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7
0.82	824	0.807	0.807	1.181	0.394	0.591	0.1	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3	-
1	105	0.807	0.807	1.181	0.394	0.591	0.1	5.2	5.2	5.2	5.2	5.2	5.2	5.2	5.2	5.2	-
1.2	125	0.807	0.807	1.181	0.394	0.591	0.1	5	5	5	5	5	5	5	5	-	-
1.5	155	0.807	0.807	1.181	0.394	0.591	0.1	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	-	-
2.2	225	0.807	0.807	1.181	0.394	0.591	0.1	7.2	7.2	7.2	7.2	7.2	7.2	7.2	-	-	-
2.7	275	0.807	0.807	1.181	0.394	0.591	0.1	8.8	8.8	8.8	8.8	8.8	8.8	8.8	-	-	-
3.3	335	0.807	0.807	1.181	0.394	0.591	0.1	6.3	6.3	6.3	6.3	6.3	6.3	10.8	-	-	-
3.9	395	0.807	0.807	1.181	0.394	0.591	0.1	8	8	8	8	8	8	-	-	-	-
4.7	455	0.807	0.807	1.181	0.394	0.591	0.1	8	8	8	8	8	8	-	-	-	-
5.6	565	0.807	0.807	1.181	0.394	0.591	0.1	7.9	7.9	7.9	7.9	7.9	-	-	-	-	-
6.8	685	0.807	0.807	1.181	0.394	0.591	0.1	9.6	9.6	9.6	9.6	9.6	-	-	-	-	-
8.2	825	0.807	0.807	1.181	0.394	0.591	0.1	11.5	11.5	11.5	11.5	11.5	-	-	-	-	-
12	126	0.807	0.807	1.181	0.394	0.591	0.1	9.5	9.5	9.5	9.5	-	-	-	-	-	-
15	156	0.807	0.807	1.181	0.394	0.591	0.1	11.9	11.9	11.9	11.9	-	-	-	-	-	-
18	186	0.807	0.807	1.181	0.394	0.591	0.1	12.5	12.5	12.5	12.5	-	-	-	-	-	-
22	226	0.807	0.807	1.181	0.394	0.591	0.1	10	10	10	-	-	-	-	-	-	-
27	276	0.807	0.807	1.181	0.394	0.591	0.1	12.5	12.5	12.5	-	-	-	-	-	-	-
33	336	0.807	0.807	1.181	0.394	0.591	0.1	12.5	12.5	12.5	-	-	-	-	-	-	-
39	396	0.807	0.807	1.181	0.394	0.591	0.1	12.5	12.5	-	-	-	-	-	-	-	-
47	476	0.807	0.807	1.181	0.394	0.591	0.1	12.5	12.5	-	-	-	-	-	-	-	-
56	566	0.807	0.807	1.181	0.394	0.591	0.1	12.5	-	-	-	-	-	-	-	-	-
0.68	684	1.24	1.28	0.866	0.945	0.945	0.158	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4
1	105	1.24	1.28	0.866	0.945	0.945	0.158	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6
1.2	12	1.24	1.28	0.866	0.945	0.945	0.158	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	4.3
1.5	155	1.24	1.28	0.866	0.945	0.945	0.158	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3	5.4
1.8	185	1.24	1.28	0.866	0.945	0.945	0.158	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3	5.1	-
2.2	225	1.24	1.28	0.866	0.945	0.945	0.158	5.2	5.2	5.2	5.2	5.2	5.2	5.2	5.2	2.2	-
2.7	275	1.24	1.28	0.866	0.945	0.945	0.158	6.4	6.4	6.4	6.4	6.4	6.4	6.4	6.4	-	-
3.3	335	1.24	1.28	0.866	0.945	0.945	0.158	7.8	7.8	7.8	7.8	7.8	7.8	7.8	7.8	-	-
3.9	395	1.24	1.28	0.866	0.945	0.945	0.158	7	7	7	7	7	7	7	-	-	-
4.7	475	1.24	1.28	0.866	0.945	0.945	0.158	8.5	8.5	8.5	8.5	8.5	8.5	-	-	-	-
5.6	565	1.24	1.28	0.866	0.945	0.945	0.158	7.9	7.9	7.9	7.9	7.9	7.9	10.1	-	-	-
6.8	685	1.24	1.28	0.866	0.945	0.945	0.158	9.6	9.6	9.6	9.6	9.6	9.6	-	-	-	-
8.2	825	1.24	1.28	0.866	0.945	0.945	0.158	11.5	11.5	11.5	11.5	11.5	11.5	-	-	-	-
10	106	1.24	1.28	0.866	0.945	0.945	0.158	11.2	11.2	11.2	11.2	11.2	14	-	-	-	-
12	126	1.24	1.28	0.866	0.945	0.945	0.158	13.4	13.4	13.4	13.4	13.4	-	-	-	-	-
15	156	1.24	1.28	0.866	0.945	0.945	0.158	15	15	15	15	15	-	-	-	-	-
22	226	1.24	1.28	0.866	0.945	0.945	0.158	9.9	9.9	9.9	9.9	-	-	-	-	-	-
27	276	1.24	1.28	0.866	0.945	0.945	0.158	12.1	12.1	12.1	12.1	-	-	-	-	-	-
33	336	1.24	1.28	0.866	0.945	0.945	0.158	14.9	14.9	14.9	14.9	-	-	-	-	-	-
39	396	1.24	1.28	0.866	0.945	0.945	0.158	15	15	15	-	-	-	-	-	-	-
47	476	1.24	1.28	0.866	0.945	0.945	0.158	15	15	15	-	-	-	-	-	-	-
56	566	1.24	1.28	0.866	0.945	0.945	0.158	15	15	15	-	-	-	-	-	-	-
68	686	1.24	1.28	0.866	0.945	0.945	0.158	15	15	-	-	-	-	-	-	-	-
82	826	1.24	1.28	0.866	0.945	0.945	0.158	15	15	-	-	-	-	-	-	-	-
100	107	1.24	1.28	0.866	0.945	0.945	0.158	15	15	-	-	-	-	-	-	-	-
120	127	1.24	1.28	0.866	0.945	0.945	0.158	15	-	-	-	-	-	-	-	-	-

RMS current rated at 300kHz up to 105°C.

# CAPACITORS FOR HIGH FREQUENCY SWITCH MODE POWER SUPPLIES

## STANDARD RATINGS

Capacitance		Dimensions (in inches)						TYPE DPM 907 R1 / R2									
μF	Code	Max. "L"	Max. "E"	Max. "H"	"X" +/- 0.02	"e <sub>1</sub> " +/- 0.02	"a" +/- 0.002	63 V (l. rms)	100 V (l. rms)	160 V (l. rms)	250 V (l. rms)	400 V (l. rms)	500 V (l. rms)	630 V (l. rms)	800 V (l. rms)	1,000 V (l. rms)	1,250 V (l. rms)
1.8	185	1.24	1.28	1.26	0.945	0.945	0.158	6.5	6.5	6.5	6.5	6.5	6.5	6.5	6.5	6.5	6.5
2.2	225	1.24	1.28	1.26	0.945	0.945	0.158	7.9	7.9	7.9	7.9	7.9	7.9	7.9	7.9	7.9	7.9
2.7	275	1.24	1.28	1.26	0.945	0.945	0.158	7.7	7.7	7.7	7.7	7.7	7.7	7.7	7.7	7.7	-
3.3	335	1.24	1.28	1.26	0.945	0.945	0.158	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	-
3.9	395	1.24	1.28	1.26	0.945	0.945	0.158	7.7	7.7	7.7	7.7	7.7	7.7	7.7	7.7	11	-
4.7	475	1.24	1.28	1.26	0.945	0.945	0.158	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	-	-
5.6	565	1.24	1.28	1.26	0.945	0.945	0.158	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	-	-
6.8	685	1.24	1.28	1.26	0.945	0.945	0.158	12.3	12.3	12.3	12.3	12.3	12.3	12.3	-	-	-
8.2	825	1.24	1.28	1.26	0.945	0.945	0.158	14.7	14.7	14.7	14.7	14.7	14.7	14.7	-	-	-
10	106	1.24	1.28	1.26	0.945	0.945	0.158	15	15	15	15	15	15	15	-	-	-
12	126	1.24	1.28	1.26	0.945	0.945	0.158	15	15	15	15	15	15	-	-	-	-
15	156	1.24	1.28	1.26	0.945	0.945	0.158	15	15	15	15	15	15	-	-	-	-
18	186	1.24	1.28	1.26	0.945	0.945	0.158	15	15	15	15	15	-	-	-	-	-
22	226	1.24	1.28	1.26	0.945	0.945	0.158	15	15	15	15	15	-	-	-	-	-
39	396	1.24	1.28	1.26	0.945	0.945	0.158	15	15	15	15	-	-	-	-	-	-
47	476	1.24	1.28	1.26	0.945	0.945	0.158	15	15	15	15	-	-	-	-	-	-
56	566	1.24	1.28	1.26	0.945	0.945	0.158	15	15	15	15	-	-	-	-	-	-
68	686	1.24	1.28	1.26	0.945	0.945	0.158	15	15	15	-	-	-	-	-	-	-
82	826	1.24	1.28	1.26	0.945	0.945	0.158	15	15	15	-	-	-	-	-	-	-
100	107	1.24	1.28	1.26	0.945	0.945	0.158	15	15	15	-	-	-	-	-	-	-
120	127	1.24	1.28	1.26	0.945	0.945	0.158	15	15	-	-	-	-	-	-	-	-
150	157	1.24	1.28	1.26	0.945	0.945	0.158	15	15	-	-	-	-	-	-	-	-
180	187	1.24	1.28	1.26	0.945	0.945	0.158	15	-	-	-	-	-	-	-	-	-

RMS current rated at 300kHz up to 105°C.