
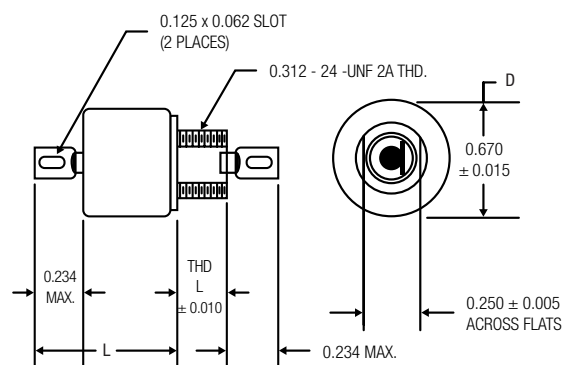


AC-RATED CERAMIC EMI-RFI FILTERS

C (20 dB/DECADE)

C (20 dB / DECADE)

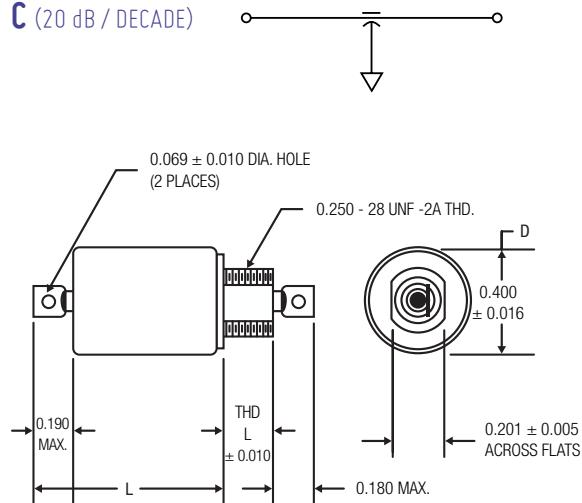

Current Rating (A)	DC Voltage Rating			D (in.)	Max. L (in.)	Thd. L (in.)	Min. Cap. (μF)	Max. R _{DC} (Ω)	Minimum Insertion Loss +25°C per MIL-STD-220							Dearborn Part Number
	@85°C DC (V)	@125°C DC (V)	@125°C 400Hz (V)						30kHz (dB)	75kHz (dB)	100kHz (dB)	150kHz (dB)	1MHz (dB)	10MHz (dB)	1GHz (dB)	
5.0	250	150	125	0.400	0.440	0.187	0.25	0.01	-	11	14	17	32	50	70	5JX3502
5.0	250	150	125	0.400	0.440	0.312	0.25	0.01	-	9.0	11	15	30	50	70	5JX3102
5.0	300	150	125	0.400	0.440	0.187	0.15	0.01	-	-	5.0	7.0	22	44	60	5JX3501
5.0	300	150	125	0.400	0.440	0.312	0.1	0.01	-	-	4.0	7.0	22	42	70	5JX3101
10	300	200	125	0.400	0.440	0.312	0.1	0.004	-	-	4.0	8.0	24	42	70	10JX2141
15	250	150	125	0.400	0.440	0.187	0.25	0.004	-	8.0	12	15	30	60	70	15JX3503
15	250	150	125	0.400	0.545	0.187	0.25	0.004	-	10	13	16	31	50	60	15JX2585
15	300	150	125	0.400	0.390	0.312	0.15	0.005	-	-	5.0	7.0	24	44	70	15JX2137
15	400	300	230	0.400	0.440	0.187	0.04	0.004	-	-	-	-	16	36	70	15JX3508
15	450	300	230	0.670	0.690	0.312	0.3	0.005	-	12	14	18	34	44	70	15JX3103