

Line-Matching Transformers - MTLM Series



MTLM 2001



MTLM 1200



MTLM 2010

Features

- Industry standards
- Low profile packages
- Meet, EN 60950
- Operating temperature range -25°C to +70°C
- Storage temperature range -40°C to +85°C

Electrical Data

ENCAPSULATED TRANSFORMERS

V. series	ID Code	Impedance prim./sec Ω	Insertion loss, max dB	Frequency response \pm dB	Return loss, min dB	Distortion max %	Balance min dB	Power max dB	Vd kVrms	Rdc prim./sec Ω	Ls max mH	Lp min H
V.22bis	MTLM1200	600 / 600	1.5	0.4	24	0.1	80	10	4	56 / 56	19	2.8 / 1.6
V.22bis	MTLM1201	600 / 600CT	1.5	0.4	24	0.1	80	10	4	56 / 56	17	2.8 / 1.6
V.22bis	MTLM1200E	600 / 600	1.5	0.4	24	0.1	80	10	4	66 / 66	17	2.8 / 1.6
V.22bis	MTLM1201E	600 / 600CT	1.5	0.4	24	0.1	80	10	4	66 / 66	17	2.8 / 1.6
V.22bis	MTLM1200C	600 / 600	1.5	0.4	24	0.1	80	10	4	62 / 62	16	2.8 / 1.6
V.22bis	MTLM1201B	600 / 600CT	1.5	0.4	24	0.1	80	10	4	62 / 62	16	2.8 / 1.6
V.22bis	MTLM3027M	600 / 600	1.0	0.25	24	0.3	70	5	4	34 / 34	7	1.7 / 1.7
V.22bis	MTLM6259	600 / 600	2.0	1	14	0.3	70	20	8	64 / 64	40	0.8 / 0.8

SMD NON-ENCAPSULATED TRANSFORMERS

V.22bis	MTLM3027S*	600 / 600	1	0.25	24	0.3	70	5	4	34 / 34	7	1.7 / 4.5
---------	------------	-----------	---	------	----	-----	----	---	---	---------	---	-----------

*These transformers do not meet EN41003

FAST DATA-RATE TRANSFORMERS

V.32bis	MTLM2010	600 / 600	1	0.25	20	0.1	80	10	4	25 / 25	7	2 min.
V.34	MTLM2001	600 / 600	1.5	0.5	24	0.1	80	20	4	56 / 56	19	4 / 3


DC CURRENT TRANSFORMERS

MTLM4498	600 / 2x150	1	-2.5	14	-	45	-	3	91 / 2x8	8	0.45 min.
----------	-------------	---	------	----	---	----	---	---	----------	---	-----------


MTLM4763: Idc = 60 mA with turns ratio 2/1: 1

Dimensions and Connections


MTLM 6259

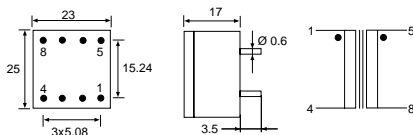


MTLM 4763

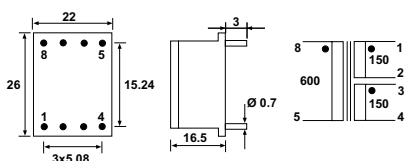


MTLM 1200 / 1200 E / 1200 C / 2001 / 2010

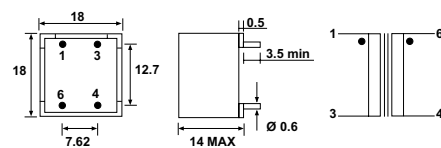


MTLM 3027S

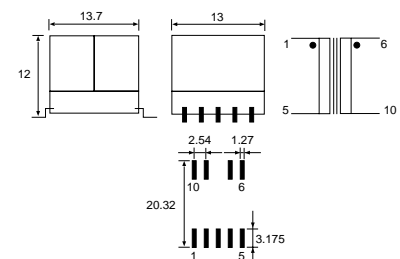

MTLM 3027M

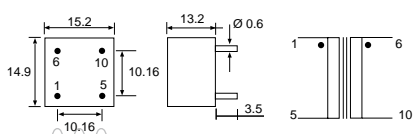

MTLM 1201 / 1201E / 1201B

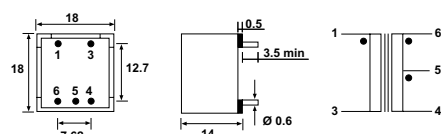

Applications

- Modems, Fax, PABX
- EFTPOS terminals
- Multi-media cards
- Alarm communicators
- Instrumentation