


# Glass Insulated High Temperature Heater Hook-Up Wire

HTGG Series  
Starts at  
**\$1.05**  
Per Foot



- ✓ 250°C (482°F) Temperature Rating
- ✓ UL and CSA Certified
- ✓ Single Stranded "A" Nickel Conductor
- ✓ Glass Insulation with Treated Glass Overbraid
- ✓ Ideal for Applications Where Outgassing May Be a Problem
- ✓ Treated Glass Braid

HTGG high-temperature lead wire is specifically engineered for cartridge, band and strip heaters in 250°C (482°F) applications where outgassing may be a problem. This product is also commonly used in higher temperature applications.

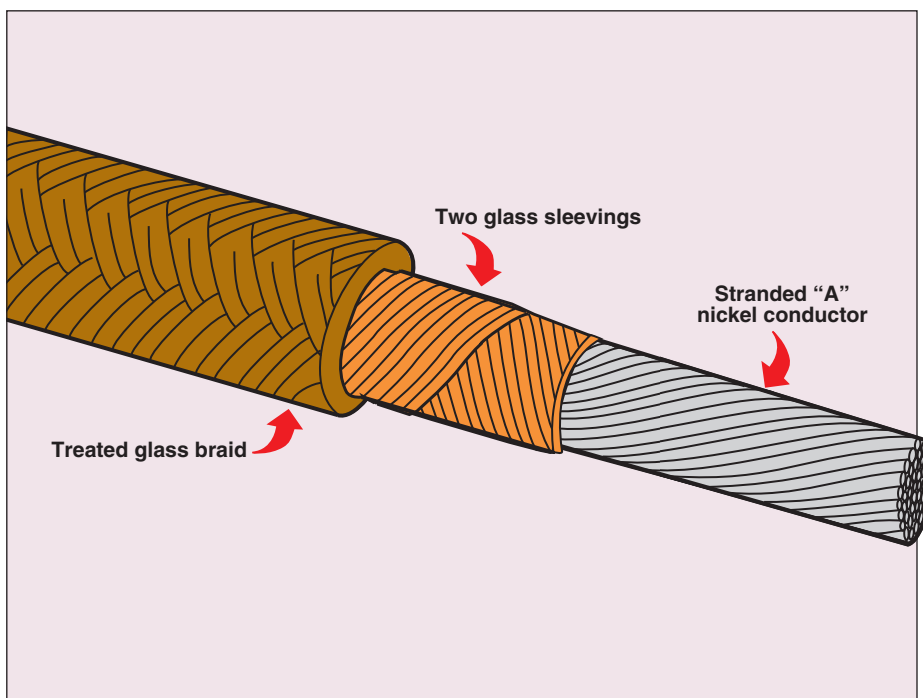

## CAUTION AND WARNING!

Fire and electrical shock may result if products are used improperly or installed or used by nonqualified personnel.

### Discount Schedule

50 to 99 ft. ....	10%
100 to 199 ft. ....	15%
200 to 499 ft. ....	20%
499 ft. and up .....	25%

**MOST POPULAR MODELS HIGHLIGHTED!**

## To Order (Specify Model Number)

Gage	Model No.	Type Price/ft	Stranded	Volts	Nominal OD mm (in )	Approx. Wt. kg/300 m (lb/1000')
22	HTGG-1NI-322S/C	\$1.05	7 x 30	300	2.2 (0.09)	3.4 (7.5)
20	HTGG-1NI-320S/C	1.15	10 x 30	300	2.4 (0.09)	4.1 (9.0)
18	HTGG-1NI-318S/C	1.45	16 x 30	300	2.6 (0.10)	5.2 (11.5)
16	HTGG-1NI-316S/C	2.05	26 x 30	300	2.8 (0.11)	7.0 (15.5)
14	HTGG-1NI-314S/C	3.15	41 x 30	300	3.2 (0.13)	11.8 (26.0)
12	HTGG-1NI-312S/C	4.55	65 x 30	300	3.7 (0.15)	16.3 (36.0)
10	HTGG-1NI-310S/C	6.80	105 x 30	300	4.6 (0.18)	23.4 (51.5)

**Standard Color:** Natural (off-white).

**Ordering Example:** HTGG-1NI-322S/C, a 50' spool of 22 gage stranded wire, \$1.05 x 50 = \$105 (less 20% discount) = **\$42.**

See heater hook-up wire introduction for current carrying capacity and derating.