

Thermocouple Extension Cables

With Molded Connectors

For Pricing and Details Visit omega.com/tec_rec_gec



"N" Calibration Available

- ✓ Retractable Cable in 1 and 4' Lengths with 5:1 Stretch
- ✓ 24 Gage (0.020" Dia.) PFA Coated or Glass Overbraided Stranded Wire in 10 and 25' Lengths
- ✓ Molded Quick Disconnect or Subminiature Thermocouple Connectors for Low Cost
- ✓ Available in J, K, T and E Calibrations


To order extension cables, specify desired connector combination from chart below

Code	Connector #1	Connector #2
1	OSTW, female	OSTW, female
2	OSTW, female	OST, male
3	OSTW, female	SMPW, female
4	OSTW, female	SMP, male
5	OST, male	OST, male
6	OST, male	SMPW, female
7	OST, male	SMP, male
8	SMPW, female	SMPW, female
9	SMPW, female	SMP, male
10	SMP, male	SMP, male
11	OSTW, female	Stripped leads
12	OST, male	Stripped leads
13	SMPW, female	Stripped leads
14	SMP, male	Stripped leads
15	OSTW, female	Spade lug
16	OST, male	Spade lug
17	SMPW, female	Spade lug
18	SMP, male	Spade lug

Note: OST and OSTW connectors are standard size; SMP and SMPW connectors are subminiature size.

ANSI color code shown


Shown smaller than actual size.

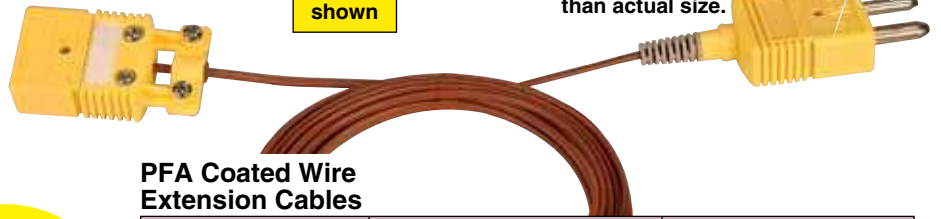

PFA Coated Wire Extension Cables

Model No.	Calibration	Length
TECJ10-(*)	J Iron-Constantan	3 m (10')
TECJ25-(*)		7.5 m (25')
TECK10-(*)	K CHROMEALOMEGA®	3 m (10')
TECK25-(*)		7.5 m (25')
TECT10-(*)	T Copper-Constantan	3 m (10')
TECT25-(*)		7.5 m (25')
TECE10-(*)	E CHROMEALOMEGA®-Constantan	3 m (10')
TECE25-(*)		7.5 m (25')

* Insert connector code from chart. Constructed from 24 gage stranded wire.

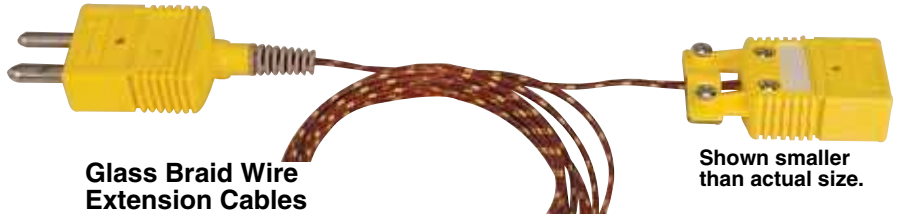

Glass Braid Wire Extension Cables

Model No.	Calibration	Length
GECJ10-(*)	J Iron-Constantan	3 m (10')
GECJ25-(*)		7.5 m (25')
GECK10-(*)	K CHROMEALOMEGA®	3 m (10')
GECK25-(*)		7.5 m (25')
GECT10-(*)	T Copper-Constantan	3 m (10')
GECT25-(*)		7.5 m (25')
GECE10-(*)	E CHROMEALOMEGA®-Constantan	3 m (10')
GECE25-(*)		7.5 m (25')

* Insert connector code from chart. Constructed from 24 gage stranded wire.

Shown smaller than actual size.

Retractable Extension Cables

Model No.	Calibration	Length
RECJ1-(*)	J Iron-Constantan	30 cm (1')
RECJ4-(*)		120 cm (4')
RECK1-(*)	K CHROMEALOMEGA®	30 cm (1')
RECK4-(*)		120 cm (4')
RECT1-(*)	T Copper-Constantan	30 cm (1')
RECT4-(*)		120 cm (4')
RECE1-(*)	E CHROMEALOMEGA®-Constantan	30 cm (1')
RECE4-(*)		120 cm (4')

* Insert connector code from chart.

Note: Retractable cables are expandable 5:1, so one foot will expand to 5' in length.

Ordering Example: RECK1-9, retractable extension cable, SMPW subminiature male or female.