

VERY-HIGH-ACCURACY AMPLIFIED VOLTAGE OUTPUT TRANSDUCER

STANDARD AND METRIC MODELS

0 to 5 Vdc Output

0-2 to 0-30,000 psi-Standard Models

0-150 mbar to 0-400 bar-Metric Models

STANDARD
PX01C0-075G5T
shown smaller
than actual size.

PX01/PXM01 Series



- ✓ 0.05% Linearity
- ✓ Internal Shunt Resistor for Easy System Checks
- ✓ 5-Point Calibration Provided
- ✓ All Stainless Steel Construction
- ✓ Hermetically Sealed Design for Harsh Environments
- ✓ Available in Gage, Absolute, Sealed Gage, psi, and Metric Ranges
- ✓ Cable or Connector Models
- ✓ Optional Pressure Ports to Fit Most Industrial Applications

PX01/PXM01 Series pressure transducers are very high-accuracy, amplified voltage output units for industrial applications. Their all stainless steel construction and hermetically sealed case make them suitable for harsh environments. A broad temperature-compensated range of 15 to 71°C (60 to 160°F) and excellent temperature compensation make these transducers very stable with fluctuating temperatures.

SPECIFICATIONS

Excitation: 24 to 32 Vdc

Output: 0 to 5 Vdc ± 0.03 Vdc

Linearity: 0.05% FSO

Hysteresis: 0.05% FSO

Repeatability: $\pm 0.05\%$ FSO

Zero Balance: 0 V ± 0.01 Vdc

Sensing Element: 4-active-arm bridge, using thick-film strain gages in a hermetically sealed chamber (except gage units)

Shunt Calibration Value: 80% FS


Operating Temp Range: -46 to 121°C (-50 to 250°F)

Compensated Temp Range: 16 to 71°C (60 to 160°F)

Thermal Effects:

Span: 0.002% of rdg/°F

Zero: 0.001% of FSO/°F

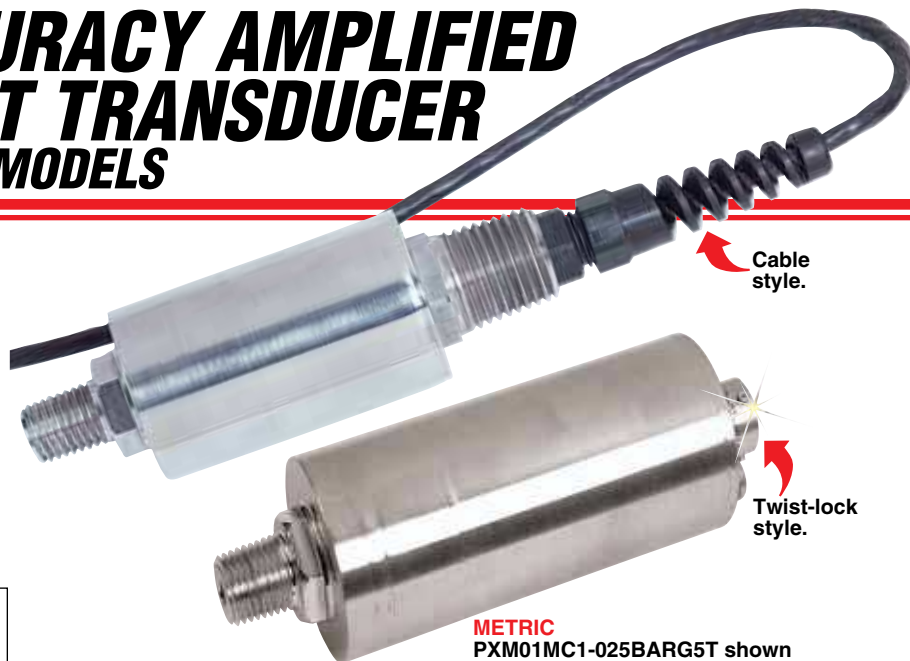

METRIC
PXM01MC1-025BARG5T shown smaller than actual size. See custom configurations chart on next page for ordering details.

Proof Pressure: 150% of rated pressure

Burst Pressure: 300% of rated pressure


Wetted Parts: 17-4 PH stainless steel

Pressure Port: See custom configurations


Electrical Connection: See custom configurations

Mating Connector: PT06F10-6S (sold separately)

Weight: 388 g (13.7 oz)

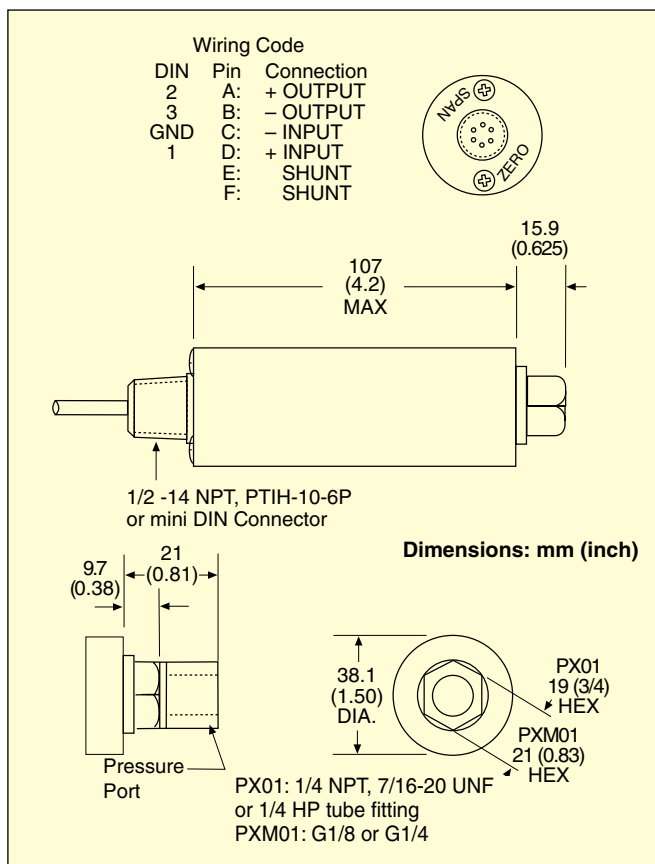

VERY-HIGH-ACCURACY ALL STAINLESS STEEL TRANSDUCER



"C" or "D"
models only

**1/4 NPT Pressure
Snubbers:**
PS-4G = Gas
PS-4E = Lt Oil
PS-4D = Dense Lq

STANDARD CUSTOM CONFIGURATIONS


PX01 SERIES	PRESSURE PORT [1]	ELECTRICAL CONNECTION [2]	RANGE (psi) [3]	UNITS [4]	OUTPUT [5]	OPTIONS [6]
	Models <10,000 psi		002	S,G,A	5T = 0 to 5 Vdc	OL = Overload stops + additional cost
C	= 1/8-18 NPT-M		005	S,G,A	5Z = Isolated 0 to 5V	OX = Cleaned for oxygen use + additional cost plus 2 weeks
D	= 1/8-18 NPT-F		010	S,G,A	10T = 0 to 10 Vdc output	()ft = Optional cable length in feet + additional cost/ft over 10 feet
J	= 7/16-20 UNF-M		015	S,G,A		
K	= 7/16-20 UNF-F		020	S,G,A		
	Models ≥10,000 psi		025	S,G,A		
S	= 1/4 HP tube fitting		050	S,G,A		
			075	S,G,A		
			100	S,G,A		
	0 = 3 m (10') cable (std)		150	S,G,A		
	+ add cost/ft over 3 m (10')		200	S,G,A		
	1 = PTIH-10-6P connector		250	S,G,A		
	(or equal)		300	S,G,A		
	Mating connector		500	S,G,A		
	(sold separately), order		750	S,G,A		
	PT06F10-6S		1K	S,G,A		
	6 = mini DIN connector		1.5K	S,G,A		
	*no shunt cal		2K	S,G,A		
			3K	S,G,A		
			3.5K	S,G,A		
			5K	S,G,A		
			7.5K	S,G,A		
			10K†	S,G,A		
			20K†	S,G,A		
			30K†	S,G,A		
For additional options including extended compensated temperatures, see newportUS.com						

To order a custom configuration:


1. Select a pressure port
2. Select electrical connection
3. Select a pressure range
4. Select pressure units
5. Select output
6. Select options

† Supplied with 1/4 HP tube fitting.

Ordering Examples: PX01C1-100G5T, 100 psi gage pressure transducer with 1/4-18 NPT male fitting, PTIH-10-6P, connector and 0 to 5 Vdc output. PT06F10-6S, mating connector (sold separately). PX01K0-1KS5Z, 1000 psi sealed gage pressure transducer with 7/16-20 UNF female fitting, 3 m (10') cable, isolated 0 to 5 Vdc output. PX01J1-015A5T, 15 psi absolute pressure transducer with 7/16-20 UNF male fitting, PTIH-10-6P, connector, 0 to 5 Vdc output. PT06F10-6S, mating connector (sold separately).



**Mating
Connector
PT06F10-6S**



**G1/2 Pressure
Snubbers:**
PS-4G-MG = Gas
PS-4E-MG = Lt Oil
PS-4D-MG = Dense
Liquid

METRIC CUSTOM CONFIGURATIONS

PXM01 SERIES	PRESSURE PORT [1]	ELECTRICAL CONNECTION [2]	RANGE (bar) [3]	UNITS [4]	OUTPUT [5]	OPTIONS [6]
MA	= G1/2B Male		0.16	S,G,A	5T = 0 to 5 Vdc	OX = Cleaned for oxygen service
MB	= G1/2B Female		0.4	S,G,A	5Z = isolated 0 to 5 Vdc	OL = Overload stops
MC	= G1/2B Male		1.0	S,G,A	10T = 0 to 10 Vdc	()m = Optional cable length in meters + additional cost/m over 3 m
MD	= G1/2B Female		1.6	S,G,A		
			2.5	S,G,A		
			4.0	S,G,A		
	0 = 3 m (10') cable (std)		6.0	S,G,A		
	+ add cost/m over 3 m (10')		10	S,G,A		
	1 = PTIH-10-6P connector (or equal)		16	S,G,A		
	Mating connector		25	S,G,A		
	(sold separately), order		40	S,G,A		
	PT06F10-6S		60	S,G,A		
	6 = mini DIN connector*		100	S,G,A		
	*no shunt cal		160	S,G,A		
			250	S,G,A		
			400	S,G,A		
For additional options including extended compensated temperatures, see newportUS.com						

To order a custom configuration:

1. Select a pressure port
2. Select electrical connection
3. Select a pressure range
4. Select pressure units
5. Select output
6. Select options

Ordering Examples: PXM01MB0-010BARS5T, 10 bar sealed gage pressure transducer with G1/2B female connection, 3 m (10') cable termination, and 0 to 5 Vdc output.

PXM01MC1-010BARA10T, 10 bar absolute pressure transducer with G1/2B male connection, twist-lock connector and 0 to 10 Vdc output. PT06F10-6S, mating connector (sold separately).

VERY-HIGH-ACCURACY AMPLIFIED OUTPUT TRANSDUCER

ALL STAINLESS STEEL CONSTRUCTION

STANDARD MODELS

To Order Visit newportUS.com/px01-5v for Pricing and Details

RANGE psi	bar	1/16-20 UNF MODEL NO.	1/4 NPT MODEL NO.	COMPATIBLE METERS*
Connector Style – Absolute Pressure (All Ranges Available in Absolute Pressure)				
0 to 10	0 to 0.69	PX01K1-010A5T	PX01C1-010A5T	DP41-E, DP25B-E
0 to 15	0 to 1.0	PX01K1-015A5T	PX01C1-015A5T	DP41-E, DP25B-E
0 to 20	0 to 1.4	PX01K1-020A5T	PX01C1-020A5T	DP41-E, DP25B-E
0 to 25	0 to 1.7	PX01K1-025A5T	PX01C1-025A5T	DP41-E, DP25B-E
0 to 50	0 to 3.4	PX01K1-050A5T	PX01C1-050A5T	DP41-E, DP25B-E
Connector Style – Gage Pressure (All Ranges Also Available in Sealed Gage Pressure)				
0 to 2	0 to 0.14	PX01K1-002G5T	PX01C1-002G5T	DP41-E, DP25B-E
0 to 5	0 to 0.34	PX01K1-005G5T	PX01C1-005G5T	DP41-E, DP25B-E
0 to 10	0 to 0.69	PX01K1-010G5T	PX01C1-010G5T	DP41-E, DP25B-E
0 to 15	0 to 1.0	PX01K1-015G5T	PX01C1-015G5T	DP41-E, DP25B-E
0 to 50	0 to 3.4	PX01K1-050G5T	PX01C1-050G5T	DP41-E, DP25B-E
0 to 75	0 to 5.2	PX01K1-075G5T	PX01C1-075G5T	DP41-E, DP25B-E
0 to 100	0 to 6.9	PX01K1-100G5T	PX01C1-100G5T	DP41-E, DP25B-E
0 to 200	0 to 13.8	PX01K1-200G5T	PX01C1-200G5T	DP41-E, DP25B-E
0 to 300	0 to 20.7	PX01K1-300G5T	PX01C1-300G5T	DP41-E, DP25B-E
0 to 500	0 to 34.5	PX01K1-500G5T	PX01C1-500G5T	DP41-E, DP25B-E
0 to 1000	0 to 68.9	PX01K1-1KG5T	PX01C1-1KG5T	DP41-E, DP25B-E
0 to 1500	0 to 103	PX01K1-1.5KG5T	PX01C1-1.5KG5T	DP41-E, DP25B-E
0 to 2000	0 to 138	PX01K1-2KG5T	PX01C1-2KG5T	DP41-E, DP25B-E
0 to 3500	0 to 241	PX01K1-3.5KG5T	PX01C1-3.5KG5T	DP41-E, DP25B-E
0 to 5000	0 to 345	PX01K1-5KG5T	PX01C1-5KG5T	DP41-E, DP25B-E
0 to 7500	0 to 517	PX01K1-7.5KG5T	PX01C1-7.5KG5T	DP41-E, DP25B-E
0 to 10,000**	0 to 689	PX01S1-10KG5T†	PX01S1-10KG5T†	DP41-E, DP25B-E**
0 to 20,000**	0 to 1379	PX01S1-20KG5T†	PX01S1-20KG5T†	DP41-E, DP25B-E**
0 to 30,000**	0 to 2068	PX01S1-30KG5T†	PX01S1-30KG5T†	DP41-E, DP25B-E**

Comes complete with 5-point NIST-traceable calibration. * See newportUS.com for compatible meters. ** 4-digit meter, counts in increments of 10. † 1/4" HP tube fitting

To order absolute pressure, replace "G" in model number with "A" and add cost to price. To order sealed gage units, replace "G" in model number with "S" (no extra charge).

Ordering Examples: PX01K1-1KG5T, 1000 psi gage transducer with 0 to 5V output, twist-lock connector and 1/16-20 UNF female pressure connection. PT06F10-6S, mating connector (sold separately). PX01C0-010G5T, 10 psi gage transducer with 0 to 5V output, 3 m (10') cable and 1/4 NPT male pressure connection.

METRIC MODELS

RANGE	G 1/4 FEMALE MODEL NO.	COMPATIBLE METERS*
Connector Style		
0 to 0.16 bar	0 to 2.32 psi	PXM01MD0-160mBARG5T
0 to 0.4 bar	0 to 5.8 psi	PXM01MD0-400mBARG5T
0 to 1 bar	0 to 15 psi	PXM01MD0-001BARG5T
0 to 1.60 bar	0 to 23 psi	PXM01MD0-1.60BARG5T
0 to 2.50 bar	0 to 36 psi	PXM01MD0-2.50BARG5T
0 to 4 bar	0 to 58 psi	PXM01MD0-004BARG5T
0 to 6 bar	0 to 87 psi	PXM01MD0-006BARG5T
0 to 10 bar	0 to 145 psi	PXM01MD0-010BARG5T
0 to 16 bar	0 to 232 psi	PXM01MD0-016BARG5T
0 to 25 bar	0 to 363 psi	PXM01MD0-025BARG5T
0 to 40 bar	0 to 580 psi	PXM01MD0-040BARG5T
0 to 60 bar	0 to 870 psi	PXM01MD0-060BARG5T
0 to 100 bar	0 to 1450 psi	PXM01MD0-100BARG5T
0 to 160 bar	0 to 2321 psi	PXM01MD0-160BARG5T
0 to 250 bar	0 to 3626 psi	PXM01MD0-250BARG5T
0 to 400 bar	0 to 5802 psi	PXM01MD0-400BARG5T

Comes complete with 5-point NIST traceable calibration. * See newportUS.com for compatible meters. To order absolute pressure models, replace "G" in model number with "A" and add cost to price. To order sealed gage models, replace "G" in model number to "S" (no extra charge). To order male thread, see Custom Configurations on next page.

Ordering Examples: PXM01MD6-004BARG5T, 4 bar gage transducer with 0 to 5 V output, mini DIN connector and G1/4 female pressure connection. Mating connector included. PXM01MD0-1.60BARA5T, 1.6 bar absolute transducer with 0 to 5 V output, 3 m (10') cable with 1/2 NPT conduit fitting and G1/4 female pressure connection.

Twist-lock
style.




STANDARD
PX01C1-100G5T
shown smaller
than actual size.

mini DIN
style.



METRIC

PXM01MC6-010BARG5T shown
smaller than actual size.



Mating
Connector
PT06F10-6S

ACCESSORY

MODEL NO.	DESCRIPTION
PT06F10-6S	Mating connector for PX01/PXM01 transducers with twist-lock connector