

MINIATURE FLUSH DIAPHRAGM PRESSURE TRANSDUCER

1/2-20 UNF PRESSURE CONNECTION



PX61V Series
mV/V Output
0-50 to 0-15,000 psi
0-3 to 0-1000 bar

All Ranges
\$295



Shown larger
than actual size.



PX61V1-100GV, \$295,
with connector style
electrical connection,
shown actual size.



- ✓ Miniature Flush Diaphragm
- ✓ All Stainless Steel Construction
- ✓ Available in psia, psis, psig, and Metric Ranges

SPECIFICATIONS

Excitation: 5 Vdc

Output: 2 mV/V -20% +50%
(1 mV/V 50 psi ranges)

Accuracy: 1.0% linearity and hysteresis combined

Repeatability: $\pm 0.1\%$ of FSO

Balance: $\pm 2.0\%$ of FSO

Bridge Resistance: 350 Ω nominal

Operating Temperature Range:
-54 to 121°C (-65 to 250°F)

Compensated Temperature Range:
16 to 71°C (60 to 160°F)

Thermal Effects:

Zero: $\pm 0.01\%$ FS/°F

Span: $\pm 0.02\%$ FSO/°F

Proof Pressure: 150% of capacity

Burst Pressure Minimum:
300% of capacity or 30,000 psi,
whichever is less


Electrical Connections: 1.5 m (5');
4-conductor cable or PTIH-10-6P
connector

Pressure Connection: 1/2-20 UNF-2A

Wetted Parts: 17-4 PH stainless steel

ACCESSORY

MODEL NO.	PRICE	DESCRIPTION
PT06F10-6S	\$26.50	Mating connector for PX61V1 series transducers

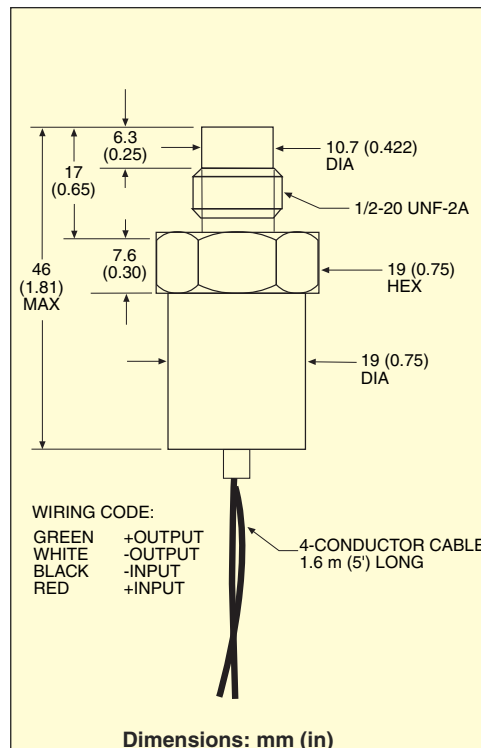

MOST POPULAR MODELS HIGHLIGHTED!

To Order (Specify Model Number)

RANGE		MODEL NO.	PRICE	COMPATIBLE METERS**
ABSOLUTE PRESSURE (All Ranges Available in Absolute Pressure)				
0 to 50 psi	0 to 3.4 bar	PX61V[*]-050AV	\$295	DP41-S, DP25B-S
0 to 100 psi	0 to 6.9 bar	PX61V[*]-100AV	295	DP41-S, DP25B-S
GAGE PRESSURE (All Ranges Also Available in Sealed Gage Pressure)				
0 to 50 psi	0 to 3.4 bar	PX61V[*]-050GV	\$295	DP41-S, DP25B-S
0 to 100 psi	0 to 6.9 bar	PX61V[*]-100GV	295	DP41-S, DP25B-S
0 to 150 psi	0 to 10.3 bar	PX61V[*]-150GV	295	DP41-S, DP25B-S
0 to 200 psi	0 to 13.8 bar	PX61V[*]-200GV	295	DP41-S, DP25B-S
0 to 300 psi	0 to 20.7 bar	PX61V[*]-300GV	295	DP41-S, DP25B-S
0 to 500 psi	0 to 34.5 bar	PX61V[*]-500GV	295	DP41-S, DP25B-S
0 to 1000 psi	0 to 68.9 bar	PX61V[*]-1KGV	295	DP41-S, DP25B-S
0 to 2500 psi	0 to 172 bar	PX61V[*]-2.5KGV	295	DP41-S, DP25B-S
0 to 5000 psi	0 to 345 bar	PX61V[*]-5KGV	295	DP41-S, DP25B-S
0 to 10,000 psi	0 to 689 bar	PX61V[*]-10KGV	295	DP41-S, DP25B-S
0 to 15,000 psi	0 to 1034 bar	PX61V[*]-15KGV	295	DP41-S, DP25B-S†

Comes complete with 5-point NIST-traceable calibration.

Metric ranges available – Consult Engineering.

† 4-digit meter, counts in increments of 10.

** See section D for compatible meters.

[*] To order cable style insert "0", to order connector style insert "1".

To order psia models, replace "G" in model number with "A".

To order psis models, replace "G" in model number with "S".

Ordering Examples: PX61V0-100AV, 100 psi absolute pressure transducer with 1.5 m (5') cable and 1/2-20 UNF male pressure port, \$295.

PX61V0-100SV, 100 psi sealed gage pressure transducer with 1.5 m (5') cable and 1/2-20 UNF male pressure port, \$295.

