


Probes for PFA Extruders With Hastelloy® Tips

- ✓ Hastelloy C-276 Tips Withstand High Temperatures and Pressures of PFA Extruders
- ✓ Single or Dual Elements
- ✓ J, K, T, or E Calibrations
- ✓ Rigid or Flexible Connectors
- ✓ Tip "A" Lengths: Flush, 0.25, 0.5, 0.75 or 1.0"
- ✓ Barrel "B" Lengths: 3 or 6"
- ✓ 1/2"-20 NF Barrel Threads
- ✓ 220°C (425°F) Max, Temperature for Connector
- ✓ 510°C (950°F) Max, Service Temperature for Probes only

TEX Series Starts at
\$100

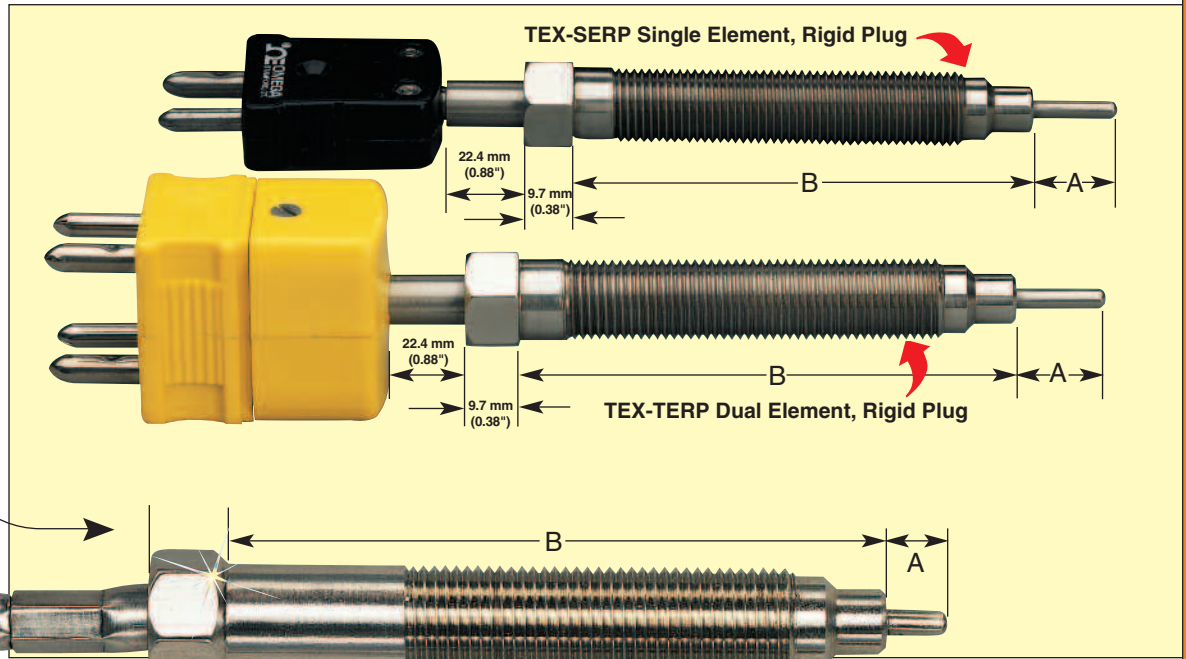

TEX-TEFE Dual Element, Flexible Extension

MOST POPULAR MODELS HIGHLIGHTED!

To Order (Specify Model Number)

Model No.	Price	"B" Dimension	Extension Length Over 6" Add
TEX-SEFE-(*)-(A)-3	\$100	3"	\$2/foot
TEX-SEFE-(*)-(A)-6	108	6"	\$2/foot
TEX-TEFE-(*)-(A)-3	121	3"	3/foot
TEX-TEFE-(*)-(A)-6	128	6"	3/foot
TEX-SERP-(*)-(A)-3	100	3"	N/A
TEX-SERP-(*)-(A)-6	108	6"	N/A
TEX-TERP-(*)-(A)-3	121	3"	N/A
TEX-TERP-(*)-(A)-6	128	6"	N/A

Ordering Example: **TEX-SEFE-J-1/4-6** is a Type J single element extruder probe with a 150 mm (6") flexible extension with OSTW connector, a 1/4" hastelloy tip (A dim.) and a 6" barrel (B dim), \$108. *: Insert Calibration Code **J, K, T, or E**
A: Insert "A" length: **Flush, 1/4", 1/2", 3/4" or 1"**

150 mm (6")

Note: Custom barrel configurations are available.

