


Rugged Transition Joint Probes

With Standard Dimensions

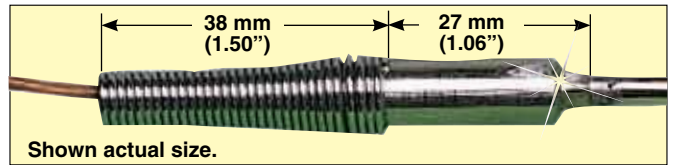

Note: Visit newportUS.com for probe terminations and compression fittings.

- ✓ 304 SS, 310 SS, 316 SS, 321 SS, Inconel® or Super OMEGA CLAD® XL Sheath
- ✓ Diameters from 1/16" to 1/4"
- ✓ 40" PFA Coated Stranded Lead Wire: 20 AWG for 3/16" and 1/4" OD, 24 AWG for 1/16" and 1/8" OD Probes
- ✓ Cal-5 Available

NEWPORT® heavy duty transition joint probes offer convenient termination to PFA coated lead wire. The transition joint is 1.63" long, with a 1" spring for strain relief. The joint diameter is 1/4" for 1/16" and 1/8" Dia. probes, 3/8" for 3/16" and 1/4" Dia. probes.

Dual Element TJ Probes
To Order, add suffix **"-DUAL"** to model no. Add to base probe price any options (extra probe length, overbraiding, armored cable), then multiply this price x 1.75.
Ordering Example: TJ36-CASS-14G-12-DUAL.

For additional PFA lead wire length, add an additional cost per 12" over 40" and change **"36"** in part no. to desired length in inches.
Ordering Example: TJ120-ICSS-14G-12, type J transition joint probe with 120" of PFA lead wire, 1/4" OD stainless steel sheath, 12" length.



310 Stainless Steel Sheaths
To Order, replace **"SS"** in model no. with 310SS, no add'l charge. **Ordering Example:** TJ36-CA310SS-18G-12, type K transition joint probe with 310 stainless steel sheath.

Discount Schedule	
1-10 units	Net
11-24 units	10%
25-49 units	20%
50 and up	Consult Sales

To Order Visit newportUS.com/tj36 for Pricing and Details

Alloy/ANSI Color Code	Sheath Dia. (")	Model No. 12" Length	Model No. 18" Length	Model No. 24" Length
IRON-CONSTANTAN Inconel Sheath J	1/16"	TJ36-ICIN-116(*)-12	TJ36-ICIN-116(*)-18	TJ36-ICIN-116(*)-24
	1/8"	TJ36-ICIN-18(*)-12	TJ36-ICIN-18(*)-18	TJ36-ICIN-18(*)-24
	3/16"	TJ36-ICIN-316(*)-12	TJ36-ICIN-316(*)-18	TJ36-ICIN-316(*)-24
	1/4"	TJ36-ICIN-14(*)-12	TJ36-ICIN-14(*)-18	TJ36-ICIN-14(*)-24
IRON-CONSTANTAN 304 SS Sheath J	1/16"	TJ36-ICSS-116(*)-12	TJ36-ICSS-116(*)-18	TJ36-ICSS-116(*)-24
	1/8"	TJ36-ICSS-18(*)-12	TJ36-ICSS-18(*)-18	TJ36-ICSS-18(*)-24
	3/16"	TJ36-ICSS-316(*)-12	TJ36-ICSS-316(*)-18	TJ36-ICSS-316(*)-24
	1/4"	TJ36-ICSS-14(*)-12	TJ36-ICSS-14(*)-18	TJ36-ICSS-14(*)-24
CHROMEGLA®-ALOMEGA®** Inconel Sheath K	1/16"	TJ36-CAIN-116(*)-12	TJ36-CAIN-116(*)-18	TJ36-CAIN-116(*)-24
	1/8"	TJ36-CAIN-18(*)-12	TJ36-CAIN-18(*)-18	TJ36-CAIN-18(*)-24
	3/16"	TJ36-CAIN-316(*)-12	TJ36-CAIN-316(*)-18	TJ36-CAIN-316(*)-24
	1/4"	TJ36-CAIN-14(*)-12	TJ36-CAIN-14(*)-18	TJ36-CAIN-14(*)-24
CHROMEGLA®-ALOMEGA® 304 SS Sheath K	1/16"	TJ36-CASS-116(*)-12	TJ36-CASS-116(*)-18	TJ36-CASS-116(*)-24
	1/8"	TJ36-CASS-18(*)-12	TJ36-CASS-18(*)-18	TJ36-CASS-18(*)-24
	3/16"	TJ36-CASS-316(*)-12	TJ36-CASS-316(*)-18	TJ36-CASS-316(*)-24
	1/4"	TJ36-CASS-14(*)-12	TJ36-CASS-14(*)-18	TJ36-CASS-14(*)-24
CHROMEGLA®-CONSTANTAN Inconel Sheath E	1/16"	TJ36-CXIN-116(*)-12	TJ36-CXIN-116(*)-18	TJ36-CXIN-116(*)-24
	1/8"	TJ36-CXIN-18(*)-12	TJ36-CXIN-18(*)-18	TJ36-CXIN-18(*)-24
	3/16"	TJ36-CXIN-316(*)-12	TJ36-CXIN-316(*)-18	TJ36-CXIN-316(*)-24
	1/4"	TJ36-CXIN-14(*)-12	TJ36-CXIN-14(*)-18	TJ36-CXIN-14(*)-24
CHROMEGLA®-CONSTANTAN 304 SS Sheath E	1/16"	TJ36-CXSS-116(*)-12	TJ36-CXSS-116(*)-18	TJ36-CXSS-116(*)-24
	1/8"	TJ36-CXSS-18(*)-12	TJ36-CXSS-18(*)-18	TJ36-CXSS-18(*)-24
	3/16"	TJ36-CXSS-316(*)-12	TJ36-CXSS-316(*)-18	TJ36-CXSS-316(*)-24
	1/4"	TJ36-CXSS-14(*)-12	TJ36-CXSS-14(*)-18	TJ36-CXSS-14(*)-24
COPPER-CONSTANTAN Inconel Sheath T	1/16"	TJ36-CPIN-116(*)-12	TJ36-CPIN-116(*)-18	TJ36-CPIN-116(*)-24
	1/8"	TJ36-CPIN-18(*)-12	TJ36-CPIN-18(*)-18	TJ36-CPIN-18(*)-24
	3/16"	TJ36-CPIN-316(*)-12	TJ36-CPIN-316(*)-18	TJ36-CPIN-316(*)-24
	1/4"	TJ36-CPIN-14(*)-12	TJ36-CPIN-14(*)-18	TJ36-CPIN-14(*)-24
COPPER-CONSTANTAN 304 SS Sheath T	1/16"	TJ36-CPSS-116(*)-12	TJ36-CPSS-116(*)-18	TJ36-CPSS-116(*)-24
	1/8"	TJ36-CPSS-18(*)-12	TJ36-CPSS-18(*)-18	TJ36-CPSS-18(*)-24
	3/16"	TJ36-CPSS-316(*)-12	TJ36-CPSS-316(*)-18	TJ36-CPSS-316(*)-24
	1/4"	TJ36-CPSS-14(*)-12	TJ36-CPSS-14(*)-18	TJ36-CPSS-14(*)-24
OMEGALLOY®-NICROSIL-NISIL** Inconel Sheath N	1/16"	TJ36-NNIN-116(*)-12	TJ36-NNIN-116(*)-18	TJ36-NNIN-116(*)-24
	1/8"	TJ36-NNIN-18(*)-12	TJ36-NNIN-18(*)-18	TJ36-NNIN-18(*)-24
	3/16"	TJ36-NNIN-316(*)-12	TJ36-NNIN-316(*)-18	TJ36-NNIN-316(*)-24
	1/4"	TJ36-NNIN-14(*)-12	TJ36-NNIN-14(*)-18	TJ36-NNIN-14(*)-24

Note: Other lengths are available, consult Sales. 6" probes also available, change **"-12"** to **"-6"** to order. No additional charge. To order optional sheaths, change **"SS"** in Model no. to **"IN"** for Inconel, **"304SS"** for 304 SS, **"310SS"** for 310 SS, **"316SS"** for 316 SS or **"321SS"** for 321 SS. No additional charge.

* Specify junction type: **E** (Exposed), **G** (Grounded) or **U** (Ungrounded). For lengths from 2 to 12", please consult Sales.

** For Super OMEGA CLAD® XL, change **"IN"** to **"XL"** there is an additional price.

Ordering Examples: TJ36-CASS-18U-12, heavy duty transition joint probe, Type K (CHROMEGLA®-ALOMEGA®), 304 SS sheath, 1/8" OD, ungrounded junction, 12" length. TJ36-NNXL-14G-12, Type N transition joint probe with Super OMEGA CLAD® XL, 1/4" OD stainless steel sheath, 12" length.

Rugged Transition Joint Probes

With **Metric** Dimensions

Shown smaller than actual size.

Note: Visit newportUS.com for probe terminations and compression fittings.

- ✓ 304 SS, 310 SS, 316 SS, 321 SS, Inconel® or Super OMEGA CLAD® XL Sheath
- ✓ Diameters from 1.5 to 6 mm
- ✓ 1 m PFA Coated Stranded Lead Wire: 20 AWG for 4.5 and 6 mm OD, 24 AWG for 1.5 and 3 mm OD Probes
- ✓ Cal-5 Available

NEWPORT® heavy duty transition joint probes offer convenient termination to PFA coated lead wire. The transition joint is 41.4 mm long, with a 25.4 mm spring for strain relief. The joint diameter is 6.4 mm for 1.5 and 3 mm Dia. probes, 9.7 mm for 4.5 and 6 mm Dia. probes.

Dual Element TJ Probes

To Order, add suffix “-DUAL” to model no. Add to base probe price plus any options (extra probe length, overbraiding, armored cable), then multiply this price x 1.75.
Ordering Example:
 TJ1-CASS-M600G-300-DUAL.

For additional PFA lead wire length, add an **additional cost** per meter over 1 m and change “1” in part no. to desired total length in meters.

Ordering Example: TJ3-ICSS-M600G-300, type J transition joint probe with 3 m of PFA lead wire, 6mm OD stainless steel sheath, 300mm probe length..



Available as
 See page A-43 to A-48.

310 Stainless Steel Sheath

To Order, replace “SS” in Model no. with 310SS, no add'l charge. **Ordering Example:** TJ1-CA310SS-M600G-300, type K transition joint probe with 310 stainless steel sheath.

Discount Schedule

1-10 units Net
11-24 units 10%
25-49 units 20%
50 and up Consult Sales

To Order Visit newportUS.com/TJ36 for Pricing and Details

Alloy/ANSI Color Code	Sheath Dia. mm	Model No. 300 mm Length	Model No. 450 mm Length	Model No. 600 mm Length
IRON-CONSTANTAN Inconel Sheath	J	TJ1-ICIN-M15(*)-300	TJ1-ICIN-M15(*)-450	TJ1-ICIN-M15(*)-600
		TJ1-ICIN-M30(*)-300	TJ1-ICIN-M30(*)-450	TJ1-ICIN-M30(*)-600
		TJ1-ICIN-M45(*)-300	TJ1-ICIN-M45(*)-450	TJ1-ICIN-M45(*)-600
		TJ1-ICIN-M60(*)-300	TJ1-ICIN-M60(*)-450	TJ1-ICIN-M60(*)-600
IRON-CONSTANTAN 304 SS Sheath	J	TJ1-ICSS-M15(*)-300	TJ1-ICSS-M15(*)-450	TJ1-ICSS-M15(*)-600
		TJ1-ICSS-M30(*)-300	TJ1-ICSS-M30(*)-450	TJ1-ICSS-M30(*)-600
		TJ1-ICSS-M45(*)-300	TJ1-ICSS-M45(*)-450	TJ1-ICSS-M45(*)-600
		TJ1-ICSS-M60(*)-300	TJ1-ICSS-M60(*)-450	TJ1-ICSS-M60(*)-600
CHROMEGA®-ALOMEGA® ** Inconel Sheath	K	TJ1-CAIN-M15(*)-300	TJ1-CAIN-M15(*)-450	TJ1-CAIN-M15(*)-600
		TJ1-CAIN-M30(*)-300	TJ1-CAIN-M30(*)-450	TJ1-CAIN-M30(*)-600
		TJ1-CAIN-M45(*)-300	TJ1-CAIN-M45(*)-450	TJ1-CAIN-M45(*)-600
		TJ1-CAIN-M60(*)-300	TJ1-CAIN-M60(*)-450	TJ1-CAIN-M60(*)-600
CHROMEGA®-ALOMEGA® 304 SS Sheath	K	TJ1-CASS-M15(*)-300	TJ1-CASS-M15(*)-450	TJ1-CASS-M15(*)-600
		TJ1-CASS-M30(*)-300	TJ1-CASS-M30(*)-450	TJ1-CASS-M30(*)-600
		TJ1-CASS-M45(*)-300	TJ1-CASS-M45(*)-450	TJ1-CASS-M45(*)-600
		TJ1-CASS-M60(*)-300	TJ1-CASS-M60(*)-450	TJ1-CASS-M60(*)-600
CHROMEGA®-CONSTANTAN Inconel Sheath	E	TJ1-CXIN-M15(*)-300	TJ1-CXIN-M15(*)-450	TJ1-CXIN-M15(*)-600
		TJ1-CXIN-M30(*)-300	TJ1-CXIN-M30(*)-450	TJ1-CXIN-M30(*)-600
		TJ1-CXIN-M45(*)-300	TJ1-CXIN-M45(*)-450	TJ1-CXIN-M45(*)-600
		TJ1-CXIN-M60(*)-300	TJ1-CXIN-M60(*)-600	TJ1-CXIN-M60(*)-600
CHROMEGA®-CONSTANTAN 304 SS Sheath	E	TJ1-CXSS-M15(*)-300	TJ1-CXSS-M15(*)-450	TJ1-CXSS-M15(*)-600
		TJ1-CXSS-M30(*)-300	TJ1-CXSS-M30(*)-450	TJ1-CXSS-M30(*)-600
		TJ1-CXSS-M45(*)-300	TJ1-CXSS-M45(*)-450	TJ1-CXSS-M45(*)-600
		TJ1-CXSS-M60(*)-300	TJ1-CXSS-M60(*)-450	TJ1-CXSS-M60(*)-600
COPPER-CONSTANTAN Inconel Sheath	T	TJ1-CPIN-M15(*)-300	TJ1-CPIN-M15(*)-450	TJ1-CPIN-M15(*)-600
		TJ1-CPIN-M30(*)-300	TJ1-CPIN-M30(*)-450	TJ1-CPIN-M30(*)-600
		TJ1-CPIN-M45(*)-300	TJ1-CPIN-M45(*)-450	TJ1-CPIN-M45(*)-600
		TJ1-CPIN-M60(*)-300	TJ1-CPIN-M60(*)-450	TJ1-CPIN-M60(*)-600
COPPER-CONSTANTAN 304 SS Sheath	T	TJ1-CPSS-M15(*)-300	TJ1-CPSS-M15(*)-450	TJ1-CPSS-M15(*)-600
		TJ1-CPSS-M30(*)-300	TJ1-CPSS-M30(*)-450	TJ1-CPSS-M30(*)-600
		TJ1-CPSS-M45(*)-300	TJ1-CPSS-M45(*)-450	TJ1-CPSS-M45(*)-600
		TJ1-CPSS-M60(*)-300	TJ1-CPSS-M60(*)-450	TJ1-CPSS-M60(*)-600
OMEGALLOY®-NICROSIL-NISIL ** Inconel Sheath	N	TJ1-NNIN-M15(*)-300	TJ1-NNIN-M15(*)-450	TJ1-NNIN-M15(*)-600
		TJ1-NNIN-M30(*)-300	TJ1-NNIN-M30(*)-450	TJ1-NNIN-M30(*)-600
		TJ1-NNIN-M45(*)-300	TJ1-NNIN-M45(*)-450	TJ1-NNIN-M45(*)-600
		TJ1-NNIN-M60(*)-300	TJ1-NNIN-M60(*)-450	TJ1-NNIN-M60(*)-600

Note: Other lengths are available, consult Sales. Shorter probes are also available, change “-300” at the end of the model number to the required length in millimeters, no additional charge. To order optional sheaths, change “SS” in model number to “IN” for Inconel, “304SS” for 304 SS, “310SS” for 310 SS, “316SS” for 316 SS or “321SS” for 321 SS, no additional charge.

* Specify junction type: E (Exposed), G (Grounded) or U (Ungrounded). For lengths from 50 to 300 mm, please consult Sales Department.

** For Super OMEGA CLAD® XL, change “IN” to “XL” and add additional cost.

Ordering Example: TJ1-CAIN-M15G-300, heavy duty transition joint probe, Type K (CHROMEGA®-ALOMEGA®), Inconel sheath, 1.5 mm OD, grounded junction, 300 mm length.