


TJ36 Series

\$52

Heavy Duty Transition Joint Probe

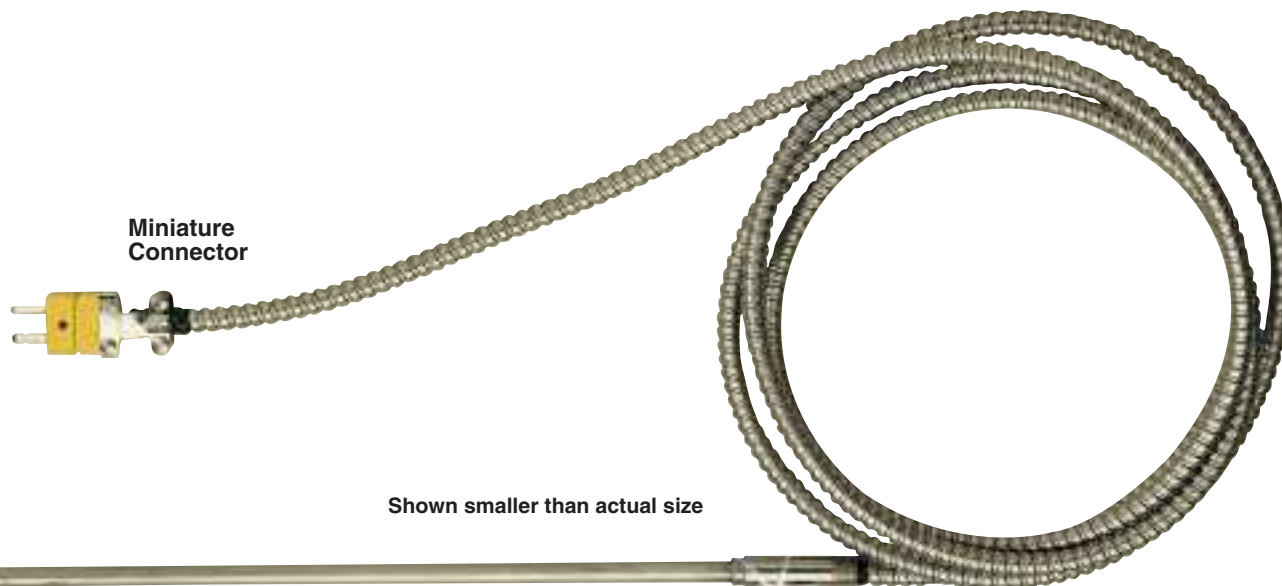

Heavy duty transition joint thermocouple, 900 mm (36") long, with 900 mm (36") BX type spiral armor cable. Available in 6, 4.5, 3, 1.5 mm ($\frac{1}{4}$, $\frac{3}{16}$, $\frac{1}{8}$ and $\frac{1}{16}$ ") OD, with Inconel 600 or 304 stainless steel sheath (consult sales for 316 SS), and SMPW subminiature connector.

[†] Other U.S. and metric lengths available, consult Sales Department

Model Number	Price	Sheath	O.D.
TJ36-(*)IN-116(**)-36-BX-SMPW-M	\$52	Inconel 600	1.5 ($\frac{1}{16}$ ")
TJ36-(*)SS-116(**)-36-BX-SMPW-M	52	304 SS	1.5 ($\frac{1}{16}$ ")
TJ36-(*)IN-18(**)-36-BX-SMPW-M	52	Inconel 600	3.0 ($\frac{1}{8}$ ")
TJ36-(*)SS-18(**)-36-BX-SMPW-M	52	304 SS	3.0 ($\frac{1}{8}$ ")
TJ36-(*)IN-316(**)-36-BX-SMPW-M	52	Inconel 600	4.5 ($\frac{3}{16}$ ")
TJ36-(*)SS-316(**)-36-BX-SMPW-M	52	304 SS	4.5 ($\frac{3}{16}$ ")
TJ36-(*)IN-14(**)-36-BX-SMPW-M	52	Inconel 600	6.0 ($\frac{1}{4}$ ")
TJ36-(*)SS-14(**)-36-BX-SMPW-M	52	304 SS	6.0 ($\frac{1}{4}$ ")

* Specify calibration: IC (type J), CA (type K), CP (type T) or CX (type E)

** Specify junction: G (grounded), U (ungrounded) or E (exposed)

Ordering Example: TJ36-CASS-116G-36-BX-SMPW-M, heavy duty TJ probe, type K, 304 SS sheath, 1.5 mm ($\frac{1}{16}$ ") OD, grounded junction, with BX armor cable, \$52

Model Number	Price	Sheath	O.D.
TJ48-(*)IN-116(**)-12-SB-SMPW-M	\$54	Inconel 600	1.5 ($\frac{1}{16}$ ")
TJ48-(*)SS-116(**)-12-SB-SMPW-M	54	304 SS	1.5 ($\frac{1}{16}$ ")
TJ48-(*)IN-18(**)-12-SB-SMPW-M	54	Inconel 600	3.0 ($\frac{1}{8}$ ")
TJ48-(*)SS-18(**)-12-SB-SMPW-M	54	304 SS	3.0 ($\frac{1}{8}$ ")
TJ48-(*)IN-316(**)-12-SB-SMPW-M	54	Inconel 600	4.5 ($\frac{3}{16}$ ")
TJ48-(*)SS-316(**)-12-SB-SMPW-M	54	304 SS	4.5 ($\frac{3}{16}$ ")
TJ48-(*)IN-14(**)-12-SB-SMPW-M	54	Inconel 600	6.0 ($\frac{1}{4}$ ")
TJ48-(*)SS-14(**)-12-SB-SMPW-M	54	304 SS	6.0 ($\frac{1}{4}$ ")

* Specify calibration: IC (type J), CA (type K), CP (type T) or CX (type E)

** Specify junction: G (grounded), U (ungrounded) or E (exposed)

Ordering Example: TJ48-CASS-116G-12-SB-SMPW-M, heavy duty TJ probe, type K, 304 SS sheath, 1.5mm ($\frac{1}{16}$ ") OD, grounded junction, with SB stainless steel overbraided cable, \$54

