


Transition Adaptors

ANSI color code shown

To order IEC color code see page A-9

All shown smaller than actual size

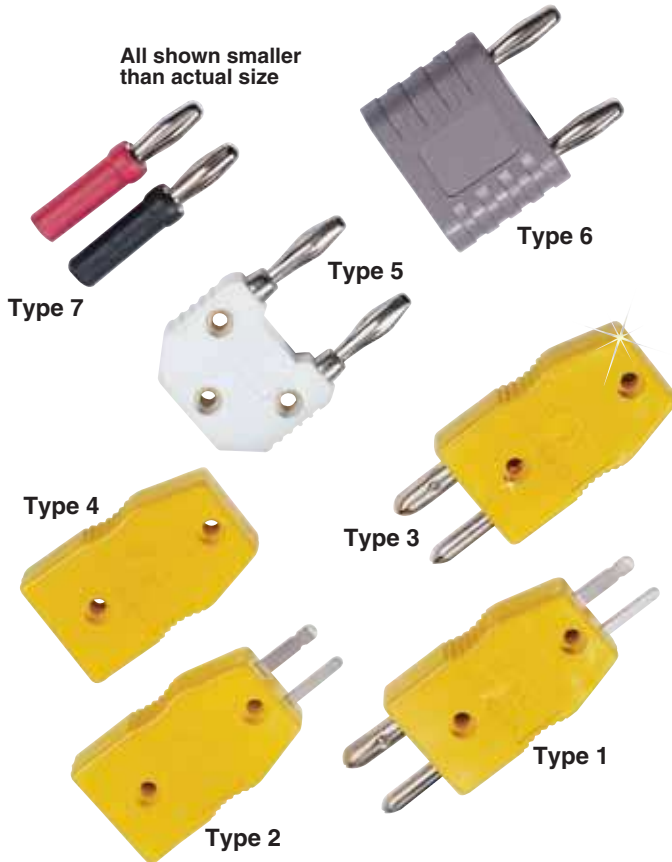

- ✓ Rugged, One-Piece Molded Construction
- ✓ ANSI or IEC[†] Color-Coded
- ✓ For Use with a Variety of Meters and Probes

TAS adaptors provide quick and easy connections between standard and miniature connector systems. These color-coded units are available in all thermocouple calibrations including Tungsten-Rhenium alloys. Any combination of male and female contacts for miniature and standard positions of the adaptor are available. The TAS-U-5, TAS-U-6 and TAS-U-7 are only available in uncompensated calibration.

MOST POPULAR MODEL HIGHLIGHTED!

To Order (Specify Model Number)		
Model No. ANSI Color Code	Description	Price
TAS-(*)-1	Male standard to male mini	\$5.00
TAS-(*)-2	Female standard to male mini	5.00
TAS-(*)-3	Male standard to female mini	5.00
TAS-(*)-4	Female standard to female mini	5.00
TAS-U-5	Male banana plug to female mini	5.00
TAS-U-6	Sheathed banana plug to banana plug	5.00
TAS-U-7	Sheathed banana plug to banana plug set	5.00

*Specify Calibration: J, K, T, E, R/S or U (uncompensated). May be ordered with G, C, or D calibration, add \$1.50 to price (models 1 and 3 not available) for a total of \$9.50. Add \$4.00 to price for N calibration for a total of \$12.00.

Ordering Example: TAS-K-2, adaptor for type K thermocouples with female connection on the standard end and male connection on the miniature end, \$5.00

[†]add suffix "-IEC" for IEC color code

PATENTED

Covered by U.S. and International Patents and Pending Applications

For connector dimensions, please see pages G-71 to G-74

Round Terminal Blocks



- ✓ ANSI or IEC[†] Color-Coded
- ✓ Allows Single or Dual Wire Pair Connection
- ✓ Rugged Glass-Filled Nylon Terminal Block Construction
- ✓ -29 to 220°C (-20 to 425°F) Temperature Rating
- ✓ Fits 1.5 to 6 mm ($\frac{1}{16}$ to $\frac{1}{4}$ ") Probes, Tubes and Cable Sheaths

NEWPORT's color-coded CH series terminal blocks are designed to fit metal-sheathed cable or probes between 1.5 and 6 mm

($\frac{1}{16}$ and $\frac{1}{4}$ ") in diameter. The CH terminal blocks use a $\frac{1}{8}$ NPT compression fitting to adapt to probes or cables (sold separately; please see page A-131).

Terminal block diameter: 31.7 mm (1.25")
thickness: 9.7 mm (0.38")

Shown actual size

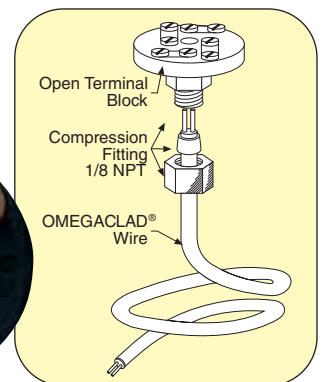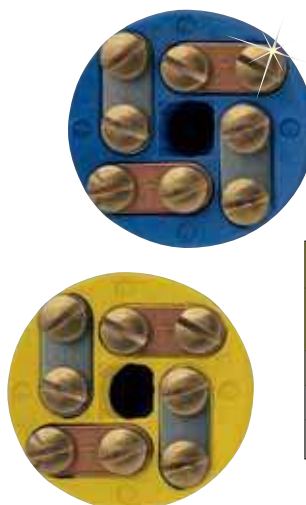

MOST POPULAR MODEL HIGHLIGHTED!

To Order (Specify Model No.)		
Model No. ANSI Color Code	# Terminals	Price
CH62-(*)	2	\$3.25
CH63-(*)	3	3.50
CH64-(*)	4	3.75

*Insert calibration code: J, K, T, E or S, for thermocouple type desired, or U for uncompensated lugs.

Ordering Example: CH62-K, two-position round terminal block, type K, \$3.25.

[†]add suffix "-IEC" for IEC color code