


Digital Color Camera Electronic – LC7K570MCL

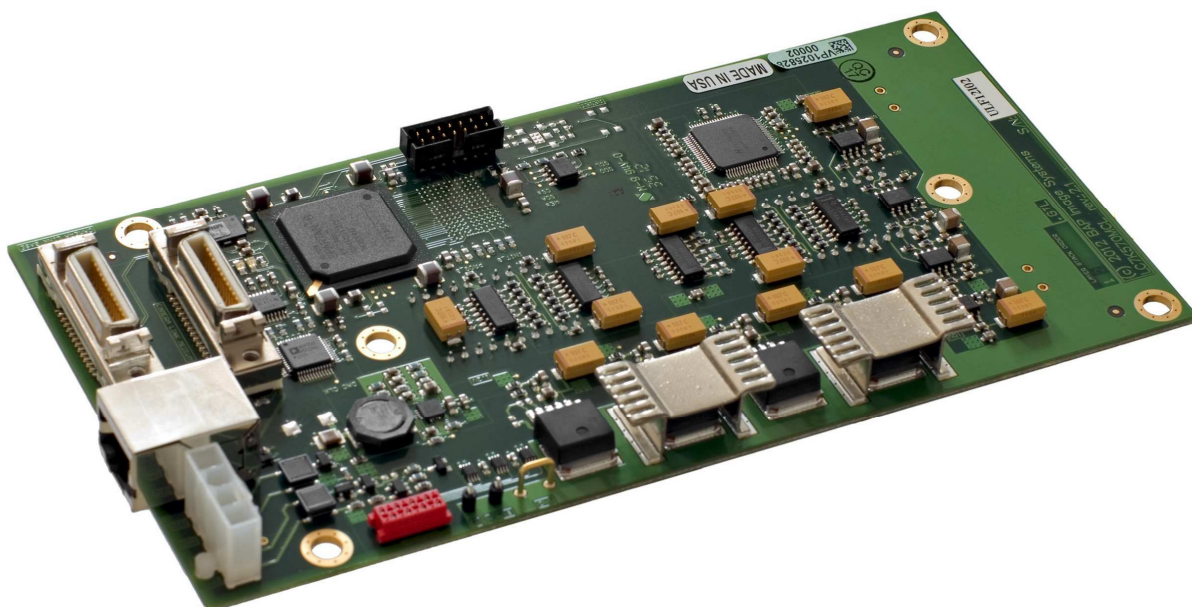

Technical description:

- Resolution: from 100 dpi up to 600 dpi for DIN A3, or 1200 dpi for DIN A5.
- Speed: (depending on the line period)
 - DIN A4 landscape 200 dpi – 128 IPS (670 DPM)
 - DIN A4 landscape 300 dpi – 60 IPS (310 DPM)
 - DIN A4 portrait 200 dpi – 160 IPS (640 DPM)
- Interfaces:
 - Native BAP G-Link (GL) serial interface for image data.
 - Dual Camera Link (CL) serial interfaces for third-party frame grabbers (Mini D Ribbon socket).
 - Bi-directional RS-232 serial communications for configuration command flow.
- Cable: UTP CAT7 (or Camera Link for image transfer and camera setup).
- Mechanically compatible with previous BAP cameras.
- Commands are backward compatible with previous BAP cameras.
- Power supply: single 12V or optional dual 12V / 5V for EMI-sensitive environments.

Advantages:

- Three-line CCD technology with a true 24-bit RGB or YUV output in the native resolution
- Pre-processing of the images
- Same device is adjustable for various applications, resolutions, and scan widths
- Adjustable active line length up to 7,500 pixels
- Adjustable line period
- Horizontal and vertical image re-scaling
- Color components alignment and re-mapping (also fractional)
- LUT-based contrast enhancement
- Shading correction for different light sources and work conditions
- RGB or YUV output image
- RS-232 interface for setup
- Many other functions included

Digital Color Camera Electronic – LC7K570MCL


The electronics of the LC7K570MCL camera are capable of capturing a true 24-bit RGB image stream up to 7500 pixels in width without a Bayer filter mosaic. This allows a high-quality 600 dpi imaging of DIN A3 documents or 1200 dpi for DIN A5 documents without any interpolation.

The unit's resolution depends upon the optical part of the camera, lighting system, and the camera's setup parameters. The camera electronics have to be mounted in the customer's optic system.

The camera is able to scan images with a defined resolution depending upon the active number of pixels. Image quality may be enhanced further using precise and adjustable color components alignment (re-mapping) capability, LUT-based contrast enhancement module. There are several processing options available already in the camera, e.g. horizontal and/or vertical anti-aliased re-scaling – allowing the user to get images in resolutions different from the native optical resolution.

The LC7K570MCL works with BAP Image Engines (IE64_57, IE64_HS, PCIeexpress Frame Grabber). BAPis IE64 Image Processing Boards support two camera inputs serviced in parallel at the same time. All necessary image processing functions can be customized using the open interface. Both image-processing units have standard USB 2.0 interfaces to the Host-PC. The hardware version of the IE64_57 can be equipped with other interfaces (USB 3.0, Ethernet).

This solution can be implemented in different paper transport systems to scan images up to 670 ppm DIN A4 format at 200 dpi.

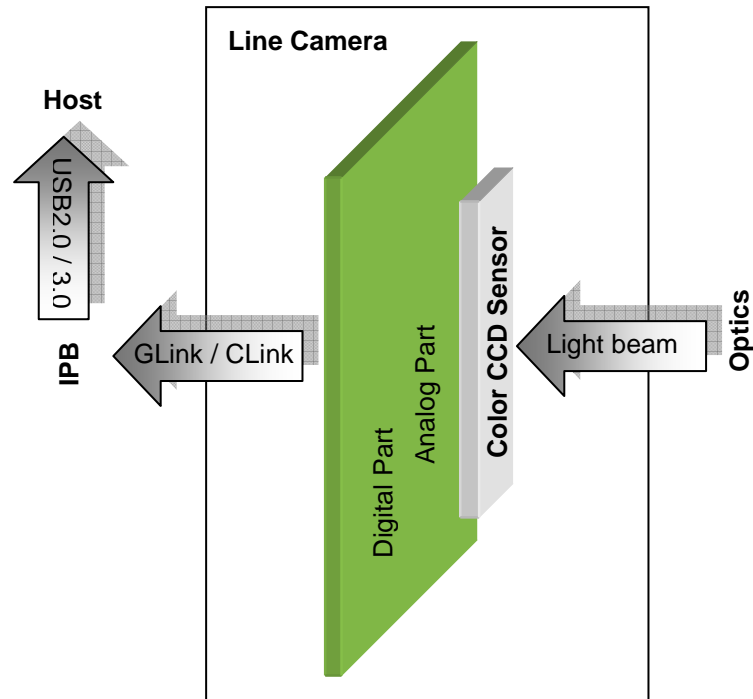

BAP Image Systems (BAPis) is a dependable and reliable imaging products and solution provider with highly proven industry experience. BAPis develops and manufactures cameras based not only on high speed CCD and CMOS line sensors, but also on area CMOS/CCD sensors. BAPis cameras are used in the machine vision industry as well as in the film industry. Additionally, BAPis develops and produces image grabbers and processing boards based on DSP and FPGA technologies using its own algorithms. Image processing boards are matched with camera performance and, when combined, are able to reach the highest possible throughput.

BAP Image Systems GmbH
Am Weichselgarten 7
91058 Erlangen, Germany
Tel: +49-9131-691540
Fax: +49-9131-691542

BAP Image Systems, LLC
1120 South Freeway, Ste 214
Fort Worth, TX 76104, USA
Tel: +1-817-878-2773
Fax: +1-817-878-2739

info@bapimaging.com
www.bapimaging.com