



### DESCRIPTION

The FLEXPOWER FP075/150-C4D8E1 is a dual voltage, offline switchmode power supply-battery charger system specifically designed for the access control segment of the lifesafety industry.

The unit is configured in a painted, steel, locking enclosure with tamper switch and integral battery space, and provides two power supplies, each of which can be set to 12 or 24V.

Eight auxiliary outputs are provided for readers, REX devices, or other similar units with each output selectable for either power supply.

Four access controlled trigger inputs control four relay based lock outputs, with each output selectable for either power supply, and programmable for fire alarm disconnect, failsafe, failsecure, or dry contact operation.

Complete fault detection and reporting, with programmable fault delays, is provided along with datalogging capability of fault occurrence, battery usage time and power supply status.

### BENEFITS

➤ Agency Listed for Access Control, Fire, Security, CCTV, and Mass Notification

➤ **FlexPower®** Feature Set

- ◆ **SureCharge** Microprocessor controlled battery charging
- ◆ **PowerCom** Power supply programming / monitoring software
- ◆ **VSelect** Installer selectable output voltage
- ◆ **TruWatt** Delivers twice the current at 12V than at 24V
- ◆ **PwrHealth** Intelligent battery charging and battery state monitoring
- ◆ **FlexConnect** Dual voltage bus / pre-wired accessory board interconnects
- ◆ **Reliability+** Full fault protection / high efficiency / fiberglass pcb
- ◆ **GreenSmart** RoHS compliant, lead free, energy efficient design
- ◆ **DataLink** Network communication interface option

➤ **System Features**

- ◆ Fully modular power management system
- ◆ Multiple outputs for system power, direct lock control and accessory power distribution modules
- ◆ Each distributed output is selectable for either continuous or switched DC in single voltage systems, or 12/24VDC in dual voltage systems
- ◆ Fire alarm interface for egress lock control (FAI)
- ◆ Configurable fail-safe / fail-secure modes of operation
- ◆ Comprehensive fault detection and reporting including optional earth ground and battery presence
- ◆ AC and System fault output relays can be delayed via PowerCom
- ◆ Microprocessor dual rate charging restores battery sets from 4 to 80Ah

➤ **Power Management & Reporting** (U.S. Patent 8,566,651)

- ◆ PowerCom® s/w monitors, programs, and reports on power supply core functions through a computer USB or network connection
- ◆ NetLink module option connects power system to a LAN/WAN network for remote programming and live diagnostics. NetLink monitors and reports power status, tests battery state and alerts via email/SNMP on system faults, AC loss, low battery or pre-scheduled service due

➤ **Lifetime Warranty**

### AGENCY LISTINGS

#### USA

UL 294 UL 1481  
 UL 603 UL 2044  
 UL 864 UL 2572  
 UL 1076  
 FCC Part 15, Subpart B  
 CSFM Approved

#### CANADA

ULC S318  
 ULC S319  
 ULC S527  
 CSA C22.2 #107.1  
 CSA 22.2 #60950

### ELECTRICAL RATINGS

Parameter	Rating		Unit
	FP075	FP0150	
Input Voltage	120 / 230	120 / 230	VAC
Input Power (max)	85	170	Watts
Output Voltage	12 or 24	12 or 24	VDC
Output Current	6 or 3	12 or 6	Amps
Battery Charge Capacity	40	80	Ah
Efficiency	83	87	%
Output Ripple	120	120	mVp-p
Line Regulation	0.1	0.1	±%
Load Regulation	2.5	2	±%
BTU Rating	99		BTU/Hr
Continuous Power Outputs	8		
Switched Power Outputs	4		
Fire Alarm Interface	Yes		

**FLEXPOWER® STANDARD FEATURES**

**SureCharge** The microprocessor controlled charging process used by the FlexPower power supply guarantees both proper charging current for the battery and fastest charge time. The constant current charger provides a linear, predictable charge time for any lead acid, gel battery set from 4 to 80 amphotours (based on charger rating) without stress or damage to the battery.

**PowerCom/PowerCom-USB** LifeSafety Power's proprietary software interface for communication with FlexPower equipment through a DATALINK or USB connection. PowerCom is used for power supply monitoring, programming, and reporting.

The NL1 DATALINK network module enhances PowerCom's capability with remote diagnostics, battery management, trouble / service email alerts via LAN/WAN, and remote on/off reset control.

The DL1 USB cable and a computer laptop USB connection, enables PowerCom-USB to be used by service personnel for onsite power supply programming and system diagnostic evaluation.

**VSelect** One single switch for configuring the output between 12 and 24VDC eliminates field errors and allows for the reduction and simplification of service inventory by eliminating the necessity of stocking units in each voltage.

**TruWatt** Output power capability of the power supply remains constant regardless of the output voltage setting. For example, a FlexPower 250 watt supply will provide 10 amps at 24VDC and 20 amps at 12VDC, allowing the same number of locking devices to be used at either the 12 or 24V setting.

**FlexConnect** The FlexPower series provides a prewired interconnection system between the power supply and accessory boards of the power system that introduces the concept of a dual voltage bus structure throughout all system modules and eliminates intermodule wiring by the field installer.

Field upgrading or expansion is as simple as using common mounting footprints, predrilled mounting holes, snap-in standoffs, and pluggable wires to add additional system capability or capacity when needed, all without restrictive agency listing issues.

**Reliability+** All power supplies within the FlexPower system are fully fault protected and feature fiberglass printed circuit boards rather than paper-based to protect the electronics from water and other corrosive elements found in industrial settings. High efficiency power supply design promotes low heat generation leading to a longer service life.

**GreenSmart** All members of the FlexPower family are RoHs compliant, lead-free, and meet the latest state, federal and European requirements for energy efficiency.

**DataLink - Smart Power Management Communication Interface** Monitor, program, control, and report key power supply functions by computer or local/wide area network using a browser interface or LifeSafety Power's PowerCom® remote management software.

Power supply network connection requires the optional NL1 network module. Power supply computer connection requires the optional DL1 USB cable.

Model No.	Type	Mechanical Info
FP075/150-C4D8E1	Fused	Size: 12" x 14" x 4.5"
FP075/150-C4PD8PE1	Power Limited	Weight: 9.5 lb.

**FlexPower Numbering System**



**Worldwide Headquarters**  
**LifeSafety Power, Inc.**  
 750 Tower Road, Unit B  
 Mundelein, IL 60060 USA  
 PH 888-577-2898  
 info@lifesafetypower.com

**FAULT DETECTION AND REPORTING**

The comprehensive fault detection and reporting mechanism of the FPO series provides for both local and remote fault reporting.

On-board visual indicators are provided to give immediate installer feedback. Independent form C relay contacts are provided to report AC and system fault conditions to remote or auxiliary equipment. A door tamper switch is included.

**Detected Fault Conditions:**

- **AC Power**
  - ◆ AC loss, AC low
- **DC Power and System**
  - ◆ Abnormal or loss of power supply operation
  - ◆ Over current, over temperature condition
  - ◆ DC output high, low
  - ◆ Battery Presence, Earth Ground (user optional)
  - ◆ Reversed battery condition, blown fuse or loss of output voltage on selected accessory boards (detected on the power supply)

**FIRE ALARM INTERFACE (FAI)**

- **Activation Methods**
  - ◆ DC voltage: 9 to 33VDC, 3 to 15mA
  - ◆ Dry contact NO/NC
- **Latch Enable: NC contact set or switch (typically for Canadian use)**


**LOCK CONTROL MODULE (C4, C4P)**

- **Four access control trip inputs**
  - ◆ Capable of activation by voltage or NO/NC dry contact
- **Four individually protected lock control outputs**
  - ◆ Supervised for blown fuse or loss of output voltage
  - ◆ Individually programmable at either voltage for: fail-safe, fail-secure, NO/NC, dry contact, and fire alarm interface for control of egress locks
  - ◆ **C4** 3A fused per output
  - ◆ **C4P** 2.5A class 2, power limited per output
- **DC Presence: Green LED per output**
- **Removable terminals: accepts #14 to #24 AWG**

**POWER DISTRIBUTION MODULE (D8, D8P)**

- **Four power distribution outputs Individually programmable to a continuous output drawn from either buss 1 or buss 2, typically used to program an output for either 12 or 24VDC**
  - ◆ **D8** 3A fused per output
  - ◆ **D8P** 2.5A class 2, power limited per output
- **DC Presence: Green LED per output**
- **Removable terminals: accepts #14 to #24 AWG**

**PERFORMANCE GRAPHS**

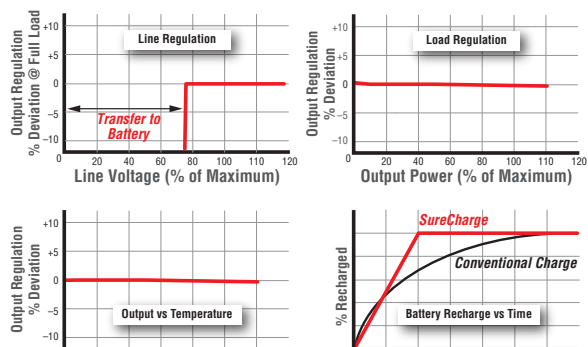

**Important:** All information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their particular application. LifeSafety Power makes no warranties as to the accuracy or completeness of the information, and disclaims any liability regarding its use. LifeSafety Power's only obligations are those in the LifeSafety Power Standard Terms and Conditions of Sale for this product, and in no case will LifeSafety Power or its distributors be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of the product. Specifications are subject to change without notice. In addition, LifeSafety Power reserves the right to make changes—without notification to Buyer—to processing or materials that do not affect compliance with any applicable specification.