



## Overview

MCLASS enclosures are engineered to house FlexPower® power management boards alongside access hardware in one compact, secure system.

The FPO Power Supply / Battery Charger provides two power outputs user selectable for 12 or 24 VDC. One output provides continuous output power for system use, the second is resettable output power, activated when the fire alarm disconnect is initiated.

For access or lock power, the D8P provides eight class 2 power limited outputs rated at 2.5A per output, each individually programmable for constant output or FAI disconnect.


MClass enclosures are painted steel with removable backplate and include lock, two (2) keys and tamper switch.

## System Features

- ◆ **FPO offline power supply**
  - 120 or 230 VAC input
  - 12 and 24 VDC outputs
  - On board Fire Alarm Interface
  - Continuous and resettable DC
- ◆ **Distributed output module**
  - Eight class II power limited at 2.5A each
- ◆ **Expansion options**
  - Increased power, multiple voltages
  - Additional distribution outputs
  - Network monitoring and reporting
- ◆ **Lifetime Warranty**

## Enclosure Features

- ◆ **Labor saving design**
  - Pre-wired FlexPower section
  - Pre-punched knockouts
  - Removeable backplate simplifies instal
  - Pre-defined hole pattern for power section
  - Access panels mount on predefined stud mounts - no drilling required
- ◆ **Other refinements**
  - 4.5" enclosure depth fits 12Ah battery
  - Wire management room
  - Tamper switch, lock, dual key set standard

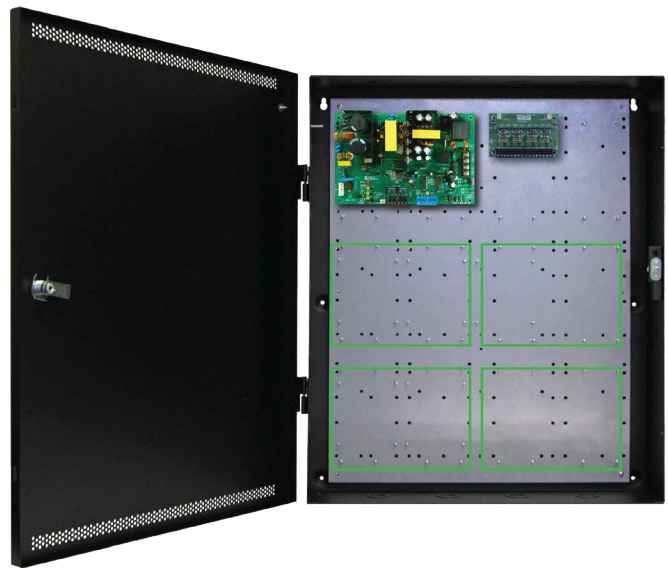


Ordering	Description
FP0150-D8PE4M	150W (12V or 24V) 8 auxiliary Class 2 outputs, MCLASS enclosure





## Specifications
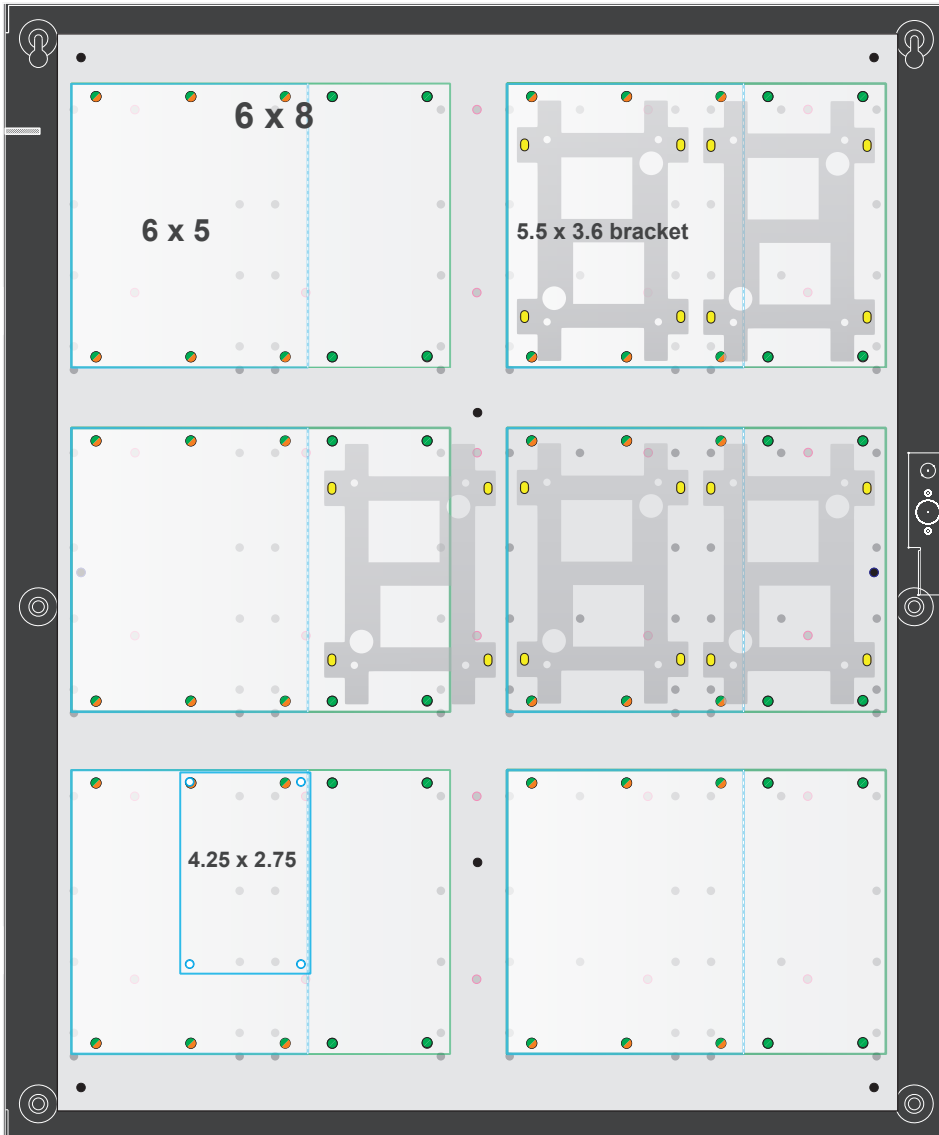
<b>Input Power</b>	Input 120/230 VAC 50/60 Hz   170 Watts (1.42A) Overload and short circuit protection Over temperature protection Polarized AC power supply disconnect
<b>Output Power</b>	FPO150: 12V/12A or 24V/6A   150 Watts Outputs: Continuous (DC1) Resettable (DC2) 8 auxiliary outputs, class II power limited at 2.5A each 120 mV output voltage ripple System Efficiency: 87%   System BTU Rating: 66 BTU/Hr
<b>Battery Charging</b>	Independent built-in 2A charger for sealed lead acid or gel type batteries Microprocessor dual rate charging of 12 or 24 V battery sets Automatic switchover to standby battery when AC fails Zero voltage drop when switched over to battery backup
<b>Supervision</b>	AC Fail (form "C" contacts) System fail (form "C" contacts) may be triggered by low/no battery, short to earth ground and power supply failure
<b>Visual Indicators</b>	AC input, DC1 and DC2 output System fault AC fault Short to earth ground Reverse battery polarity Fire Alarm Input activated D8P: DC outputs
<b>Regulatory Compliance</b>	UL294 and 1076 Class 2 FCC CSFM
<b>Physical Dimensions</b>	Enclosure: 24.00H x 20.00W x 4.50D in. (61.00 x 50.00 x 11.50 cm)
<b>Backplate mounting pattern support for</b>	EP1501, EP1502, EP2500, MR50, MR51e, MR52, MR16, MUX-8 LNL-500, 1100, 1200, 1300, 1320, 2000, 2210, 2220, 3300


**E4M / E4M1 backplate mounting pattern for power and access boards**




**E4M MOUNTING PATTERN KEY**

-  (6) slots 6 x 8 board size
-  (6) slots 6 x 5 board size
-  (5) slots 5.5 x 3.6 (bracket)
-  (1) slot 4.25 x 2.75 board size

**E4M1 MOUNTS SIX MORE 6x8 TO DOOR**



**E4M2 MOUNTS 6x8 SIZE ON DOOR ONLY**



[lifesafetypower.com](http://lifesafetypower.com)

(888) 577-2898  
 info@lifesafetypower.com

Specifications subject to change without notice.

© 2014 LifeSafety Power Inc. All rights reserved. LifeSafety Power and FlexPower are registered trademarks of LifeSafety Power Inc. All other trademarks and copyrights are the property of their respective owners.

P01-509A 03/14

LifeSafety Power, Inc.  
 750 Tower Road, Unit B  
 Mundelein, IL 60060 USA