



### Overview

MCLASS enclosures are engineered to house FlexPower® power management boards alongside access hardware in one compact, secure system.

This unit is a 12V and 24V DC dual voltage access power system.

Three C4 lock control modules provide twelve access control inputs capable of voltage or dry contact activation, and twelve outputs programmable for failsafe / false-cure operation at either 12 or 24 VDC and controlled by the integrated fire alarm interface circuit on the FPO. Two D8P modules provide sixteen auxiliary class II outputs and each output is configurable for 12 or 24VDC operation.

MClass enclosures are painted steel with removable backplate and include lock, two (2) keys and tamper switch.

### System Features

- ◆ **FPO offline power supply**
  - 120 or 230 VAC input
  - 12 and 24 VDC outputs
  - On board Fire Alarm Interface
  - Continuous and resettable DC
- ◆ **Distributed outputs**
  - 16 auxiliary, class II power limited at 2.5A each
  - 12 controlled, fused at 3A each
- ◆ **Remote Monitoring & Control option**
  - Live voltage / current reporting
  - Remote battery load testing
  - Output power cycling and abnormal operation alert
  - System / AC fault reporting

### Enclosure Features

- ◆ **Labor saving design**
  - Pre-wired FlexPower section
  - Pre-formed knockouts
  - Removeable backplate simplifies instal
  - Pre-defined hole pattern for power section
  - Access panels mount on predefined stud mounts - no drilling required
- ◆ **Other refinements**
  - 4.5" enclosure depth fits 12Ah battery
  - Wire management room
  - Tamper switch, lock, dual key set standard

### Lifetime Warranty

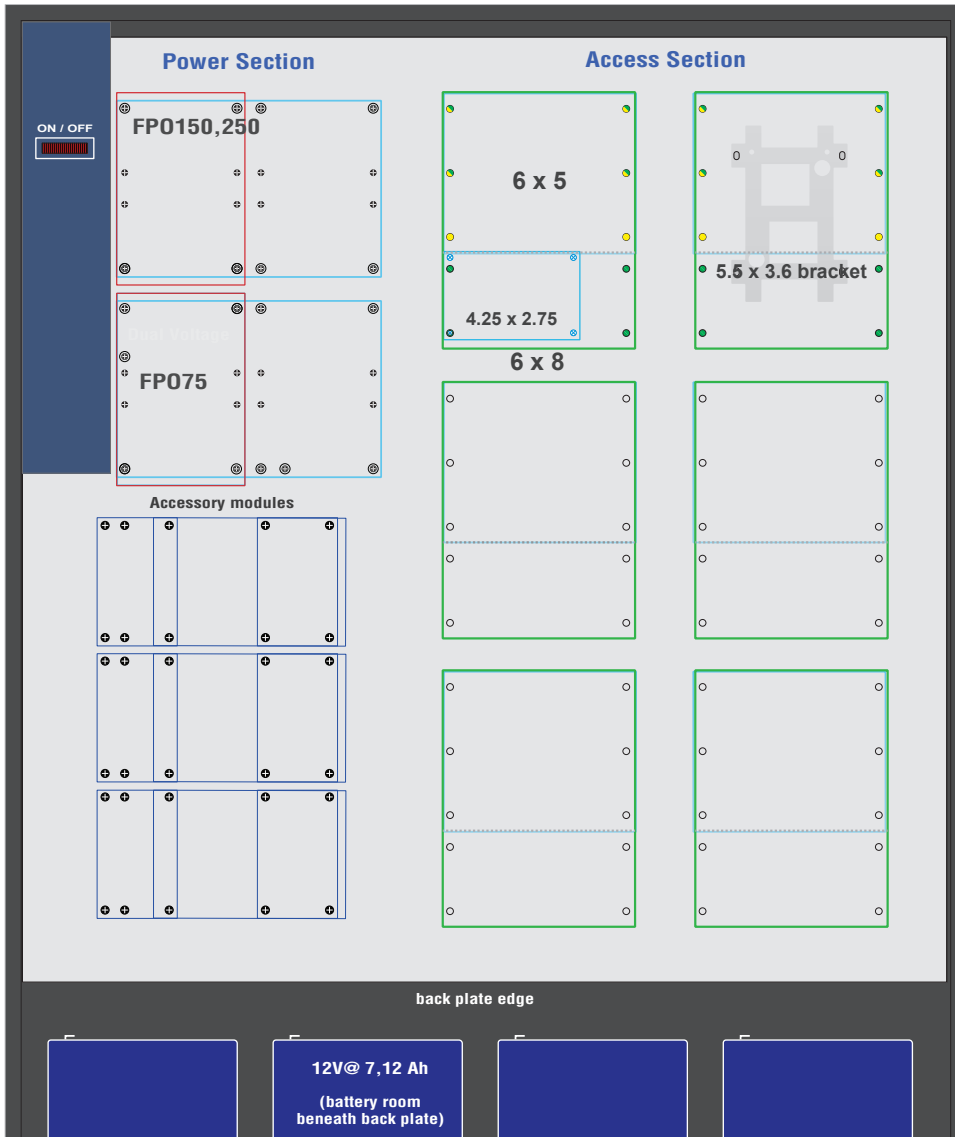


Ordering	Description
FP0150/250-3C42D8PE8M	400W (12V & 24V) 16 aux 12 lock outputs, MCLASS enclosure
Enclosure: 36.00H x 30.00W x 4.50D in. / 75 lbs	





### Specifications

<b>Input Power</b>	Input 120/230 VAC 50/60 Hz   452 Watts Overload and short circuit protection Over temperature protection Polarized AC power supply disconnect
<b>Output Power</b>	FP0150: 12V/12A or 24V/6A   150 Watts FP0250: 12V/20A or 24V/10A   250 Watts Outputs: Continuous (DC1) Resettable (DC2) 16 auxiliary outputs, class II power limited at 2.5A each 12 lock outputs, fused at 3A each 120 mV output voltage ripple System Efficiency: 87%   System BTU Rating: 175 BTU/Hr
<b>Battery Charging</b>	Independent built-in 2A charger for sealed lead acid or gel type batteries Microprocessor dual rate charging of 12 or 24 V battery sets Automatic switchover to standby battery when AC fails Zero voltage drop when switched over to battery backup
<b>Supervision</b>	AC Fail (form "C" contacts) System fail (form "C" contacts) may be triggered by low/no battery, short to earth ground and power supply failure
<b>Visual Indicators</b>	AC input, DC1 and DC2 output System fault AC fault Short to earth ground Reverse battery polarity Fire Alarm Input activated D8P output status C4 output and fault status
<b>Regulatory Compliance</b>	UL294 and 1076 Class 2 / FCC / CSFM
<b>Physical Dimensions</b>	Enclosure: 36.00H x 30.00W x 4.50D in. (91.00 x 76.00 x 11.50 cm)
<b>Access Mounting</b>	EP1501, EP1502, EP2500, MR50, MR51e, MR52, MR16, LNL-500, 1100, 1200, 1300, 1320, 2000, 2210, 2220, 3300

**E8M backplate mounting pattern for power and access boards**



**MAX ACCESS ACCOMMODATION**

-  **(6) slots** 6 x 8 board size
-  **(6) slots** 6 x 5 board size
-  **(1) slots** 5.5 x 3.6 (bracket)
-  **(1) slot** 4.25 x 2.75 board size

[lifesafetypower.com](http://lifesafetypower.com)

(888) 577-2898  
 info@lifesafetypower.com

Specifications subject to change without notice.

© 2014 LifeSafety Power Inc. All rights reserved. LifeSafety Power and FlexPower are registered trademarks of LifeSafety Power Inc. All other trademarks and copyrights are the property of their respective owners.

P01-591 07/14

LifeSafety Power, Inc.  
 750 Tower Road, Unit B  
 Mundelein, IL 60060 USA