

iDrive AC variable speed

General Purpose AC Variable Speed Drives



1Ø, 110V / 50~60Hz, 0.2~0.75kW (1/4~1HP)*

1Ø, 230V / 50~60Hz, 0.2~2.2kW (1/4~3HP)

3Ø, 230V / 50~60Hz, 0.2~2.2kW (1/4~3HP)*

3Ø, 400V / 50~60Hz, 0.75~2.2kW (1~3HP)



- CE, UL and cUL approvals
- Integrated EMC filter
- Basic & Advanced set-up parameters
- DIN rail mounting (IP20 models only)
- V/F and sensorless vector operating modes
- 8 preset frequencies
- PID control, with 'sleep' operation
- DC braking
- Thermostatic cooling fan
- PNP or NPN operation
- Remote keypad option
- PC and PDA set-up / test software
- Multi-function & RS232 and 485 option cards

Options and ordering codes

EDX - 020 - 11 - E

iDrive

Power (kW)

0.2	020
0.4	040
0.75	075
1.5	150
2.2	220

100v, 1-Phase	11
200v, 1-Phase	21
200v, 3-Phase	23
400v, 3-Phase	43

	No Filter
E	EMC Filter built in




actual size

iDrive AC variable speed

General Purpose AC Variable Speed Drives



Power & Control Connections

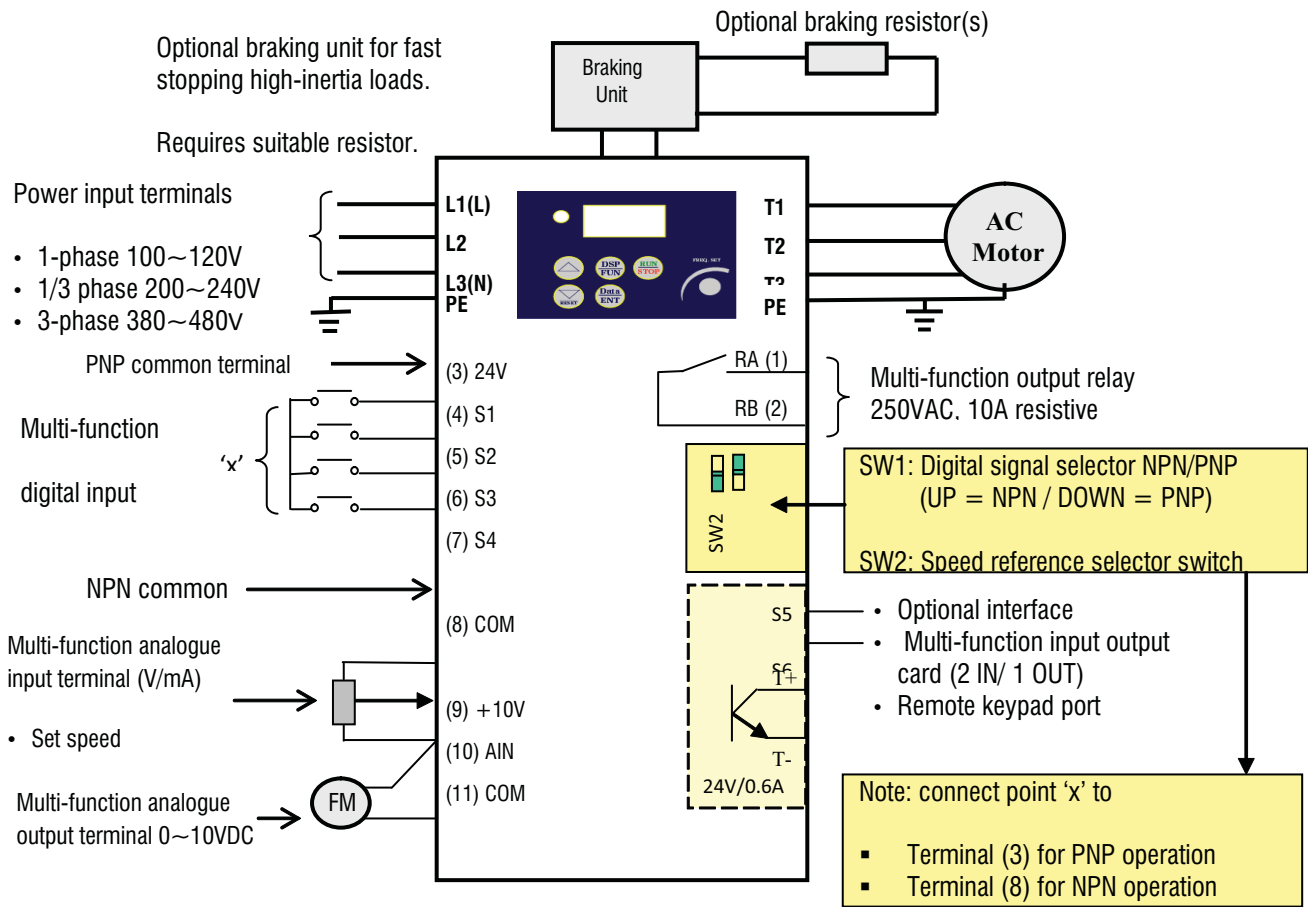

Specification & Dimensions

All Models:

- Overload (A) = 150% for 60s
- Maximum operating temperature IP20 = 50°C
- Maximum output frequency = 200Hz
- Carrier frequency = 4~16kHz (Derating applies above 10kHz)
- Safety Class = UL508C

	1-ph input 200-240V 50/60Hz					3-ph input 380~480V 50/60Hz		
Part Number EDX...	020-21	040-21	075-21	150-21	220-21	075-43	150-43	220-43
Motor rating (kW)	0.18/0.25	0.37/0.55	0.75/1.1	1.5	2.2	0.75/1.1	1.5	2.2
Motor rating (H.P)	0.25	0.5	1	2	3	1	2	3
Rated output current (A)	1.7	3.1	4.2	7.5	10.5	2.3	3.8	5.2
Frame size	1	1	1	2	2	2	2	2

Frame size IP20	H(mm)	H(inches)	W(mm)	W(inches)	D(mm)	D(inches)
1	132	5.2	77	3.03	130.5	5.13
2	132	5.2	118	4.65	148	5.83