

-

SRDA		H	-	1C	1	NIL	-	S	L	-	12VDC
Sensitivity											Coil Voltage
Standard											
Sensitive (SPNO only)		H									
Contact Form											
SPNO				1A				S	Sealed		
SPCO				1C							
Terminal Type											
Layout 1				1		NIL	AgNi				
Layout 2				2		N1	AgNi + Au Plated				

Contact Arrangement	1A, 1C	
Initial Contact Resistance Max.	70mΩ (at 1A/24VDC)	
Contact Material	AgNi, AgNi + Au Plated	
Contact Rating (Res. Load)	1A Standard/Sensitive	1C Standard
	5A/250VAC 5A/30VDC	3A/250VAC 3A/30VDC
Max. switching voltage	250VAC/30VDC	
Max. switching current	5A	
Max. switching power	1250VA/150W	
Mechanical life	1x10 ⁶ ops	
Electrical life	1x10 ⁵ ops	

Nominal Voltage VDC	Pick-up Voltage VDC	Drop-out Voltage VDC	Max. allowable Voltage VDC (at 20 °C)	Coil Resistance Ω
3	2.25	0.15	3.9	$20 \pm 10\%$
5	3.75	0.25	6.5	$55 \pm 10\%$
6	4.50	0.30	7.8	$80 \pm 10\%$
9	6.75	0.45	11.7	$180 \pm 10\%$
12	9.00	0.60	15.6	$320 \pm 10\%$
18	13.5	0.90	23.4	$720 \pm 10\%$
24	18.0	1.20	31.2	$1280 \pm 10\%$
48	36.0	2.40	62.4	$5120 \pm 10\%$

Initial Insulation resistance		1000MΩ @ 500VDC
Dielectric Strength	Between coil & contact	5000VAC 1min.
	Between open contacts	1000VAC 1min.
Operate time (at nomi. Volt)		Max. 8ms
Release time (at nomi. Volt)		Max. 4ms
Humidity		35% to 95%
Ambient temperature		-40 °C to 85 °C
Shock resistance	Functional	100m/s ²
	Destructive	1000m/s ²
Vibration resistance		1.65mm, 10 to 55Hz
Termination		PCB
Unit Weight		Approx. 4.6g
Construction		Sealed

Nominal Voltage VDC	Pick-up Voltage VDC	Drop-out Voltage VDC	Max. allowable Voltage VDC (at 20 °C)	Coil Resistance Ω
3	2.25	0.15	5.1	45±10%
5	3.75	0.25	8.5	125±10%
6	4.50	0.30	10.2	180±10%
9	6.75	0.45	15.3	400±10%
12	9.00	0.60	20.4	720±10%
18	13.5	0.90	30.6	1600±10%
24	18.0	1.20	40.8	2800±10%

Subminiature Intermediate Power Relay SRDA



Coil


Coil power	Standard: 0.45W, Sensitive: 0.2W
------------	----------------------------------

Safety Approval Ratings

UL	1 Form A	5A/250VAC @ 85°C 1/8HP, 125VAC/250VAC 3A/250VAC cos phi=0.4 C300
	1 Form C	3A/250VAC 3A/30VDC
VDE		5A/250VAC @ 85°C 5A/30VDC @ 85°C

Outline dimensions (mm)

Wiring diagram and PC Board layout

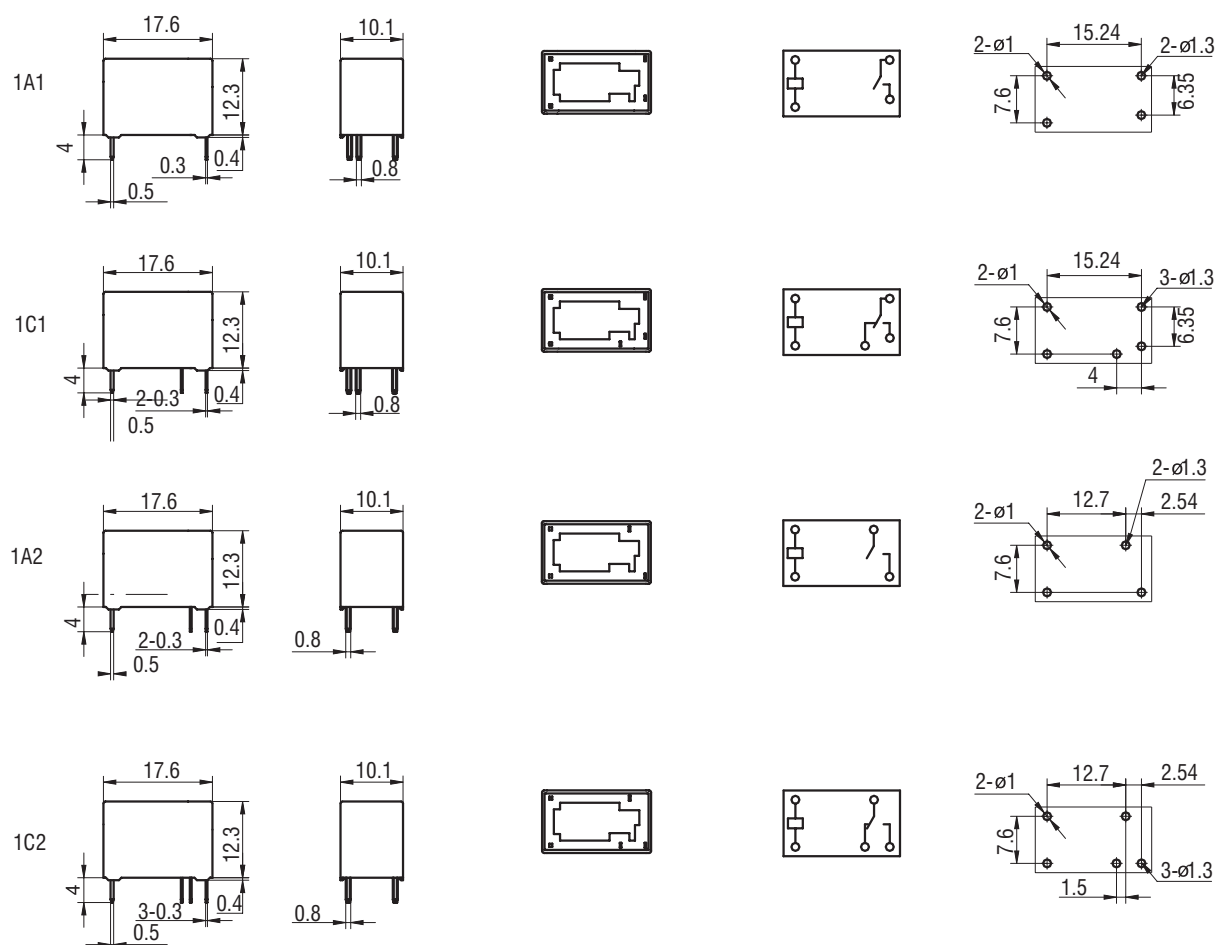

Characteristic Curve

