


25 Mbps ATM Transmit & Receive UTP Interface Module

EPA2864GE




- Designed to work with ATM 25.6 PHY Applications
- Robust construction allows for IR/VP processes
- Operating Temperature Range : -40°C to +85°C
- 1500 Vrms Isolation


Electrical Parameters @ 25° C

Return Loss (dB Min.)		Insertion Loss (dB)					CMRR (dB Min.)			Crosstalk (dB Min.)		
1-17 MHz	17-25 MHz	12 KHz	4 MHz	16 MHz	24 MHz	36 MHz	5 MHz	20 MHz	200 MHz	5 MHz	16 MHz	24 MHz
-16	-9	-3 Max.	-0.6 Max.	-1 Max.	-1.8 Max.	-10 Min.	-20	-25	-20	-50	-50	-46

• Filter Characteristic Impedance : 100 Ω •

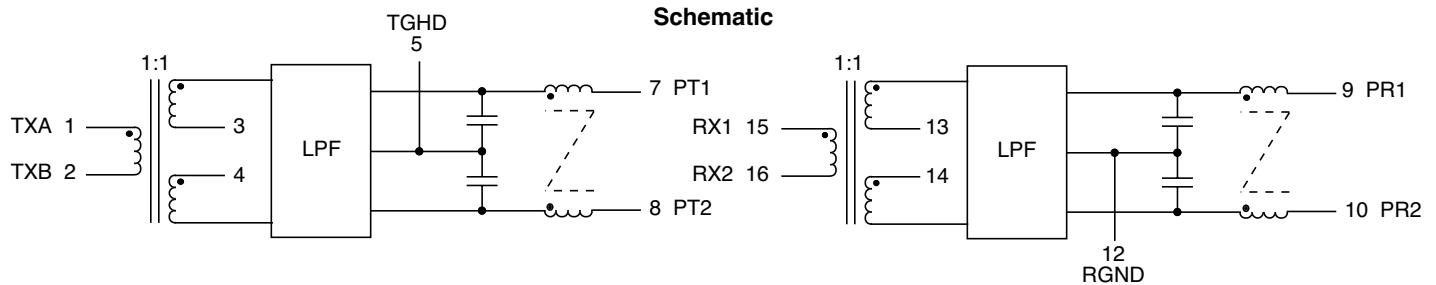

Package

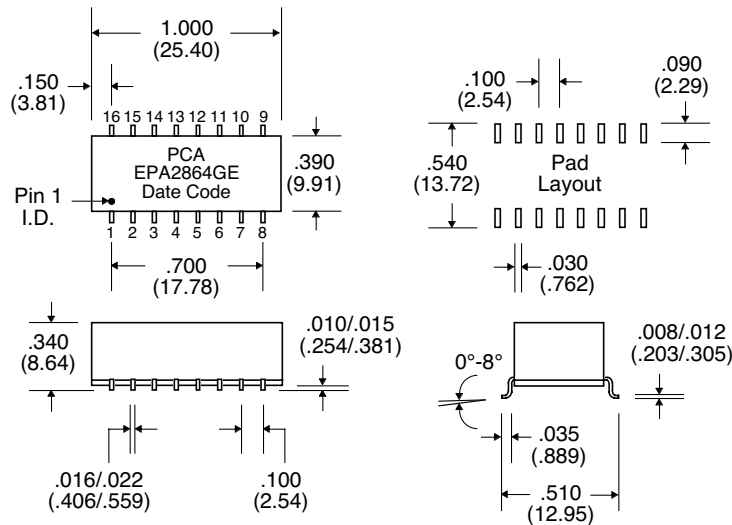

Unless Otherwise Specified Dimensions are in Inches /mm ±.010 / .25