


- Operating Temperature : -40°C to +85°C
- Storage Temperature : -40°C to +130°C
- Operating Frequency : 50 KHz and Up
- Lead-Free

Electrical Parameters @ 25° C


Primary Inductance (μ H Min.)	Leakage Inductance (μ H Max.)	ET (V μ Sec. Max.)	Pri.-Sec. Insulation (Vdc)	DCR (Ω Max.)	
				Pri.	Sec.
785	0.46	9.7	1500	0.60	0.60

Package

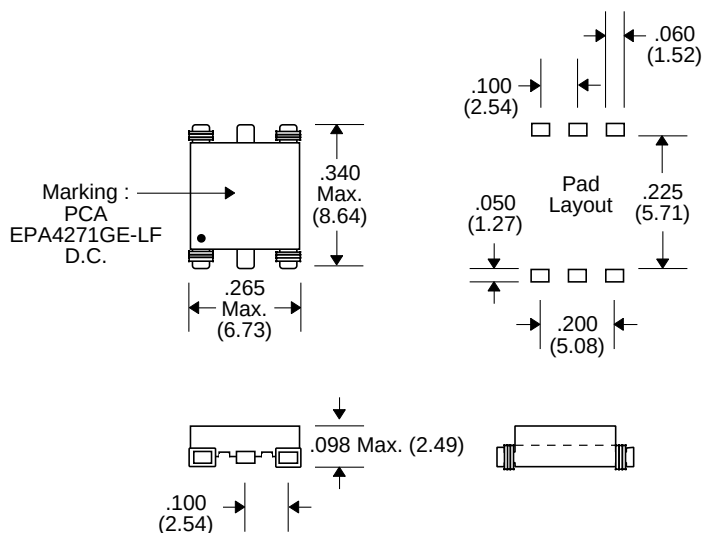

Coplanarity : $\pm .005$ Max. (.130)

Schematic



Notes :	EPA4271GE-LF
1. Lead Finish	Hot Dipped Sn or SnCu
2. Peak Temperature Rating	250°C
3. Moisture Sensitive Levels	MSL = 1 (Unlimited, $\leq 30^\circ\text{C}/60\%\text{RH}$)
4. Weight	0.28 grams
5. Packaging Information	(Tube) 60 pieces/tube
	(Tape & Reel) 1500 pieces/13" reel

Unless Otherwise Specified Dimensions are in Inches /mm $\pm .010$ / .25