


- Used in Flyback Topology Converter
- Bobbin : UL94V-0 Recognized Materials
- UL 1446 Class B Insulation System
- Gapped Transformer

Electrical Parameters @ 25° C


Inductance ($\mu\text{H} \pm 10\%$)	DCR (Ω Typ.)					Turns Ratio				Leakage Inductance (μH Typ.)	Dielectric Rating (Vac)	
@ 100 KHz, 0.1 Vrms										@ 100 KHz, 0.1 Vrms		
29	.054	.193	.071	.545	.071	2.59:1	.136:1	.41:1	.136:1	.30	1000	
Pins 1-2	Pins 1-2	Pins 5-6	Pins 12-11	Pins 10-9	Pins 8-7	Pins 10-9:1-2	Pins 12-11:1-2	Pins 5-6:1-2	Pins 8-7:1-2	Pins 1-2 All other wdg's shorted		Wdg's to Wdg's

Schematic

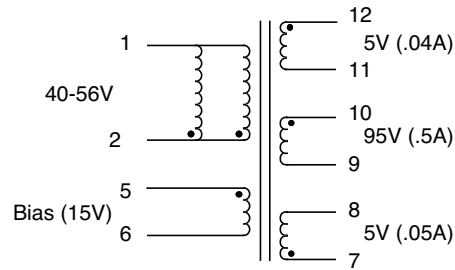

Pins 3 & 4 Not Connected

Package

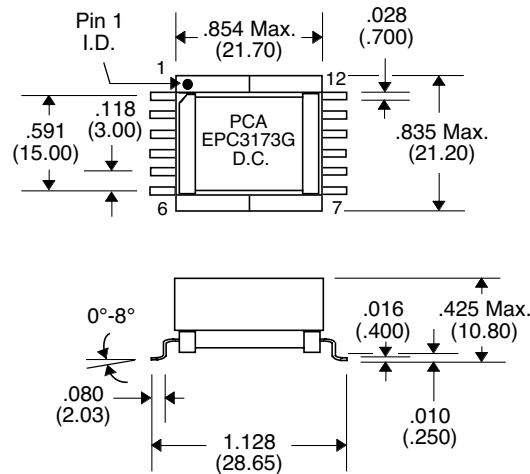

Unless Otherwise Specified Dimensions are in Inches /mm $\pm .010 / .25$