

## EPA2163




- Applications including FDDI-TP, Token Ring, Ethernet/10Base-T, ISDN, T1/CEPT/ISDN-PRI, and Fast Ethernet 10/100Base-T
- High impedance to minimize Common Mode Noise
- Complies with or exceeds IEEE Requirements
- Data Line Filters for EMI Noise Suppression


### Electrical Parameters @ 25° C

OCL ( $\mu\text{H}$ Min.)	Interwinding Capacitance (pF Max.)	Leakage Inductance ( $\mu\text{H}$ Max.)	DCR ( $\Omega$ Max.)
@ 100 KHz, 0.1 Vrms	@ 100 KHz, 0.1 Vrms	@ 100 KHz, 0.1 Vrms	
85	12	0.25	0.20


### Schematic



### Impedance Vs Frequency

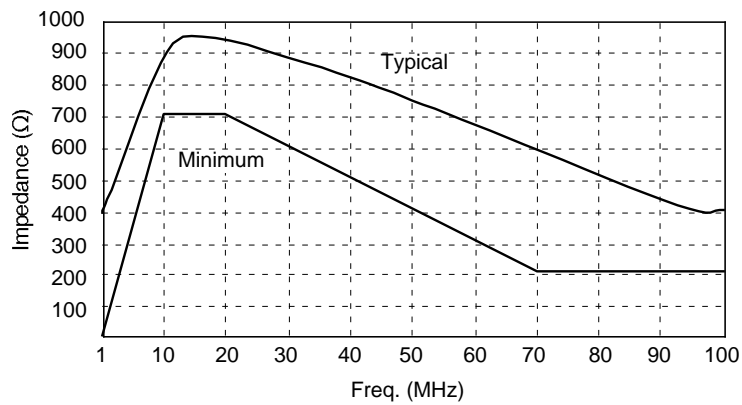

### Package

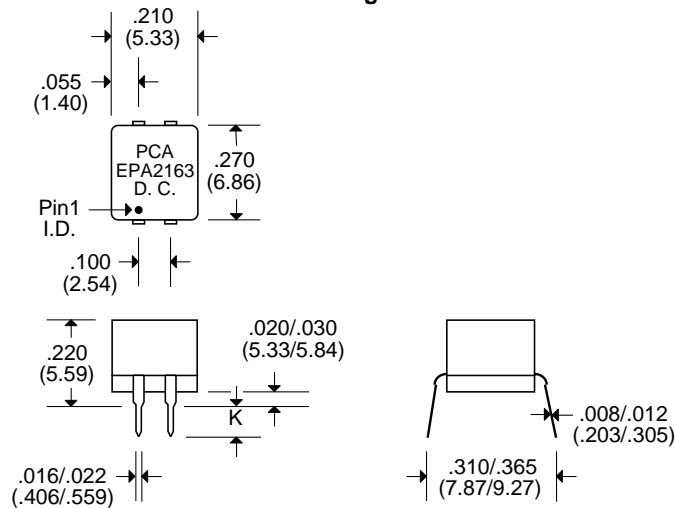

Unless Otherwise Specified Dimensions are in Inches /mm  $\pm .010 / .25$